

TEMPERATURE MAINTENANCE SYSTEMS

PLA Heating plates



Characteristics

- Easy to fit.
- Stands up well to the climatic, physical and chemical conditions encountered in the railway environment.
- Special production on request.



Applications

Heating plates are specially designed for protecting railway switches from freezing.

They are fixed by means of stainless steel clips.

Several plates can be connected in series (15 maximum). Connections between plates are made by means of tubular connectors and heat-shrink sheaths.

To ensure that these heating elements enjoy a long service life, we recommend using a control device.

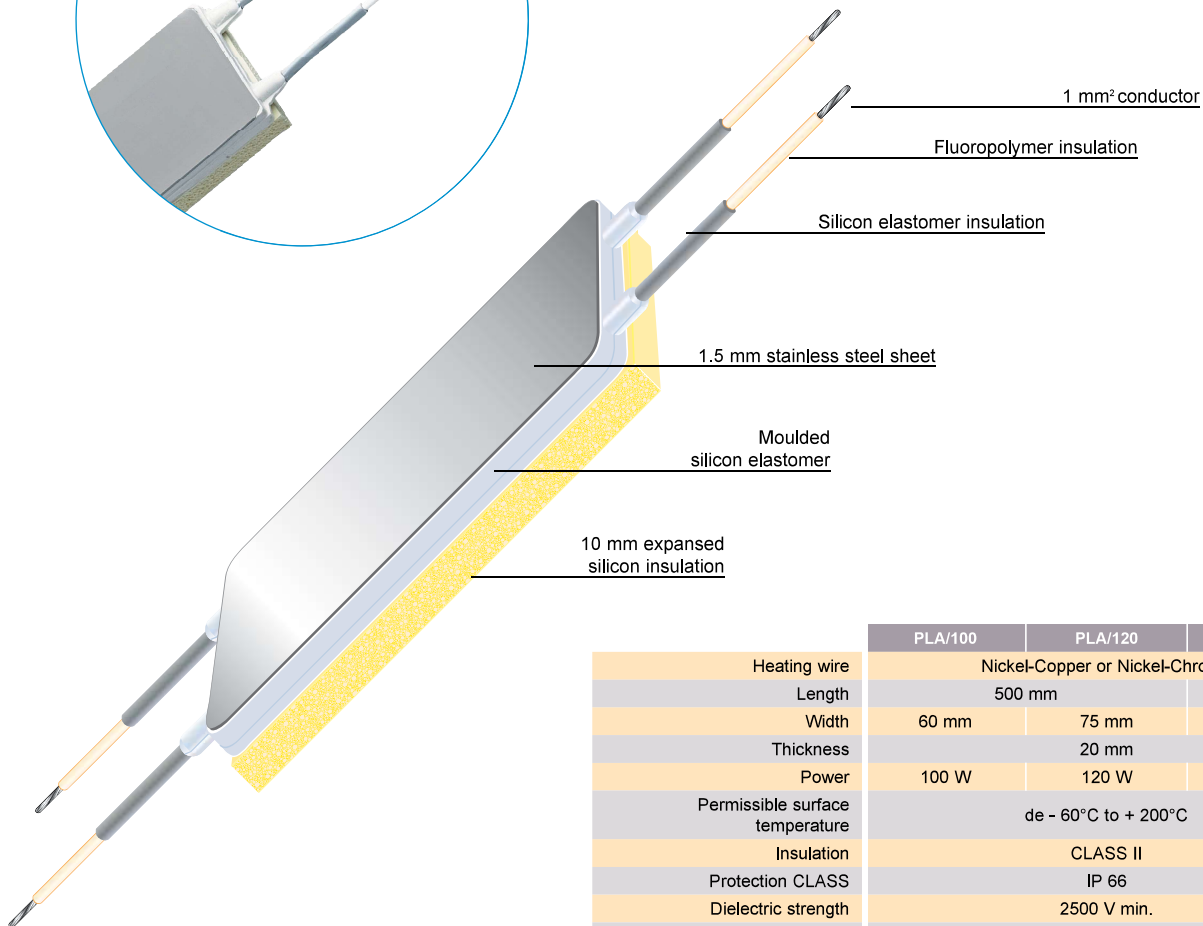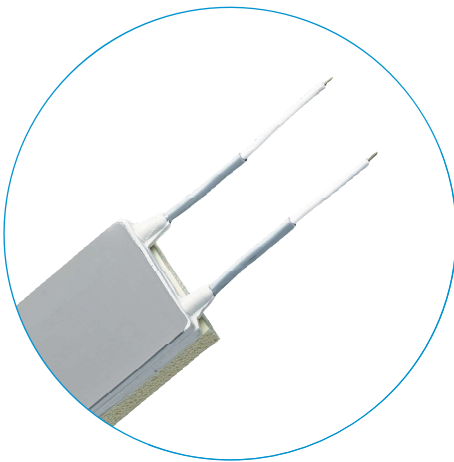

Standards

CEI 62395-1
CEI 62395-2

NF EN 60077-1
NF EN 60077-2

	PLA/100	PLA/120	PLA/200
Heating wire	Nickel-Copper or Nickel-Chrome		
Length	500 mm		
Width	60 mm	75 mm	110 mm
Thickness	20 mm		
Power	100 W	120 W	200 W
Permissible surface temperature	de - 60°C to + 200°C		
Insulation	CLASS II		
Protection CLASS	IP 66		
Dielectric strength	2500 V min.		
Insulation resistance	100 MΩ min.		
Weight	Approx. 1 kg		

Use

Consult the pages of the catalogue devoted to the corresponding general operating principles, general instructions for use and accessories.

FLEXELEC S.A.S

10, rue des frères Lumière
Z.A. du Bois Rond
69720 ST BONNET DE MURE - FRANCE
Tél : + 33 (0)4.72.48.30.90

E-mail : flexelec@omerin.com

FLEXELEC Dept

OMERIN ASIA Pte Ltd
51 Goldhill Plaza #08-11
SINGAPORE 308900
Tel : + 65.6255.4778
Fax : + 65.6255.4779

E-mail : sales@omerin.com.sg

FLEXELEC (UK) Ltd

Unit 11 Kings Park Industrial Estate
Primrose Hill - KINGS LANGLEY
Hertfordshire - WD4 8ST - UK
Tel : + 44 (0) 1923.274477
Fax : + 44 (0) 1923.270264

E-mail : sales@omerin.co.uk

FLEXELEC Dept

OMERIN GmbH
Buchwiese 16
D-65510 IDSTEIN - GERMANY
Tel : + 49 (0) 6126.94.31-0
Fax : + 49 (0) 6126.83.999

E-mail : omeringmbh@omerin.com