

TEMPERATURE MAINTENANCE SYSTEMS



CP1 Terminated PVC insulated cables

Characteristics

The main characteristic of this type of cable is that there is no extra thickness at the cold junction, identified with a black mark

- cables on request.
- Special production on request.

Applications

CP1 heating cables are mainly incorporated in household electrical or refrigeration equipment and special, mass-produced machines requiring protection against freezing or temperature maintenance.

To ensure that these heating elements enjoy a long service life, we recommend using a control device.




Standards

- CEI 62395-1
- CEI 62395-2
- UL758 (UL) on request
- CE22.2 N° 210 (cUL) on request



CP1
Termination

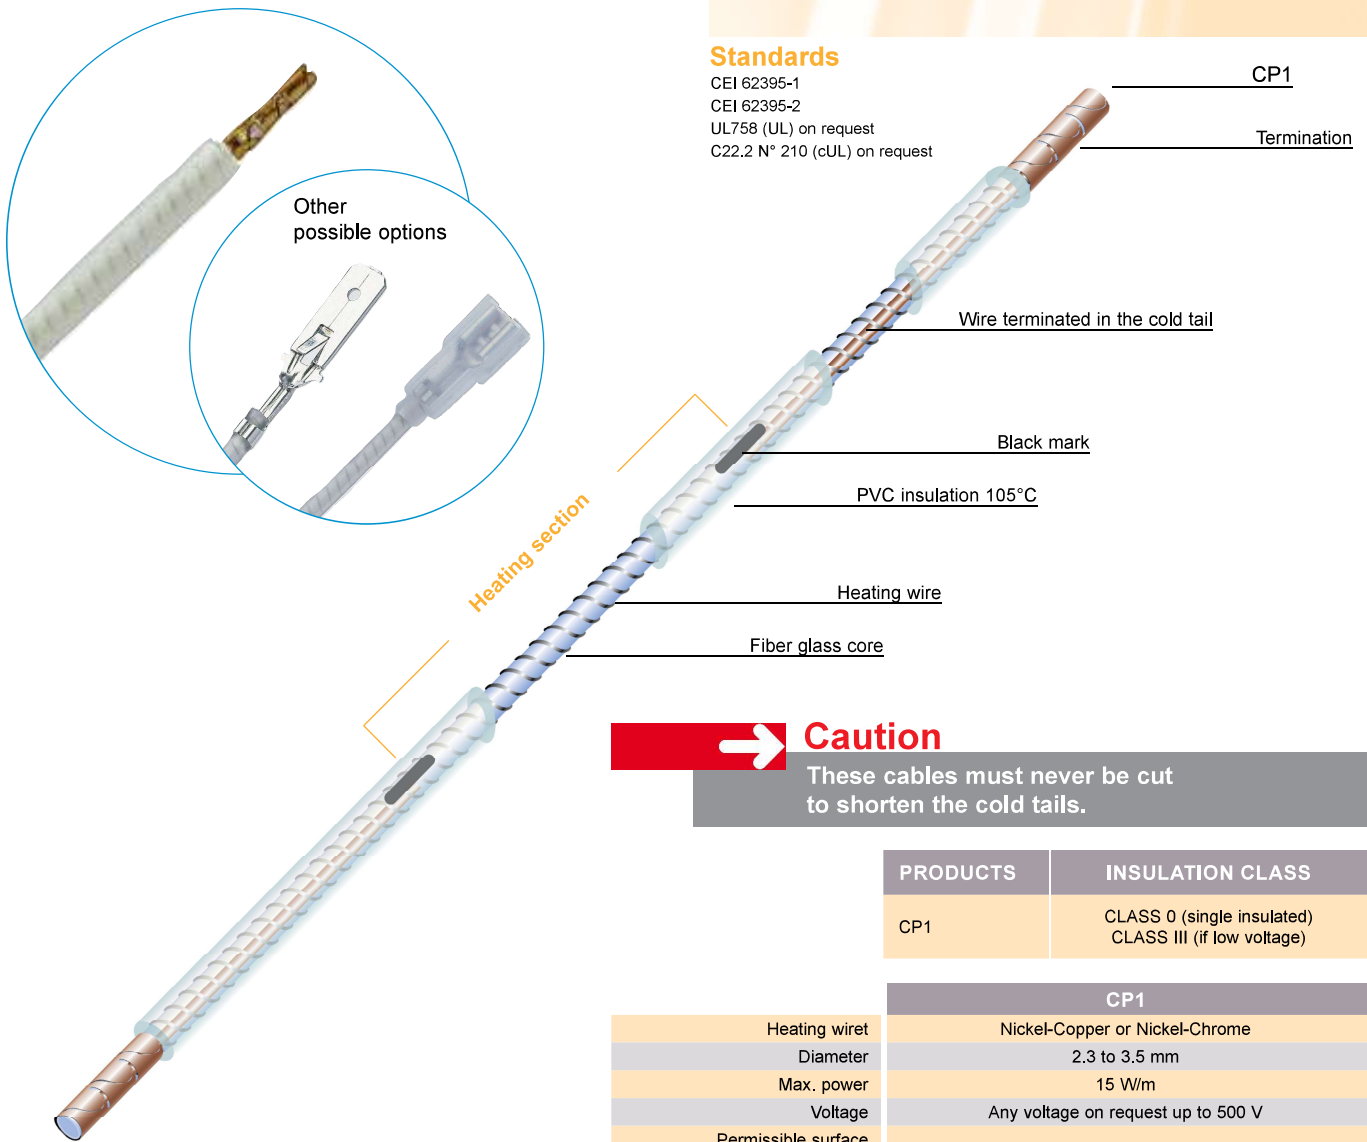

Caution
These cables must never be cut to shorten the cold tails.

Use

Heating cables are series resistors. Consult the pages of the catalogue devoted to the corresponding general operating principles, general instructions for use and accessories.

PRODUCTS	INSULATION CLASS
CP1	CLASS 0 (single insulated) CLASS III (if low voltage)

CP1	
Heating wire	Nickel-Copper or Nickel-Chrome
Diameter	2.3 to 3.5 mm
Max. power	15 W/m
Voltage	Any voltage on request up to 500 V
Permissible surface temperature	from - 30°C to + 105°C
Tolerances	Power : ± 10 % Diameter : + 0.2 / - 0.1 mm Length : ± 1 %
Max. current	2 A
Ingress protection code	IP 66
Minimum bending radius	6 x the diameter

FLEXELEC S.A.S
10, rue des frères Lumière
Z.A. du Bois Rond
69720 ST BONNET DE MURE - FRANCE
Tél : + 33 (0)4.72.48.30.90
E-mail : flexelec@omerin.com

FLEXELEC Dept
OMERIN ASIA Pte Ltd
51 Goldhill Plaza #08-11
SINGAPORE 308900
Tel : + 65.6255.4778
Fax : + 65.6255.4779
E-mail : sales@omerin.com.sg

FLEXELEC (UK) Ltd
Unit 11 Kings Park Industrial Estate
Primrose Hill - KINGS LANGLEY
Hertfordshire - WD4 8ST - UK
Tel : + 44 (0) 1923.274477
Fax : + 44 (0) 1923.270264
E-mail : sales@omerin.co.uk

FLEXELEC Dept
OMERIN GmbH
Buchwiese 16
D-65510 IDSTEIN - GERMANY
Tel : + 49 (0) 6126.94.31-0
Fax : + 49 (0) 6126.83.999
E-mail : omeringmbh@omerin.com