


H07V2-U

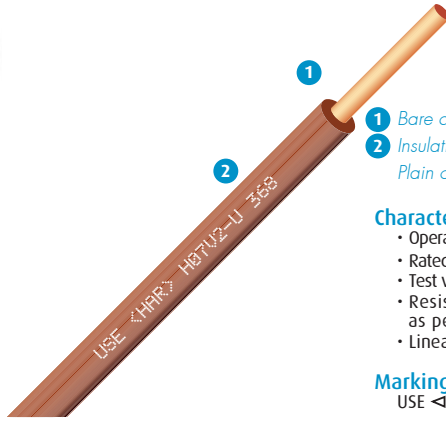

- 1 Bare copper class 1 - IEC 60228
- 2 Insulation : PVC type T13 - EN 50363-3
Plain or two-tone colors

Characteristics

- Operating temperature range : -5°C to +90°C
- Rated voltage : 450/750 V
- Test voltage : 2500 V
- Resistance to vertical flame propagation for a single insulated wire as per IEC 60332-1-2
- Linear resistance at 20°C as per IEC 60228

Marking

USE <HAR>H07V2-U 368

Certifications - Standards

EN 50525-2-31, EN 50525-1, IEC 60332-1-2

Packaging

Coils. Reels. Drums SILIBOX®.

Options

Tinned copper class 1 : consult us.

Applications

Lead wire for lighting equipments used in high temperature conditions.
Conditions of installation according to NF C 15-100.

Nominal section (mm ²)	Nominal composition	Nominal outside diameter (mm)	Approximate linear weight (kg/km)
1.5	1 x 1.38	2.8	20
2.5	1 x 1.75	3.4	32