


H07V2-K

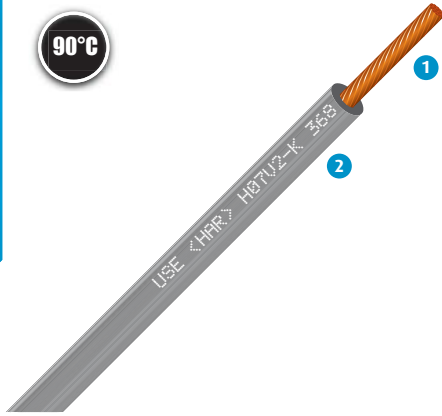

- 1 Flexible bare copper core, class 5 - IEC 60228
- 2 Insulation : PVC type T13 - EN 50363-3
Plain or two-tone colours

Characteristics

- Operating temperature range : -5°C to +90°C
- Rated voltage : 450/750 V
- Test voltage : 2500 V
- Resistance to vertical flame propagation for a single insulated wire as per IEC 60332-1-2
- Linear resistance at 20°C as per IEC 60228

Marking

USE <HAR> H07V2-K 368

Certifications - Standards

EN 50525-2-31, IEC 60228, IEC 60332-1-2

Packaging

Coils. Reels. Drums. SILIBOX®.

Options

Flexible tinned copper core : consult us.

Applications

Lead wire for electrical cabinets, electrical appliances used in high temperature conditions. Conditions of installation according to NF C 15-100.

Nominal cross-section (mm ²)	Nominal composition	Nominal outside diameter (mm)	Approximate linear weight (kg/km)
1.5	30 x 0.250	3.0	20
2.5	50 x 0.250	3.6	31
4	56 x 0.300	4.3	47
6	84 x 0.300	4.8	65
10	80 x 0.400	6.1	114
16	112 x 0.400	7.1	170
25	192 x 0.400	8.7	296
35	272 x 0.400	10.6	340