


SILICOUL® SCR 6.6 kV

-60 °C to +180 °C

SILICONE INSULATED MEDIUM VOLTAGE
POWER CABLES WITH REINFORCING BRAID

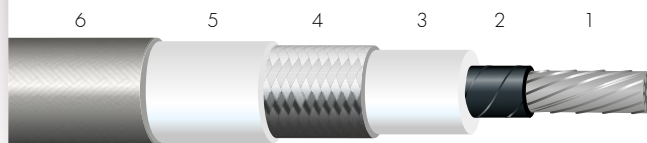

- 1 • Flexible tin-plated copper core – class 5 as per IEC 60228.
- 2 • Semi-conductor tape(s).
- 3 • Insulation: Silicone rubber.
- 4 • Electrical shielding: Tin-plated copper braid.
- 5 • Sheath: Silicone rubber.
- 6 • Reinforcement: Coated synthetic fibre braid.

Approvals - standards

- Compliance with the standards: IEC 60228, IEC 60331-11/21, IEC 60332-1-1/2, IEC 60332-3-22 category A and IEC 60754-2.

Applications

- All industrial applications for which power cables can be submitted to electromagnetic disturbances.
 - Cabling for rotating machines: motors, alternators, generators.
 - Cabling for static machines: transformers, inductors, inverters, choppers.
 - Power cabinets.

Options

- Extra-flexible tin-plated copper core – class 6 as per IEC 60228: contact us.
- Flexible or extra-flexible bare copper, silver-plated or nickel-plated copper core – class 5 or 6 as per IEC 60228: contact us.
 - Outer flexible armour:
 - > Galvanised steel braid (ref. SILICOUL® SCR BG 6.6 kV): contact us.
 - > Stainless steel braid (ref. SILICOUL® SCR BI 6.6 kV): contact us.
 - Multi-conductor cable made up of an assembly of several single conductor cables SILICOUL® SCR 6.6 kV: contact us.
 - Outer marking: contact us.
 - Other colours: contact us.
 - Other nominal cross-sections: contact us.
 - Other options and/or combinations of the options outlined above: contact us.

Characteristics

General

- Continuous operating temperature : -60 °C to +180 °C.
- Good resistance to oil and hydrocarbons.
- Good mechanical strength.

Electrical

- Rated voltage: 6.6 kV.
- Test voltage: 15 kV.

Standard products

- Standard insulation colour: white.
- Standard sheath colour: white.
- Standard reinforcing braid colour: grey.

SILICOUL® SCR 6.6 kV

Flexible core • class 5 as per IEC 60228

Nominal cross-section (mm ²)	Nominal stranding	Maximum linear resistance at 20 °C (Ω/km)
2.5	50 x 0.25	8.21
4	56 x 0.30	5.09
6	84 x 0.30	3.39
10	80 x 0.40	1.95
16	126 x 0.40	1.24
25	196 x 0.40	0.795
35	276 x 0.40	0.565
50	396 x 0.40	0.393
70	360 x 0.50	0.277
95	485 x 0.50	0.210
120	608 x 0.50	0.164
150	756 x 0.50	0.132
185	944 x 0.50	0.108
240	1221 x 0.50	0.0817
300	1525 x 0.50	0.0654
400	2037 x 0.50	0.0495

INSULATED WIRE OR CABLE

Nominal diameter (mm)	Approximate linear weight (kg/km)
11.8	161
12.4	185
13.3	223
14.5	275
15.8	359
17.5	473
19.9	626
22.0	805
23.9	1039
25.8	1293
28.6	1594
30.2	1950
33.3	2376
37.4	3059
39.8	3640
45.0	4720

For this product, please contact:

OMERIN division principale
Zone Industrielle - F 63600 Ambert
Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10
omerin@omerin.com

www.omerin.com

omerin
LES CABLES DE L'EXTREME

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.
For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.
© Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.