

HIGH TEMPERATURE MEDIUM VOLTAGE  
POWER CABLES**SILICOUL® DI**  
**Style 3661 - 1.1 kV****UL and cUL approval**  
**-60 °C to +180 °C****Approvals - standards**

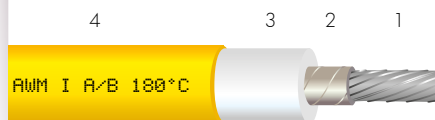
- UL approval (180 °C / 1100 V) as per UL 758 standard – File n°: E101965.
- cUL approval (CSA 180 °C / 1000 V) as per C22.2 N° 210 standard – File n°: E101965.
- Compliance with the standard: IEC 60228.
  - Horizontal flame as per UL approval.
- FT1 and FT2 flame ratings as per cUL approval.

**Applications**

- Cabling for rotating machines: motors, alternators, generators.
- Cabling for static machines: transformers, inductors, inverters, choppers.
  - Power cabinets.

**Options**

- Extra-flexible tin-plated copper core – class 6 as per IEC 60228: contact us.
- Flexible or extra-flexible bare copper, silver-plated or nickel-plated copper core – class 5 or 6 as per IEC 60228: contact us.
- Multi-conductor cable made up of an assembly of several single conductor cables SILICOUL® DI Style 3661 - 1.1 kV: contact us.
  - Other colours: contact us.
- Other nominal cross-sections: contact us.
  - Other options and/or combinations of the options outlined above: contact us.

SILICONE INSULATED AND SHEATHED  
MEDIUM VOLTAGE POWER CABLES

- 1 • Flexible tin-plated copper core – class 5 as per IEC 60228.
- 2 • Facultative separating tape.
- 3 • Insulation: Silicone rubber.
- 4 • Sheath: Silicone rubber.

**Characteristics****General**

- Continuous operating temperatures: -60 °C to +180 °C.
- Good resistance to usual chemical atmospheres.

**Electrical**

- Rated voltage: 1.1 kV.
- Test voltage: 3.5 kV.

**Standard products**

- Standard insulation colour: white.
- Standard sheath colour: yellow.
- Standard marking: OMERIN 369 - AWM I A/B 180C 1000V FT2 SILICOUL DI 180C 1100V 3661 AWM - {cross-section/mm²}

**SILICOUL® DI Style 3661 - 1.1 kV****Flexible core • class 5 as per IEC 60228**

Nominal cross-section (mm²)	Nominal stranding	Maximum linear resistance at 20 °C (Ω/km)
1.5	7 x 0.52*	12.2
2.5	19 x 0.40*	2.56
4	32 x 0.40*	4.70
6	48 x 0.40*	3.11
10	80 x 0.40	1.95
16	126 x 0.40	1.24
25	196 x 0.40	0.795
35	276 x 0.40	0.565
50	396 x 0.40	0.393
70	360 x 0.50	0.277
95	485 x 0.50	0.210
120	608 x 0.50	0.164
150	756 x 0.50	0.132
185	944 x 0.50	0.108
240	1221 x 0.50	0.0817
300	1525 x 0.50	0.0654

**INSULATED WIRE OR CABLE**

Nominal diameter (mm)	Approximate linear weight (kg/km)
3.6	23
4.0	33
4.9	52
5.7	74
6.9	115
8.2	169
10.0	262
11.2	347
13.2	500
15.5	688
17.6	895
19.5	1 137
22.0	1 425
23.8	1 757
26.7	2 302
29.6	2 883

\* Tin-plated copper core – class 2 as per IEC 60228.

For this product, please contact:

OMERIN division principale

Zone Industrielle - F 63600 Ambert

Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10

omerin@omerin.com

[www.omerin.com](http://www.omerin.com)**omerin**  
LES CABLES DE L'EXTREME

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.

For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

© Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.