

HIGH TEMPERATURE WIRES AND CABLES
FOR THE GENERAL MARKET
SECTION I: CROSS LINKED ELASTOMERS

SILICABLE®
SIF/SIR/SIE
N2GFAF/N2GFA
VDE approval
-60 °C to +180 °C



Approvals - standards

- SIF, SIR and SIE: VDE approved as per licence no. 121112.
- N2GFAF AND N2GFA: VDE approved as per licence no. 101969.
- Halogen-free: IEC 60754-1 / EN 60754-1.


Applications

- Cabling for household electrical heating appliances.
 - Rotating machines (class H).
 - Lighting.
- Industrial cabling in hot atmospheres.

Options

- Nickel-plated copper core: contact us.
- Insulation: Very high temperature silicone rubber (+230 °C in continuous operation) - ref. SIF-THT.
 - Insulation: Silicone rubber with high mechanical properties - ref. SIF-HRD.
 - Other nominal stranding: contact us.

SILICONE INSULATED AND/OR SHEATHED
WIRES AND CABLES

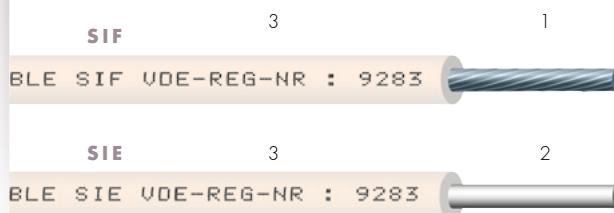

- 1 • Flexible bare copper or tin-plated core - class 5 as per IEC 60228 / DIN VDE 0295.
- 2 • Solid bare copper or tin-plated core - class 1 as per IEC 60228 / DIN VDE 0295.
- 3 • Insulation: Silicone rubber - type EI2 - DIN EN 50363-1.

Characteristics

General

- Continuous operating temperatures: -60 °C to +180 °C.
- Good resistance to thermal shock and UV.

Electrical

- Rated voltage: 300/300 V.
- Test voltage: 2000 V.

Standard products

- All colours including two-coloured.

SIF

Flexible core • class 5 as per IEC 60228

Nominal cross-section (mm ²)	Nominal stranding Class 5	Max. linear resistance at 20 °C (Ω/km) (tin-plated copper core)	INSULATED WIRE		
			Nominal thickness of insulation (mm)	Nominal diameter (mm)	Approximate linear weight (kg/km)
0.25 *	14 x 0.15	82.2	0.6	1.9	5.9
0.5	16 x 0.20	40.1	0.6	2.1	8.6
0.75 (1)	24 x 0.20	26.7	0.6	2.4	12.0
1	32 x 0.20	20.0	0.6	2.5	14.3
1.5	30 x 0.25	13.7	0.7	2.8	19.4
2.5	50 x 0.25	8.21	0.8	3.4	30.6

SIR

Stranded core • class 2 as per IEC 60228

	Class 2		Alternative	Max. linear resistance at 20 °C (Ω/km)	Nominal thickness of insulation (mm)	Nominal diameter (mm)	Approximate linear weight (kg/km)
	Class 2	Alternative					
0.5	7 x 0.30	-	36.7	0.6	2.1	8.6	
0.75	7 x 0.37	11 x 0.30	24.8	0.6	2.4	12.0	
1	7 x 0.43	14 x 0.30	18.2	0.6	2.5	14.4	
1.5	7 x 0.52	21 x 0.30	12.2	0.7	3.0	21.0	
2.5	7 x 0.67	35 x 0.30	7.56	0.8	3.6	32.5	

SIE

Solid core • class 1 as per IEC 60228

Nominal cross-section (mm ²)	Nominal diameter (mm)	Max. linear resistance at 20 °C (Ω/km)	Nominal thickness of insulation (mm)	Nominal diameter (mm)	Approximate linear weight (kg/km)
0.25 *	1 x 0.52	76.0	0.6	1.8	5.3
0.5	1 x 0.80	36.7	0.6	2.0	8.4
0.75 (2)	1 x 0.98	24.8	0.6	2.3	11.8
1	1 x 1.13	18.2	0.6	2.5	14.8
1.5	1 x 1.38	12.2	0.7	2.8	20.3
2.5	1 x 1.77	7.56	0.8	3.4	31.9

* Nominal cross-section not included in IEC 60228.

(1) Standardised VDE ref.: N2GFAF

(2) Standardised VDE ref.: N2GFA

For this product, please contact:

OMERIN division principale

Zone Industrielle - F 63600 Ambert

Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10

omerin@omerin.com

OMERIN division silisol

BP 87 - ZI du Devev - F 42000 Saint-Etienne

Tel. +33 (0)4 77 81 36 00 - Fax +33 (0)4 77 81 37 00

silisol@omerin.com

omerin
LES CABLES DE L'EXTREME

www.omerin.com

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.

For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

® Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.