

CABLE SOLUTIONS
FOR AUTOMOTIVE AND E-MOBILITY

HIGH VOLTAGE CABLES

SILICABLE® FHLR2GCB2G LV216

Shielded multicore


-40°C to +180°C

Class E according to ISO 6722-1

LV 216-2 table A.5

+180°C (3000 h)

+205°C (240 h)

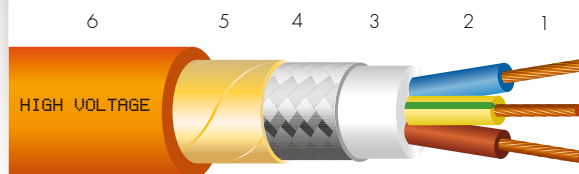

- 1 • Flexible bare copper core according to ISO 6722-1, LV 216-2 et EN 13602
- 2 • Silicone insulation
- 3 • Silicone internal sheath
- 4 • Tinned copper braid
- 5 • Aluminium / PET tape
- 6 • External silicone sheath

Approvals - standards*

- LV 216-2 table A.5, ISO 6722-1, EN 13602
- IEC 60754-1 halogen free

Applications

- Multicore silicone power cable for use in hybrid and electrical vehicles.

Specific characteristics

- High Voltage requirements according to LV 216-2
- Voltage rating: 600 VAC / 1000 VDC
- Test voltage: 5 kV 5 minutes
- Sparktest: 8 kV
- Excellent flexibility
- Flame retardant
- Bending radius: 3 x D

Colour code

- Sheath: orange
- Insulation:
 - 2 cores: red, black
 - ≥ 3 cores: LV216-2 (others on request)

CONSTRUCTION ACCORDING TO LV 216-2 TABLE A.5

Item code	Number of conductors	Nominal cross section (mm²)	Conductor diameter max. (mm)	Single core diameter		Under screen diameter max. (mm)	Strand diameter screen max. (mm)	Sheath thickness min. (mm)	Cable outside diameter	
				min. (mm)	max. (mm)				min. (mm)	max. (mm)
G2505001	2	1.5	1.7	2.2	2.4	5.8	0.16	0.76	7.9	8.5
G2505002	3	1.5	1.7	2.2	2.4	6.2	0.16	0.76	8.5	9.1
G2505003	4	1.5	1.7	2.2	2.4	6.8	0.16	0.76	9.1	9.7
G2505004	5	1.5	1.7	2.2	2.4	7.4	0.16	0.76	9.7	10.3
G2505005	2	2.5	2.2	2.7	3.0	6.9	0.16	0.76	9.3	9.9
G2505006	3	2.5	2.2	2.7	3.0	7.4	0.16	0.76	9.8	10.4
G2505007	4	2.5	2.2	2.7	3.0	8.1	0.16	0.76	10.5	11.1
G2505008	5	2.5	2.2	2.7	3.0	8.9	0.16	0.76	11.5	12.1
G2505009	2	4	2.8	3.4	3.7	8.3	0.16	0.76	10.7	11.3
G2505010	3	4	2.8	3.4	3.7	8.9	0.16	0.76	11.5	12.1
G2505011	4	4	2.8	3.4	3.7	9.8	0.21	0.82	12.7	13.3
G2505012	5	4	2.8	3.4	3.7	11	0.21	0.9	13.9	14.5
G2505013	2	6	3.4	4.0	4.3	9.7	0.16	0.82	12.2	12.8
G2505014	3	6	3.4	4.0	4.3	10.5	0.21	0.9	13.5	14.1
G2505015	4	6	3.4	4.0	4.3	11.4	0.21	0.9	14.5	15.1
G2505016	5	6	3.4	4.0	4.3	12.6	0.21	0.9	15.7	16.3

* Standards: our products comply with all or part of the requirements of standards quoted: contact us
Other cross-sections available on request

www.omerin.com