


SILICABLE® MV-CS

-60 °C to +200 °C

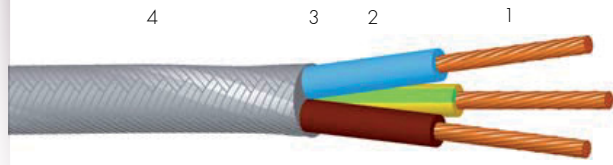

- 1 • Flexible bare copper core - class 5 as per IEC 60228.
- 2 • Silicone rubber.
- 3 • Fillers optional, not shown.
- 4 • Silicone-coated fibreglass braid.

Approvals - standards

- Halogen-free: IEC 60754-1 / EN 50267-2-1.
 - Low corrosivity of gas emissions: IEC 60754-2 / EN 50267-2-2.
 - Fire retardant: NF C 32-070 test C1.
- Resistance to vertical flame propagation for an insulated cable: IEC 60332-1-2 / EN 50265-2-1 / NF C 32-070 test C2.

Applications

- All cabling in hot atmospheres up to 200 °C.
 - Cabling in the metallurgical industry, glassworks, etc.
 - Cabling for furnaces, ovens, machines for thermoplastics and rubber, welding stations, etc. Lights, spotlights, etc.

Options

- Other nominal cross-sections: contact us.
- Other numbers of conductors (up to 37): contact us.
 - Tin-plated copper cores: ref. MV-ECS.
- Nickel-plated copper cores: ref. MV-CNCS.
 - Outer flexible armour:
 - > Galvanised steel braid: ref. BGMV-CS.
 - > Stainless steel braid: ref. BIMV-CS.
 - Reinforced outer braid: ref. MACS.
 - Electrical shielding:
 - > Tin-plated copper braid: ref. MVBE-ECS.
- > Aluminium tape + continuity wire: ref. MVBAL-ECS.
 - Other options and/or combinations of the options outlined above: contact us.

Characteristics

General

- Continuous operating temperatures: -60 °C to +200 °C.
- Good resistance to thermal shock.
- Excellent ageing.

Electrical

- Rated voltage: up to 600/1000 V.
- Test voltage: up to 3000 V.

Standard products

- Standard conductor colours: see table below.
- Standard outer braid colour: grey.
- Some cables may include a fibreglass tape or other separating tape under the outer braid.

Standard conductor colours

| Number of conductors | Standard conductor colours | |
|----------------------|---|-------------------------------------|
| | With an earth wire | Without an earth wire |
| 2 | - | Blue - Brown |
| 3 | Yellow/Green - Blue - Brown | Brown - Black - Grey (or Blue) |
| 4 | Yellow/Green - Brown - Black - Grey (or Blue) | Blue - Brown - Black - Grey |
| 5 | Yellow/Green - Blue - Brown - Black - Grey | Blue - Brown - Black - Grey - Black |
| ≥6 | Yellow/Green - Grey numbered | Grey numbered |

Identification

Multi-conductor cables without an earth wire are identified as follows:

< Number of conductors > X < Cross-section > mm² (example: 3 X 1.5 mm²).

Multi-conductor cables with an earth wire are identified by the symbol G in the place of the X (example 3 G 1.5 mm²).

For this product, please contact:

OMERIN division principale

Zone Industrielle - F 63600 Ambert
Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10
omerin@omerin.com

OMERIN division silisol

BP 87 - ZI du Devey - F 42000 Saint-Étienne
Tel. +33 (0)4 77 81 36 00 - Fax +33 (0)4 77 81 37 00
silisol@omerin.com

www.omerin.com



The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.
For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.
© Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.

Flexible core – Class 5 as per IEC 60228

INSULATED CONDUCTORS

SHEATHED CABLE

| Nominal cross-section (mm ²) | Nominal stranding | Maximum linear resistance at 20 °C (Ω/km) | Nominal thickness of insulation (mm) | Nominal diameter of the conductor (mm) | Nominal diameter of the cable (mm) | Approximate linear weight (kg/km) |
|--|-------------------|---|--------------------------------------|--|------------------------------------|-----------------------------------|
| 2 x 0.5 | 16 x 0.20 | 39.0 | 0.6 | 2.1 | 4.7 | 22.1 |
| 3 x 0.5 | 16 x 0.20 | 39.0 | 0.6 | 2.1 | 5.0 | 31.7 |
| 4 x 0.5 | 16 x 0.20 | 39.0 | 0.6 | 2.1 | 5.6 | 40.1 |
| 5 x 0.5 | 16 x 0.20 | 39.0 | 0.6 | 2.1 | 6.2 | 51.2 |
| 7 x 0.5 | 16 x 0.20 | 39.0 | 0.6 | 2.1 | 6.8 | 71.7 |
| 2 x 0.75 | 24 x 0.20 | 26.0 | 0.6 | 2.4 | 5.2 | 36.9 |
| 3 x 0.75 | 24 x 0.20 | 26.0 | 0.6 | 2.4 | 5.8 | 51.6 |
| 4 x 0.75 | 24 x 0.20 | 26.0 | 0.6 | 2.4 | 6.4 | 68.8 |
| 5 x 0.75 | 24 x 0.20 | 26.0 | 0.6 | 2.4 | 7.1 | 86.0 |
| 7 x 0.75 | 24 x 0.20 | 26.0 | 0.6 | 2.4 | 7.8 | 91.6 |
| 2 x 1 | 32 x 0.20 | 19.5 | 0.6 | 2.5 | 5.5 | 33.3 |
| 3 x 1 | 32 x 0.20 | 19.5 | 0.6 | 2.5 | 6.0 | 48.7 |
| 4 x 1 | 32 x 0.20 | 19.5 | 0.6 | 2.5 | 6.6 | 51.6 |
| 5 x 1 | 32 x 0.20 | 19.5 | 0.6 | 2.5 | 7.4 | 64.4 |
| 7 x 1 | 32 x 0.20 | 19.5 | 0.6 | 2.5 | 8.2 | 106.9 |
| 12 x 1 | 32 x 0.20 | 19.5 | 0.6 | 2.5 | 11.0 | 187 |
| 19 x 1 | 32 x 0.20 | 19.5 | 0.6 | 2.5 | 13.2 | 296 |
| 24 x 1 | 32 x 0.20 | 19.5 | 0.6 | 2.5 | 15.8 | 374 |
| 27 x 1 | 32 x 0.20 | 19.5 | 0.6 | 2.5 | 16.2 | 421 |
| 37 x 1 | 32 x 0.20 | 19.5 | 0.6 | 2.5 | 18.2 | 578 |
| 2 x 1.5 | 30 x 0.25 | 13.3 | 0.6 | 2.8 | 6.2 | 55.8 |
| 3 x 1.5 | 30 x 0.25 | 13.3 | 0.6 | 2.8 | 6.6 | 64.4 |
| 4 x 1.5 | 30 x 0.25 | 13.3 | 0.6 | 2.8 | 7.3 | 84.3 |
| 5 x 1.5 | 30 x 0.25 | 13.3 | 0.6 | 2.8 | 8.2 | 105 |
| 7 x 1.5 | 30 x 0.25 | 13.3 | 0.6 | 2.8 | 9.0 | 142 |
| 12 x 1.5 | 30 x 0.25 | 13.3 | 0.6 | 2.8 | 12.2 | 241 |
| 19 x 1.5 | 30 x 0.25 | 13.3 | 0.6 | 2.8 | 14.6 | 369 |
| 24 x 1.5 | 30 x 0.25 | 13.3 | 0.6 | 2.8 | 17.5 | 466 |
| 27 x 1.5 | 30 x 0.25 | 13.3 | 0.6 | 2.8 | 18.0 | 525 |
| 37 x 1.5 | 30 x 0.25 | 13.3 | 0.6 | 2.8 | 20.4 | 719 |
| 2 x 2.5 | 50 x 0.25 | 7.98 | 0.7 | 3.4 | 7.3 | 79.6 |
| 3 x 2.5 | 50 x 0.25 | 7.98 | 0.7 | 3.4 | 7.8 | 109.7 |
| 4 x 2.5 | 50 x 0.25 | 7.98 | 0.7 | 3.4 | 8.8 | 129 |
| 5 x 2.5 | 50 x 0.25 | 7.98 | 0.7 | 3.4 | 9.7 | 161 |
| 7 x 2.5 | 50 x 0.25 | 7.98 | 0.7 | 3.4 | 10.8 | 225 |
| 12 x 2.5 | 50 x 0.25 | 7.98 | 0.7 | 3.4 | 14.8 | 385 |
| 2 x 4 | 56 x 0.30 | 4.95 | 0.8 | 4.2 | 8.9 | 115 |
| 3 x 4 | 56 x 0.30 | 4.95 | 0.8 | 4.2 | 9.5 | 165 |
| 4 x 4 | 56 x 0.30 | 4.95 | 0.8 | 4.2 | 10.6 | 205 |
| 5 x 4 | 56 x 0.30 | 4.95 | 0.8 | 4.2 | 11.9 | 248 |
| 7 x 4 | 56 x 0.30 | 4.95 | 0.8 | 4.2 | 13.1 | 360 |
| 2 x 6 | 84 x 0.30 | 3.30 | 0.8 | 4.8 | 10.2 | 151 |
| 3 x 6 | 84 x 0.30 | 3.30 | 0.8 | 4.8 | 11.0 | 227 |
| 4 x 6 | 84 x 0.30 | 3.30 | 0.8 | 4.8 | 12.2 | 303 |
| 5 x 6 | 84 x 0.30 | 3.30 | 0.8 | 4.8 | 13.8 | 364 |
| 2 x 10 | 80 x 0.40 | 1.91 | 1.0 | 6.4 | 13.5 | 272 |
| 3 x 10 | 80 x 0.40 | 1.91 | 1.0 | 6.4 | 14.5 | 408 |
| 4 x 10 | 80 x 0.40 | 1.91 | 1.0 | 6.4 | 16.1 | 544 |
| 5 x 10 | 80 x 0.40 | 1.91 | 1.0 | 6.4 | 18.0 | 680 |
| 2 x 16 | 126 x 0.40 | 1.21 | 1.2 | 7.8 | 15.5 | 401 |
| 3 x 16 | 126 x 0.40 | 1.21 | 1.2 | 7.8 | 15.6 | 602 |
| 4 x 16 | 126 x 0.40 | 1.21 | 1.2 | 7.8 | 18.6 | 803 |
| 5 x 16 | 126 x 0.40 | 1.21 | 1.2 | 7.8 | 20.8 | 1003 |
| 2 x 25 | 196 x 0.40 | 0.780 | 1.4 | 9.6 | 19.9 | 627 |
| 3 x 25 | 196 x 0.40 | 0.780 | 1.4 | 9.6 | 21.3 | 941 |
| 4 x 25 | 196 x 0.40 | 0.780 | 1.4 | 9.6 | 23.9 | 1254 |
| 5 x 25 | 196 x 0.40 | 0.780 | 1.4 | 9.6 | 26.7 | 1568 |