

SILIFLAM® THS 1200

Approvals - standards

- Nickel-plated copper complying with the 2% or 27% class as per standard ASTM B355.

Applications

- See range presentation sheet (FT 3301).
The THS 1200 series is recommended for zones subject to very high temperature peaks (flames, falling slag, etc.) and high continuous operating temperatures.

Options

- Other nominal cross-sections: contact us.
- Pure nickel core, ref. SILIFLAM THS 1201: contact us.
- Other numbers of conductors: contact us.
 - Other options or cables based on the THS 1200 series, designed on request: contact us.

Characteristics

General

- Continuous operating temperatures: See general presentation sheet (FT 3301).
- Good resistance to thermal shocks and ageing.

Electrical

- Rated voltage: 300/500 V to 600/1000V.
- Test voltage: THS 1200 series: 1500 V.
THS 1230 and 1250 series: 2500V.

Standard products

- See also: Range presentation sheet (FT 3301).
- Ref. THS 1200 U: Unipolar - THS 1200 type insulation.
- Ref. THS 1200 M: Multi-conductor - THS 1200 type insulation and sheathing.
- Ref. THS 1230 U/M: THS 1200 insulation / sheathing with PTFE reinforcement.
- Ref. THS 1250 U/M: THS 1200 insulation / sheathing with polyimide reinforcement.
- Ref. THS 1200 U/M - BCN: Nickel-plated copper electrical screen.
- Ref. THS 1200 U/M - BI: Stainless steel flexible armour.

For this product, please contact:

OMERIN division principale

Zone Industrielle - F 63600 Ambert
Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10
omerin@omerin.com


OMERIN division silisol

BP 87 - ZI du Devey - F 42000 Saint-Étienne
Tel. +33 (0)4 77 81 36 00 - Fax +33 (0)4 77 81 37 00
silisol@omerin.com


omerin
LES CABLES DE L'EXTREME

www.omerin.com

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.
For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.
® Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.



THS 1200 U

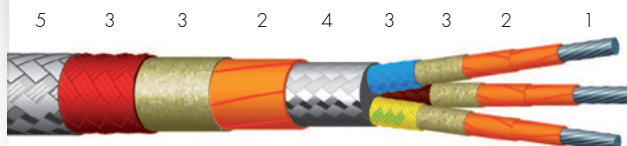

THS 1200 M

- 2% or 27% nickel-plated copper core as per ASTM B355.
- (Optional) 2 heat-sealed PTFE (THS 1230) or polyimide (THS 1250) tapes.
- THS 1200 type composite insulation and sheathing: mica and coated mineral fibre.
- (Optional) Nickel-plated copper electrical screen braid.
- (Optional) AISI 304 stainless steel outer shielding.

Conducting core

INSULATED CONDUCTORS

SHEATHED CABLE

Nominal cross-section (mm ²)	Nominal stranding	Maximum linear resistance at 20 °C (Ω/km)	Approximate diameter ⁽¹⁾ of single conductors (THS 1200 M version) (mm)	Approximate diameter ⁽¹⁾ of cable (THS 1200 U and 1200 M version) (mm)
THS 1200 U				
1 x 0.5	7 x 0.30	40.1	-	2.2
1 x 0.75	11 x 0.30	26.7	-	2.6
1 x 1	14 x 0.30	20.0	-	3.0
1 x 1.5	21 x 0.30	13.7	-	3.2
1 x 2.5	35 x 0.30	8.21	-	3.6
1 x 4	56 x 0.30	5.09	-	4.3
1 x 6	84 x 0.30	3.39	-	5.2
1 x 10	80 x 0.40	1.95	-	8.0
1 x 16	126 x 0.40	1.24	-	8.6
1 x 25	196 x 0.40	0.795	-	9.9
1 x 35	276 x 0.40	0.565	-	11.0
1 x 50	396 x 0.40	0.393	-	13.2
1 x 70	543 x 0.40	0.277	-	16.1
1 x 95	740 x 0.40	0.210	-	18.1
1 x 120	925 x 0.40	0.164	-	20.2
1 x 150	1184 x 0.40	0.132	-	21.6
THS 1200 M				
2 x 0.5	7 x 0.30	40.1	2.2	6.1
3 x 0.5	7 x 0.30	40.1	2.2	6.4
4 x 0.5	7 x 0.30	40.1	2.2	6.9
5 x 0.5	7 x 0.30	40.1	2.2	7.7
7 x 0.5	7 x 0.30	40.1	2.2	8.3
2 x 0.75	11 x 0.30	26.7	2.6	6.8
3 x 0.75	11 x 0.30	26.7	2.6	7.3
4 x 0.75	11 x 0.30	26.7	2.6	8.1
5 x 0.75	11 x 0.30	26.7	2.6	8.7
7 x 0.75	11 x 0.30	26.7	2.6	9.4
2 x 1	14 x 0.30	20.0	3.0	7.6
3 x 1	14 x 0.30	20.0	3.0	8.1
4 x 1	14 x 0.30	20.0	3.0	8.9
5 x 1	14 x 0.30	20.0	3.0	9.8
7 x 1	14 x 0.30	20.0	3.0	10.6
12 x 1	14 x 0.30	20.0	3.0	14.0
2 x 1.5	21 x 0.30	13.7	3.2	8.0
3 x 1.5	21 x 0.30	13.7	3.2	8.5
4 x 1.5	21 x 0.30	13.7	3.2	9.0
5 x 1.5	21 x 0.30	13.7	3.2	10.0
7 x 1.5	21 x 0.30	13.7	3.2	11.2
12 x 1.5	21 x 0.30	13.7	3.2	15.0
19 x 1.5	21 x 0.30	13.7	3.2	17.5
27 x 1.5	21 x 0.30	13.7	3.2	21.8
37 x 1.5	21 x 0.30	13.7	3.2	24.2
2 x 2.5	35 x 0.30	8.21	3.6	8.8
3 x 2.5	35 x 0.30	8.21	3.6	9.2
4 x 2.5	35 x 0.30	8.21	3.6	10.3
5 x 2.5	35 x 0.30	8.21	3.6	11.4
7 x 2.5	35 x 0.30	8.21	3.6	12.4
2 x 4	56 x 0.30	5.09	4.3	10.2
3 x 4	56 x 0.30	5.09	4.3	10.9
4 x 4	56 x 0.30	5.09	4.3	11.6
5 x 4	56 x 0.30	5.09	4.3	13.4
7 x 4	56 x 0.30	5.09	4.3	14.6
2 x 6	84 x 0.30	3.39	5.2	12.1
3 x 6	84 x 0.30	3.39	5.2	12.9
4 x 6	84 x 0.30	3.39	5.2	14.3
5 x 6	84 x 0.30	3.39	5.2	15.8
3 x 10	80 x 0.40	1.95	8.0	18.8
4 x 10	80 x 0.40	1.95	8.0	20.9
5 x 10	80 x 0.40	1.95	8.0	23.4
3 x 16	126 x 0.40	1.24	9.0	21.1
4 x 16	126 x 0.40	1.24	9.0	23.4
5 x 16	126 x 0.40	1.24	9.0	26.1
3 x 25	196 x 0.40	0.795	10.6	24.5
4 x 25	196 x 0.40	0.795	10.6	27.3
5 x 25	196 x 0.40	0.795	10.6	30.4
3 x 35	276 x 0.40	0.565	13.0	29.6
4 x 35	276 x 0.40	0.565	13.0	33.0
5 x 35	276 x 0.40	0.565	13.0	36.9
3 x 50	396 x 0.40	0.393	14.4	32.6
4 x 50	396 x 0.40	0.393	14.4	36.5
5 x 50	396 x 0.40	0.393	14.4	40.7

[1] the diameters stated are approximate. They can vary substantially (± 2 mm or ± 20%) according to the series or options in question (THS 1230, THS 1250, BCN, BI option, etc.) and do not apply to derivative products designed on request, which are the subject of a specific technical data sheet.