


VARPREN® RW

EN 50264-3-1 600V M

Unsheathed cable

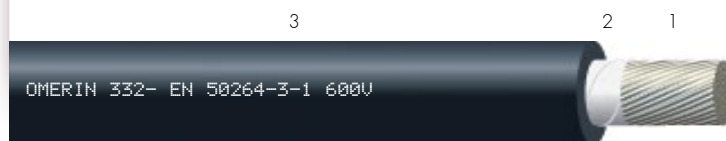

- 1 • Tin-plated copper core - class 5 - EN 60228.
- 2 • Separating tape (optional).
- 3 • Fire resistant elastomer - type EI 109 as per EN 50264-3-1.

Characteristics

Thermal

Continuous operating temperature:
-40 °C to +90 °C.

Electrical

Operating voltage: 0.6 / 1 kV.
Test voltage: 3.5 kV A.C.

Mechanical

Cut-through resistance: ★★★★★
Resistance to abrasion: ★★★★★
Minimum static internal bending radius:
as per EN 50355 (Table 16)
and EN 50343 (Table 4)

Chemical

Acid and base resistance: ★★★★★
Mineral oil resistance: ★★★★★
Fuel resistance only for class M: ★★★★★

Fire-smoke

Halogen-free (EN 60754-1).
Low toxicity (EN 60754-2).
Low smoke (EN 61034-2).
Flame retardant (EN 60332-1-2, EN 60332-3-24).
Fire-smoke protection (EN 45545-2, NFPA 130).

Options

Other cross-sections on request.

Standards and approvals

- EN 60228, EN 50264-1, EN 50264-3-1.
- EN 60754-1, EN 60754-2.
- EN 60332-1-2, EN 60332-3-24, EN 61034-2.

Marking

OMERIN 332- EN 50264-3-1 600V < cross-section > M - batch number - week/year

Item code	Nominal cross-section (mm ²)	Nominal stranding	Nominal wall thickness (mm)	Cable outer diameter (mm)		Maximum linear resistance at 20 °C (Ω/km)	Approx. linear weight (kg/km)
				Mini	Maxi		
374I0302	1	32 x 0.20	0.6	2.4	2.8	20	15
374I0402	1.5	30 x 0.25	0.7	2.8	3.3	13.7	22
374I0202	2.5	50 x 0.25	0.7	3.2	3.8	8.21	33
374I0502	4	56 x 0.30	0.7	3.8	4.4	5.09	46
374I0602	6	84 x 0.30	0.7	4.2	5.0	3.39	67
374I0102	10	80 x 0.40	0.7	5.1	5.9	1.95	106
374I0702	16	126 x 0.40	0.7	6.1	7.2	1.24	165
374I0802	25	196 x 0.40	0.9	7.8	9.1	0.795	258
374I0902	35	276 x 0.40	0.9	9.0	10.6	0.565	353
374I1002	50	396 x 0.40	1.0	10.6	12.4	0.393	499
374I1102	70	360 x 0.50	1.1	12.5	14.6	0.277	695
374I1202	95	485 x 0.50	1.1	13.9	16.3	0.210	927
374I1302	120	608 x 0.50	1.2	15.7	18.4	0.164	1146
374I1402	150	756 x 0.50	1.4	17.6	20.6	0.132	1470
374I1502	185	944 x 0.50	1.6	19.6	22.9	0.108	1766
374I1602	240	1221 x 0.50	1.7	22.2	26.0	0.0817	2330
374I1702	300	1525 x 0.50	1.8	24.6	28.8	0.0654	2909

For this product, please contact :

OMERIN division principale

Zone Industrielle - F 63600 Ambert
Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10
omerin@omerin.com

OMERIN division silisol

BP 87 - ZI du Devey - F 42000 Saint-Etienne
Tel. +33 (0)4 77 81 36 00 - Fax +33 (0)4 77 81 37 00
silisol@omerin.com

www.omerin.com

omerin
LES CABLES DE L'EXTREME

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force. For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.
© Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.