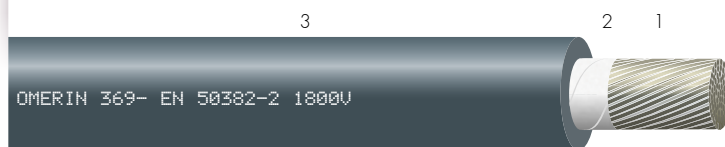


SILICABLE® RW

EN 50382-2 1800V F 150 °C

Unsheathed cable

HIGH TEMPERATURE POWERCABLES
EN 50382-2

- 1 • Flexible stranded tin-plated copper - class 5 - EN 60228.
- 2 • Separating tape (optional).
- 3 • Silicone rubber with high mechanical properties - type EI 111 as per EN 50382-1.

Characteristics

Thermal

Continuous operating temperature:
-40 °C to +150 °C.

Electrical

Operating voltage: 1.8 / 3 kV.
Test voltage: 6.5 kV A.C.

Mechanical

Resistance to alternate bending: ★★★★★
Resistance to abrasion: ★★★★★
Minimum static internal bending radius
(EN 50355): 3xD.

Chemical

Acid and base resistance: ★★★★★
Mineral oil resistance: ★★★★★

Fire-smoke

Halogen-free (EN 60754-1).
Low toxicity (EN 60754-2).
Low smoke (EN 61034-2).
Flame retardant (EN 60332-1-2, EN 60332-3-24).
Fire-smoke protection (EN 45545-2).

Options

Cable with synthetic reinforcing braid.

Ref: SILICABLE® RW EN 50382-2 1800V FZ 150 °C.
Flexible red copper core - class 5 - EN 60228.

Standards and approvals

- EN 60228, EN 50382-1, EN 50382-2.
- EN 60754-1, EN 60754-2.
- EN 60332-1-2, EN 60332-3-24, EN 61034-2.

Marking

OMERIN 369- EN 50382-2 1800V 1x < cross-section > F 150 °C - batch number - week/year

Item code	Nominal cross-section (mm ²)	Nominal stranding	Nominal wall thickness (mm)	Cable outer diameter (mm)		Maximum linear resistance at 20 °C (Ω/km)	Approx. linear weight (kg/km)
				Mini	Maxi		
A0822005	1.5	30 x 0.25	2.5	6.3	7.3	13.3	60
A0822006	2.5	50 x 0.25	2.5	6.7	7.8	7.98	70
A0822023	4	56 x 0.30	2.5	7.2	8.4	4.95	90
A0822007	6	84 x 0.30	2.5	7.7	9	3.30	115
A0822010	10	80 x 0.40	2.5	8.5	10	1.91	160
A0822011	16	126 x 0.40	2.5	9.6	11.2	1.21	230
A0822012	25	196 x 0.40	2.5	10.9	12.7	0.78	320
A0822013	35	276 x 0.40	2.5	12.1	14.1	0.554	420
A0822014	50	396 x 0.40	2.5	13.5	15.8	0.386	570
A0822015	70	360 x 0.50	2.5	15.2	17.8	0.272	770
A0822016	95	485 x 0.50	2.7	17	19.9	0.206	1030
A0822017	120	608 x 0.50	2.7	18.6	21.7	0.161	1270
A0822018	150	756 x 0.50	2.7	20.1	23.5	0.129	1560
A0822019	185	944 x 0.50	2.7	21.7	25.4	0.106	1900
A0822020	240	1221 x 0.50	2.7	24.1	28.2	0.0801	2410
A0822021	300	1525 x 0.50	2.7	26.4	30.9	0.0641	2970
A0822022	400	2037 x 0.50	2.9	29.9	34.9	0.0486	3900

If textile braid, maximal diameter should be increased by 0.8 mm.

For this product, please contact :

OMERIN division principale

Zone Industrielle - F 63600 Ambert

Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10

omerin@omerin.com

OMERIN division silisol

BP 87 - ZI du Devey - F 42000 Saint-Etienne

Tel. +33 (0)4 77 81 36 00 - Fax +33 (0)4 77 81 37 00

silisol@omerin.com

www.omerin.com

omerin
LES CABLES DE L'EXTREME

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.
For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.
® Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.