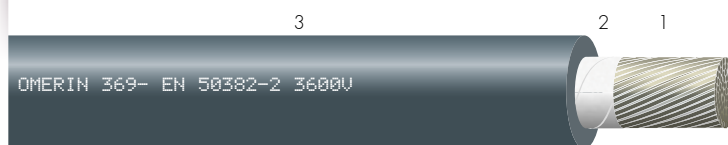


# SILICABLE® RW

## EN 50382-2 3600V F 150 °C

### Unsheathed cable

HIGH TEMPERATURE POWERCABLES  
EN 50382-2

- 1 • Flexible stranded tin-plated copper - class 5 - EN 60228.
- 2 • Separating tape (optional).
- 3 • Silicone rubber with high mechanical properties - type EI 111 as per EN 50382-1.

### Characteristics

#### Thermal

Continuous operating temperature:  
-40 °C to +150 °C.

#### Electrical

Operating voltage: 3.6 / 6 kV.  
Test voltage: 11 kV A.C.

#### Mechanical

Resistance to alternate bending: ★★★★★☆  
Resistance to abrasion: ★★★★★☆  
Minimum static internal bending radius  
(EN 50355): 3xD.

#### Chemical

Acid and base resistance: ★★★★★☆  
Mineral oil resistance: ★★★★★☆

#### Fire-smoke

Halogen-free (EN 60754-1).  
Low toxicity (EN 60754-2).  
Low smoke (EN 61034-2).  
Flame retardant (EN 60332-1-2, EN 60332-3-24).  
Fire-smoke protection (EN 45545-2).

### Options

Cable with synthetic reinforcing braid.

Ref: SILICABLE® RW EN 50382-2 3600V FZ 150 °C.  
Flexible red copper core - class 5 - EN 60228.

### Standards and approvals

- EN 60228, EN 50382-1, EN 50382-2.
- EN 60754-1, EN 60754-2.
- EN 60332-1-2, EN 60332-3-24, EN 61034-2

### Marking

OMERIN 369- EN 50382-2 3600V 1x < cross-section > F 150 °C - batch number - week/year

Item code	Nominal cross-section (mm²)	Nominal stranding	Nominal wall thickness (mm)	Cable outer diameter (mm)		Maximum linear resistance at 20 °C (Ω/km)	Approx. linear weight (kg/km)
				Mini	Maxi		
A0820007	2.5	50 x 0.25	3	7.6	8.9	7.98	80
A0820008	4	56 x 0.30	3	8.1	9.5	4.95	100
A0820009	6	84 x 0.30	3	9.0	10.6	3.30	130
A0820010	10	80 x 0.40	3	9.5	11.1	1.91	180
A0820022	16	126 x 0.40	3	10.5	12.3	1.21	250
A0820011	25	196 x 0.40	3	11.8	13.8	0.780	350
A0820012	35	276 x 0.40	3	13.0	15.2	0.554	450
A0820013	50	396 x 0.40	3	14.4	16.9	0.386	600
A0820005	70	360 x 0.50	3	16.1	18.9	0.272	800
A0820015	95	485 x 0.50	3	17.5	20.5	0.206	1050
A0820004	120	608 x 0.50	3.1	19.3	22.6	0.161	1300
A0820017	150	756 x 0.50	3.1	20.8	24.4	0.129	1550
A0820018	185	944 x 0.50	3.2	22.6	26.5	0.106	1950
A0820019	240	1221 x 0.50	3.4	25.4	29.8	0.0801	2500
A0820020	300	1525 x 0.50	3.4	27.7	32.4	0.0641	3050
A0820021	400	2037 x 0.50	3.4	30.8	36.0	0.0486	3950

If textile braid, maximal diameter should be increased by 0.8 mm.

For this product, please contact :

OMERIN division principale

Zone Industrielle - F 63600 Ambert  
Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10  
omerin@omerin.com

OMERIN division silisol

BP 87 - ZI du Devev - F 42000 Saint-Etienne  
Tel. +33 (0)4 77 81 36 00 - Fax +33 (0)4 77 81 37 00  
silisol@omerin.com

[www.omerin.com](http://www.omerin.com)

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.  
For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.  
© Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.