


ENERSYL® ZH CONTROL

Control cables

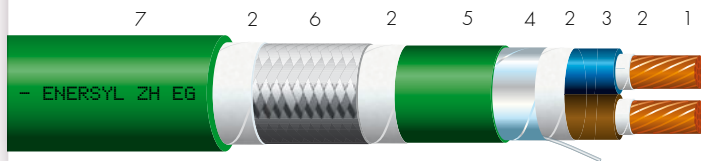

- 1 • Stranded bare copper core, class 2 as per IEC 60228.
- 2 • Optional separating tape.
- 3 • Insulation: cross-linked halogen-free polyolefine + optional filler(s).
- 4 • (optional) electrical screen: aluminium/PET tape + continuity wire (EG) / tin-plated copper braid (BE) / bare copper braid (BR).
- 5 • (optional) Internal sheath: HFFR, type ST8 as per IEC 60502-1.
- 6 • (optional) Armour: galvanized steel braid (BG) / double steel tape (FA).
- 7 • Outer sheath: HFFR, type ST8 as per IEC 60502-1.

Reference

- (example) ENERSYL® ZH EG BG CONTROL
19x1,5 mm²
ZH: halogen free
EG, BE, BR : type of electrical screen
BG, FA: type of armour
CONTROL: control cable
19: number of conductors
X, G: type of assembly: without (X)
or with (G) an earth wire
1,5 mm²: cross-section in mm²

Approvals - standards

- IEC 60228.
- IEC 60332-1 / IEC 60332-3.
- IEC 61034-2 / IEC 60754-1 / IEC 60754-2.

Markings

- OMERIN – ENERSYL < ZH xx xx CONTROL >
< cross-section > – 450/750V – < batch > – < year >

Standard products

- Sheath: green.
- Colour identification of conductors:
< up to 5 conductors: as per HD 308 S2.
> more than 5 conductors: white numbered.

Technical characteristics

Thermal

- Continuous operating temperature: -30 °C to +80 °C.
- Maximum core temperature: +90 °C.

Electrical

- Rated voltage: 450/750 V.
- Test voltage: 2500 V.

Smoke - fire

- Flame retardant – cable alone:
IEC 60332-1-2 / NF EN 60332-1-2 / NF C 32-070 test C2.
- Flame retardant – bunched cable:
IEC 60332-3-24 cat. C / NF EN 60332-3-24 cat. C.
- Low smoke density: IEC 61034-2 / NF EN 61034-2.
- Halogen-free: IEC 60754-1 / NF EN 60754-1.
- Low corrosivity of gas emissions: IEC 60754-2 / NF EN 60754-2.

Resistance of outer sheath to chemical attacks as per OMERIN test report NT140220-01:

- Good resistance to acid.
- Good resistance to base.
- Fairly good resistance to aliphatic hydrocarbons.
- Resistance to water: type AD7 as per IEC 60529 without immersion of ends.
- Resistance to UV ≥ 2000 hours as per EN 16472.

Options

- FLEX: flexible tin-plated copper core, class 5 as per IEC 60228.
- C1: Fire retardant cable as per NF C 32-070 test C1: contact us.
- Other colours: contact us.
- 105 °C cable: contact us.
- ATEX as per EN 60079-14.
Particularly suited for static facilities in potentially explosive environments with "i" intrinsic safety protection mode, requiring specific identification of cables.
Colour of the sheath: blue as per EN 60079-14 part 16.2.2.6.
> ENERSYL® ZH EX CONTROL: no electrical screen.
> ENERSYL® ZH BE EX CONTROL: with electrical screen.

For this product, please contact:

OMERIN division principale

Zone Industrielle - F 63600 Ambert
Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10
omerin@omerin.com

OMERIN division silisol

BP 87 - ZI du Devevy - F 42000 Saint-Étienne
Tel. +33 (0)4 77 81 36 00 - Fax +33 (0)4 77 81 37 00
silisol@omerin.com

omerin
LES CABLES DE L'EXTREME

www.omerin.com

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.
For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.
® Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.

				NON-SHIELDED CABLES			ARMoured CABLES			
Nominal cross-section (mm ²)	Nominal stranding	Nominal thickness of insulation (mm)	Nominal diameter of conductors (mm)	Nominal thickness of the sheath (mm)	Nominal outside diameter* (mm)	Approximate linear weight (kg/km)	Nominal thickness of the sheath (mm)	Nominal outside diameter* (mm)	Approximate linear weight (kg/km)	Max. linear resistance at 20° (Ω/km)
2 x 0.34	7 / 0.25	0.6	1.9	0.6	5.2	34	1.0	8.3	105	57.5
3 x 0.34	7 / 0.25	0.6	1.9	0.6	5.5	39	1.0	8.6	113	57.5
4 x 0.34	7 / 0.25	0.6	1.9	0.6	6.0	46	1.0	9.1	126	57.5
5 x 0.34	7 / 0.25	0.6	1.9	0.6	6.5	43	1.0	9.6	130	57.5
7 x 0.34	7 / 0.25	0.6	1.9	0.6	7.1	56	1.0	10.3	151	57.5
12 x 0.34	7 / 0.25	0.6	1.9	0.8	9.7	97	1.0	12.9	224	57.5
19 x 0.34	7 / 0.25	0.6	1.9	1.0	11.7	151	1.1	15.1	308	57.5
24 x 0.34	7 / 0.25	0.6	1.9	1.1	13.8	193	1.2	17.4	384	57.5
27 x 0.34	7 / 0.25	0.6	1.9	1.1	14.1	211	1.2	17.8	409	57.5
37 x 0.34	7 / 0.25	0.6	1.9	1.2	15.9	280	1.3	20.0	532	57.5
2 x 0.5	7 / 0.30	0.6	2.1	0.6	5.6	41	1.0	8.7	116	36.0
3 x 0.5	7 / 0.30	0.6	2.1	0.6	5.9	47	1.0	9.0	127	36.0
4 x 0.5	7 / 0.30	0.6	2.1	0.6	6.5	57	1.0	9.6	142	36.0
5 x 0.5	7 / 0.30	0.6	2.1	0.6	7.1	54	1.0	10.3	149	36.0
7 x 0.5	7 / 0.30	0.6	2.1	0.8	8.1	78	1.0	11.3	185	36.0
12 x 0.5	7 / 0.30	0.6	2.1	0.8	10.5	122	1.1	13.9	265	36.0
19 x 0.5	7 / 0.30	0.6	2.1	1.0	12.7	191	1.2	16.3	368	36.0
24 x 0.5	7 / 0.30	0.6	2.1	1.1	15.0	244	1.2	18.9	474	36.0
27 x 0.5	7 / 0.30	0.6	2.1	1.2	15.5	274	1.2	19.4	512	36.0
37 x 0.5	7 / 0.30	0.6	2.1	1.2	17.3	356	1.3	21.4	629	36.0
2 x 0.75	7 / 0.37	0.6	2.2	0.6	5.8	47	1.0	8.9	125	24.5
3 x 0.75	7 / 0.37	0.6	2.2	0.6	6.2	56	1.0	9.3	137	24.5
4 x 0.75	7 / 0.37	0.6	2.2	0.6	6.7	68	1.0	9.8	156	24.5
5 x 0.75	7 / 0.37	0.6	2.2	0.8	7.7	73	1.0	10.9	176	24.5
7 x 0.75	7 / 0.37	0.6	2.2	0.8	8.4	94	1.0	11.6	205	24.5
12 x 0.75	7 / 0.37	0.6	2.2	1.0	11.4	161	1.1	14.8	314	24.5
19 x 0.75	7 / 0.37	0.6	2.2	1.1	13.4	242	1.2	17.0	428	24.5
24 x 0.75	7 / 0.37	0.6	2.2	1.2	15.8	308	1.3	19.9	559	24.5
27 x 0.75	7 / 0.37	0.6	2.2	1.2	16.1	338	1.3	20.2	594	24.5
37 x 0.75	7 / 0.37	0.6	2.2	1.2	18.0	442	1.3	22.1	726	24.5
2 x 1	7 / 0.43	0.6	2.4	0.6	6.2	55	1.0	9.3	138	18.1
3 x 1	7 / 0.43	0.6	2.4	0.6	6.6	66	1.0	9.7	153	18.1
4 x 1	7 / 0.43	0.6	2.4	0.8	7.6	88	1.0	10.8	189	18.1
5 x 1	7 / 0.43	0.6	2.4	0.8	8.3	88	1.0	11.5	197	18.1
7 x 1	7 / 0.43	0.6	2.4	0.8	9.0	115	1.0	12.2	233	18.1
12 x 1	7 / 0.43	0.6	2.4	1.0	12.2	196	1.2	15.8	367	18.1
19 x 1	7 / 0.43	0.6	2.4	1.1	14.4	296	1.2	18.1	499	18.1
24 x 1	7 / 0.43	0.6	2.4	1.2	17.0	377	1.3	21.1	645	18.1
27 x 1	7 / 0.43	0.6	2.4	1.2	17.4	415	1.3	21.4	689	18.1
37 x 1	7 / 0.43	0.6	2.4	1.3	19.6	555	1.3	23.7	862	18.1
2 x 1.5	7 / 0.52	0.6	2.85	0.6	7.1	75	1.0	10.3	171	12.1
3 x 1.5	7 / 0.52	0.6	2.85	0.8	8.0	99	1.0	11.2	204	12.1
4 x 1.5	7 / 0.52	0.6	2.85	0.8	8.7	121	1.0	11.9	235	12.1
5 x 1.5	7 / 0.52	0.6	2.85	0.8	9.5	121	1.0	12.7	245	12.1
7 x 1.5	7 / 0.52	0.6	2.85	0.8	10.4	160	1.1	13.8	300	12.1
12 x 1.5	7 / 0.52	0.6	2.85	1.1	14.3	280	1.2	18.0	481	12.1
19 x 1.5	7 / 0.52	0.6	2.85	1.2	16.9	425	1.3	20.9	691	12.1
24 x 1.5	7 / 0.52	0.6	2.85	1.3	19.9	539	1.3	24.0	850	12.1
27 x 1.5	7 / 0.52	0.6	2.85	1.3	20.3	594	1.3	24.4	912	12.1
37 x 1.5	7 / 0.52	0.6	2.85	1.3	22.8	786	1.4	27.0	1152	12.1
2 x 2.5	7 / 0.67	0.6	3.2	0.8	8.2	109	1.0	11.4	217	7.41
3 x 2.5	7 / 0.67	0.6	3.2	0.8	8.7	134	1.0	11.9	249	7.41
4 x 2.5	7 / 0.67	0.6	3.2	0.8	9.5	167	1.0	12.7	291	7.41
5 x 2.5	7 / 0.67	0.6	3.2	0.8	10.4	172	1.1	13.8	313	7.41
7 x 2.5	7 / 0.67	0.6	3.2	1.0	11.8	241	1.1	15.2	399	7.41
12 x 2.5	7 / 0.67	0.6	3.2	1.2	15.9	408	1.3	20.0	661	7.41
19 x 2.5	7 / 0.67	0.6	3.2	1.2	18.6	613	1.3	22.7	906	7.41
24 x 2.5	7 / 0.67	0.6	3.2	1.3	22.0	777	1.4	26.3	1132	7.41
27 x 2.5	7 / 0.67	0.6	3.2	1.3	22.5	862	1.4	26.7	1224	7.41
37 x 2.5	7 / 0.67	0.6	3.2	1.4	25.4	1162	1.4	29.7	1568	7.41

* The rated outer diameter of cables may vary by +/- 1.5% depending on the options selected.