


ENERSYL® FR CONTROL

Control cables

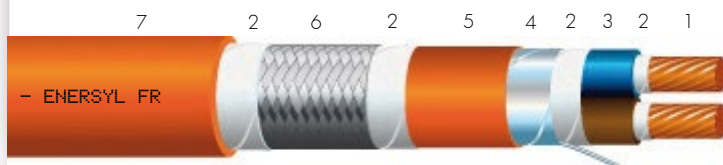

- 1 • Stranded bare copper core, class 2 as per IEC 60228.
- 2 • Optional separating tape.
- 3 • Insulation: silicone rubber as per NF C 32-090 + optional filler(s).
- 4 • (optional) Electrical screen: aluminium/PET tape + continuity wire (EG) / tin-plated copper braid (BE) / bare copper braid (BR).
- 5 • (optional) Internal sheath: HFFR, type ST8 as per IEC 60502-1.
- 6 • (optional) Armour: galvanized steel braid (BG) / double steel tape (FA).
- 7 • Outer sheath: HFFR, type ST8 as per IEC 60502-1.

Reference

- (example) ENERSYL® FR EG BG CONTROL
19x1,5 mm²
FR : fire resistant
EG, BE, BR: type of electrical screen
BG, FA: type of armour
CONTROL: control cable
19: number of conductors
X, G: type of assembly: without (X)
or with (G) an earth wire
1.5 mm²: cross-section in mm²

Approvals - standards

- IEC 60228 / NF C 32-090.
- IEC 60332-1 / IEC 60332-3 / NF C 32-070
test C1.
- NF EN 50200.
- IEC 61034-2 / IEC 60754-1 / IEC 60754-2.

Markings

- OMERIN – ENERSYL < FR xx xx CONTROL >
< cross-section > – 450/750V – < batch > – < year >

Standard products

- Sheath: orange.
- Colour identification of conductors:
< up to 5 conductors: as per HD 308 S2.
> more than 5 conductors: white numbered.

Technical characteristics

Thermal

- Continuous operating temperature: -30°C to +80°C.
- Maximum core temperature: +90 °C.

Electrical

- Rated voltage: 450/750 V.
- Test voltage: 2500 V.

Smoke - fire

- Flame retardant – cable alone:
IEC 60332-1-2 / NF EN 60332-1-2 / NF C 32-070 test C2.
- Flame retardant – bunched cable:
IEC 60332-3-22 cat. A / NF EN 60332-3-22 cat. A.
- Fire retardant: NF C 32-070 test C1.
- Fire resistant: NF EN 50200.
- Low smoke density: IEC 61034-2 / NF EN 61034-2.
- Halogen-free: IEC 60754-1 / NF EN 60754-1.
- Low corrosivity of gas emissions: IEC 60754-2 / NF EN 60754-2.

Resistance of outer sheath to chemical attacks as per OMERIN test report NT140220-01:

- Good resistance to acid.
- Good resistance to base.
- Fairly good resistance to aliphatic hydrocarbons.
- Resistance to water: type AD7 as per IEC 60529 without immersion of ends.
- Resistance to UV ≥ 2000 hours as per EN 16472.

Options

- FLEX: flexible tin-plated copper core, class 5 as per IEC 60228.
- Other colours: contact us.
- 105 °C cable: contact us.
- ATEX as per EN 60079-14.

Particularly suited for static facilities in potentially explosive environments with "i" intrinsic safety protection mode, requiring specific identification of cables.
Colour of the sheath: blue as per EN 60079-14 part 16.2.2.6.

- > ENERSYL® FR EX CONTROL: without electrical screen.
- > ENERSYL® FR BE EX CONTROL: with electrical screen.

For this product, please contact:

OMERIN division principale

Zone Industrielle - F 63600 Ambert
Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10
omerin@omerin.com

OMERIN division silisol

BP 87 - ZI du Devey - F 42000 Saint-Etienne
Tel. +33 (0)4 77 81 36 00 - Fax +33 (0)4 77 81 37 00
silisol@omerin.com

omerin
LES CABLES DE L'EXTREME

www.omerin.com

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.
For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

® Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.

NON-SHIELDED CABLES

ARMoured CABLES

Nominal cross-section (mm ²)	Nominal stranding	Nominal thickness of insulation (mm)	Nominal diameter of conductors (mm)	Nominal thickness of the sheath (mm)	Nominal outside diameter* (mm)	Approximate linear weight (kg/km)	Nominal thickness of the sheath (mm)	Nominal outside diameter* (mm)	Approximate linear weight (kg/km)	Max. linear resistance at 20 °C (Ω/km)
2 x 0.34	7 / 0.25	0.6	2.0	0.6	5.6	32	1.0	8.7	107	57.5
3 x 0.34	7 / 0.25	0.6	2.0	0.6	5.9	40	1.0	9.0	119	57.5
4 x 0.34	7 / 0.25	0.6	2.0	0.6	6.4	49	1.0	9.5	134	57.5
5 x 0.34	7 / 0.25	0.6	2.0	0.6	7.0	58	1.0	10.2	152	57.5
7 x 0.34	7 / 0.25	0.6	2.0	0.7	7.8	77	1.0	11.0	181	57.5
12 x 0.34	7 / 0.25	0.6	2.0	0.8	10.4	129	1.1	13.8	270	57.5
19 x 0.34	7 / 0.25	0.6	2.0	1.0	12.5	197	1.2	16.1	371	57.5
24 x 0.34	7 / 0.25	0.6	2.0	1.1	14.7	250	1.2	18.4	457	57.5
27 x 0.34	7 / 0.25	0.6	2.0	1.1	15.0	273	1.2	18.9	503	57.5
37 x 0.34	7 / 0.25	0.6	2.0	1.2	16.9	360	1.3	21.0	628	57.5
2 x 0.5	7 / 0.30	0.6	2.1	0.6	5.8	36	1.0	8.9	114	36.0
3 x 0.5	7 / 0.30	0.6	2.1	0.6	6.1	46	1.0	9.2	127	36.0
4 x 0.5	7 / 0.30	0.6	2.1	0.6	6.7	56	1.0	9.8	144	36.0
5 x 0.5	7 / 0.30	0.6	2.1	0.7	7.5	70	1.0	10.7	170	36.0
7 x 0.5	7 / 0.30	0.6	2.1	0.7	8.1	90	1.0	11.3	197	36.0
12 x 0.5	7 / 0.30	0.6	2.1	0.9	11.0	155	1.1	14.4	304	36.0
19 x 0.5	7 / 0.30	0.6	2.1	1.0	13.0	231	1.2	16.6	411	36.0
24 x 0.5	7 / 0.30	0.6	2.1	1.1	15.3	293	1.2	19.2	527	36.0
27 x 0.5	7 / 0.30	0.6	2.1	1.2	15.8	327	1.3	19.9	579	36.0
37 x 0.5	7 / 0.30	0.6	2.1	1.2	17.7	429	1.3	21.8	708	36.0
2 x 0.75	7 / 0.37	0.6	2.4	0.6	6.4	44	1.0	9.5	129	24.5
3 x 0.75	7 / 0.37	0.6	2.4	0.6	6.8	58	1.0	9.9	147	24.5
4 x 0.75	7 / 0.37	0.6	2.4	0.7	7.6	75	1.0	10.8	176	24.5
5 x 0.75	7 / 0.37	0.6	2.4	0.7	8.3	90	1.0	11.5	199	24.5
7 x 0.75	7 / 0.37	0.6	2.4	0.7	9.0	116	1.0	12.2	234	24.5
12 x 0.75	7 / 0.37	0.6	2.4	1.0	12.5	207	1.2	16.1	381	24.5
19 x 0.75	7 / 0.37	0.6	2.4	1.1	14.7	308	1.2	18.4	514	24.5
24 x 0.75	7 / 0.37	0.6	2.4	1.2	17.3	390	1.3	21.4	663	24.5
27 x 0.75	7 / 0.37	0.6	2.4	1.2	17.8	431	1.3	21.8	712	24.5
37 x 0.75	7 / 0.37	0.6	2.4	1.3	20.0	573	1.3	24.1	886	24.5
2 x 1	7 / 0.43	0.6	2.5	0.6	6.5	49	1.0	9.6	135	18.1
3 x 1	7 / 0.43	0.6	2.5	0.6	6.9	64	1.0	10.0	155	18.1
4 x 1	7 / 0.43	0.6	2.5	0.7	7.7	84	1.0	10.9	187	18.1
5 x 1	7 / 0.43	0.6	2.5	0.7	8.4	101	1.0	11.6	212	18.1
7 x 1	7 / 0.43	0.6	2.5	0.7	9.2	132	1.0	12.4	252	18.1
12 x 1	7 / 0.43	0.6	2.5	1.0	12.7	233	1.2	16.3	410	18.1
19 x 1	7 / 0.43	0.6	2.5	1.1	15.0	349	1.2	18.9	579	18.1
24 x 1	7 / 0.43	0.6	2.5	1.2	17.8	446	1.3	21.8	726	18.1
27 x 1	7 / 0.43	0.6	2.5	1.2	18.1	490	1.3	22.2	775	18.1
37 x 1	7 / 0.43	0.6	2.5	1.3	20.4	652	1.3	24.5	972	18.1
2 x 1.5	7 / 0.52	0.6	2.8	0.6	7.2	63	1.0	10.4	160	12.1
3 x 1.5	7 / 0.52	0.6	2.8	0.7	7.8	88	1.0	11.0	192	12.1
4 x 1.5	7 / 0.52	0.6	2.8	0.7	8.5	110	1.0	11.7	223	12.1
5 x 1.5	7 / 0.52	0.6	2.8	0.7	9.4	133	1.0	12.6	256	12.1
7 x 1.5	7 / 0.52	0.6	2.8	0.8	10.5	183	1.1	13.9	325	12.1
12 x 1.5	7 / 0.52	0.6	2.8	1.1	14.3	317	1.2	18.0	519	12.1
19 x 1.5	7 / 0.52	0.6	2.8	1.2	16.9	476	1.3	21.0	744	12.1
24 x 1.5	7 / 0.52	0.6	2.8	1.3	20.0	607	1.3	24.1	920	12.1
27 x 1.5	7 / 0.52	0.6	2.8	1.3	20.4	669	1.3	24.5	988	12.1
37 x 1.5	7 / 0.52	0.6	2.8	1.3	22.8	882	1.4	27.1	1249	12.1
2 x 2.5	7 / 0.67	0.7	3.4	0.7	8.6	94	1.0	11.8	208	7.41
3 x 2.5	7 / 0.67	0.7	3.4	0.7	9.1	128	1.0	12.3	247	7.41
4 x 2.5	7 / 0.67	0.7	3.4	0.8	10.3	169	1.1	13.7	309	7.41
5 x 2.5	7 / 0.67	0.7	3.4	0.9	11.5	210	1.1	14.9	365	7.41
7 x 2.5	7 / 0.67	0.7	3.4	1.0	12.7	284	1.2	16.3	460	7.41
12 x 2.5	7 / 0.67	0.7	3.4	1.2	17.0	477	1.3	21.1	747	7.41
19 x 2.5	7 / 0.67	0.7	3.4	1.3	20.2	727	1.3	24.3	1043	7.41
24 x 2.5	7 / 0.67	0.7	3.4	1.3	23.6	907	1.4	27.9	1287	7.41
27 x 2.5	7 / 0.67	0.7	3.4	1.3	24.1	1004	1.4	28.4	1331	7.41
37 x 2.5	7 / 0.67	0.7	3.4	1.4	27.2	1311	1.5	31.7	1796	7.41

* The rated outer diameter of cables may vary by +/- 15% depending on the options selected.

www.omerin.com

omerin
LES CABLES DE L'EXTREME

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.
For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.
© Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.