

MULTIMAX® CI



Approvals - standards

- Fire retardant as per IEC 60332-3-22.
- Flame retardant as per IEC 60332-1-2.
 - Halogen free as per IEC 60754-1.
- No smoke corrosiveness as per IEC 60754-2.
 - Low smoke opacity as per IEC 61034-2.
- Manufacture and test as per IEC 60092-376 and IEC 60092-350.
 - BVM certification.

Applications

- Fixed installation on board ships.

Markings

- OMERIN 332 - MULTIMAX <CI or CI EG or CI EI> 150/250V <cross-section> 90C IEC 60332-3-22 <year>

Options

- FLEX series (flexible tin-plated copper core, class 5 as per IEC 60092-376).
- Outer sheath in cross-linked HFFR compound, type SHF2 (BVM certification).


INSTRUMENTATION AND CONTROL CABLES, 150/250 V



MULTIMAX CI: multi-conductor



MULTIMAX CI EG: general screen

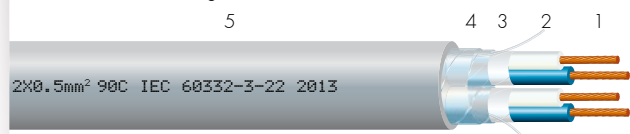

MULTIMAX CI EI: individual screen

- 1 • Stranded bare copper core, class 2 as per IEC 60092-376.
- 2 • Cross-linked polyethylene insulation, type HF XLPE.
- 3 • Electrical shielding: aluminium/PET tape + continuity wire.
- 4 • Separating tape.
- 5 • Outer sheath in cross-linked HFFR compound, type SHF1.

Characteristics

- Rated voltage: 150/250 V.
- Test voltage: 1500 V.
- Continuous operating temperature: -30 °C to +80 °C.
- Maximum core temperature: +90 °C.
- Maximum core temperature in short-circuit: +250 °C.
- Minimum bending radius: 8 x D.

Standard products

- Outer sheath: grey.
- Colour identification of conductors:
 - > Multi-conductor: white numbered.
 - > Pair: blue-white numbered.
 - > Triple: blue-white-red numbered.
 - > Quad: blue-white-red-black numbered.

For this product, please contact:

OMERIN division principale

Zone Industrielle - F 63600 Ambert
Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10
omerin@omerin.com

OMERIN division silisol

BP 87 - ZI du Devey - F 42000 Saint-Étienne
Tel. +33 (0)4 77 81 36 00 - Fax +33 (0)4 77 81 37 00
silisol@omerin.com

omerin
LES CABLES DE L'EXTREME

www.omerin.com

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force. For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

® Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.

CORE	SHEATH			
	Nominal cross-section (mm ²)	Nominal outside diameter (mm)		Approximate linear weight (kg/km)
		EG	EI	EG
1 x 2 x 0.5	6.0		39	
2 x 2 x 0.5 ⁽¹⁾	6.7	8.8	66	70
3 x 2 x 0.5	8.8	9.5	83	87
4 x 2 x 0.5	9.8	10.4	102	109
5 x 2 x 0.5	10.6	11.3	124	130
7 x 2 x 0.5	11.5	13.4	157	164
10 x 2 x 0.5	13.8	15.9	224	234
12 x 2 x 0.5	15.1	16.4	254	265
14 x 2 x 0.5	16.1	17.2	288	300
19 x 2 x 0.5	17.9	19.3	372	386
24 x 2 x 0.5	21.0	22.7	471	490
1 x 3 x 0.5	6.2		46	
2 x 3 x 0.5	9.7	9.9	86	90
3 x 3 x 0.5	9.9	10.5	109	117
7 x 3 x 0.5	12.9	13.8	214	222
12 x 3 x 0.5	17.2	18.3	351	364
1 x 4 x 0.5	6.7		56	
3 x 4 x 0.5	12.0	12.0	149	149
7 x 4 x 0.5	16.2	16.2	288	288
1 x 2 x 0.75	6.8		50	
2 x 2 x 0.75 ⁽¹⁾	7.7	10.4	89	97
3 x 2 x 0.75	10.4	11.1	116	122
4 x 2 x 0.75	11.4	12.3	144	150
5 x 2 x 0.75	12.5	13.4	172	180
7 x 2 x 0.75	13.6	15.8	222	230
10 x 2 x 0.75	16.6	19.0	317	331
12 x 2 x 0.75	18.3	19.6	363	377
14 x 2 x 0.75	19.1	20.6	412	428
19 x 2 x 0.75	21.6	23.1	536	555
24 x 2 x 0.75	25.3	27.4	681	708
1 x 3 x 0.75	7.2		62	
2 x 3 x 0.75	10.9	11.5	120	126
3 x 3 x 0.75	11.5	12.4	155	162
7 x 3 x 0.75	15.5	16.5	306	316
12 x 3 x 0.75	20.5	22.1	506	523
1 x 4 x 0.75	7.6		76	
3 x 4 x 0.75	14.3	14.3	208	208
7 x 4 x 0.75	19.3	19.3	413	413
1 x 2 x 1	7.1		58	
2 x 2 x 1 ⁽¹⁾	8.2	11.1	108	114
3 x 2 x 1	11.1	11.8	139	145
4 x 2 x 1	12.1	13.1	173	180
5 x 2 x 1	13.4	14.3	208	217
7 x 2 x 1	14.6	15.9	270	280
10 x 2 x 1	19.0	20.4	387	403
12 x 2 x 1	19.7	21.1	445	462
14 x 2 x 1	20.7	22.3	507	525
19 x 2 x 1	23.2	25.1	662	685
24 x 2 x 1	27.3	29.5	842	873
1 x 3 x 1	7.5		73	
2 x 3 x 1	11.6	12.3	143	150
3 x 3 x 1	12.3	13.3	187	195
7 x 3 x 1	18.8	17.7	375	387
12 x 3 x 1	22.3	23.8	625	645
1 x 4 x 1	8.2		90	
3 x 4 x 1	15.4	15.4	252	252
7 x 4 x 1	20.7	20.7	508	508

⁽¹⁾: for the EG cables: assembled as a quad.

CORE	SHEATH			
	Nominal cross-section (mm ²)	Nominal outside diameter (mm)		Approximate linear weight (kg/km)
		EG	EI	EG
1 x 2 x 1.5	8.1		75	
2 x 2 x 1.5 ⁽¹⁾	9.5	12.9	143	150
3 x 2 x 1.5	12.9	13.8	186	194
4 x 2 x 1.5	14.1	15.4	234	243
5 x 2 x 1.5	15.7	16.8	283	294
7 x 2 x 1.5	17.1	18.5	370	384
10 x 2 x 1.5	21.0	23.8	534	555
12 x 2 x 1.5	22.9	24.8	616	638
14 x 2 x 1.5	24.3	26.1	704	728
19 x 2 x 1.5	27.3	29.3	924	954
24 x 2 x 1.5	32.1	34.7	1178	1312
1 x 3 x 1.5	8.6		97	
2 x 3 x 1.5	13.5	14.4	192	200
3 x 3 x 1.5	14.4	15.6	255	264
7 x 3 x 1.5	19.4	20.7	520	536
12 x 3 x 1.5	26.0	28.0	872	898
1 x 4 x 1.5	9.5		120	
3 x 4 x 1.5	18.2	18.2	344	344
7 x 4 x 1.5	24.4	24.4	705	705
2 x 0.5	5.8		39	
3 x 0.5	6.1		47	
4 x 0.5	6.6		56	
5 x 0.5	7.1		65	
7 x 0.5	7.6		82	
10 x 0.5	9.7		115	
12 x 0.5	10.0		130	
14 x 0.5	10.4		145	
19 x 0.5	11.5		190	
24 x 0.5	13.5		239	
27 x 0.5	13.8		261	
37 x 0.5	15.6		341	
2 x 0.75	6.5		50	
3 x 0.75	6.8		61	
4 x 0.75	7.5		75	
5 x 0.75	8.2		89	
7 x 0.75	8.9		113	
10 x 0.75	11.0		157	
12 x 0.75	11.3		186	
14 x 0.75	12.4		210	
19 x 0.75	13.7		271	
24 x 0.75	16.2		342	
27 x 0.75	16.5		375	
37 x 0.75	18.6		494	
2 x 1	7.0		57	
3 x 1	7.4		72	
4 x 1	8.0		89	
5 x 1	8.8		107	
7 x 1	9.7		137	
10 x 1	12.1		190	
12 x 1	12.7		226	
14 x 1	13.3		250	
19 x 1	14.7		334	
24 x 1	17.4		421	
27 x 1	17.8		463	
37 x 1	20.0		612	
2 x 1.5	7.8		75	
3 x 1.5	8.5		96	
4 x 1.5	9.4		120	
5 x 1.5	10.2		146	
7 x 1.5	11.1		190	
10 x 1.5	14.1		262	
12 x 1.5	14.6		311	
14 x 1.5	15.6		350	
19 x 1.5	17.3		463	
24 x 1.5	20.3		586	
27 x 1.5	20.7		645	
37 x 1.5	23.4		857	