



PACKAGING AND TECHNICAL DATA

**omerin**  
LES CABLES DE L'EXTREME




- The world's leading manufacturer of silicone-insulated wires and cables
- Europe's leading manufacturer of glass-yarn braids
- France's leading manufacturer of fire safety cables

*The Omerin group has been producing electrical cables for extreme conditions since 1959*

*At Omerin, we use our know-how and technology to develop increasingly high-performance products.*

*Our expertise is recognized in over 120 countries.*

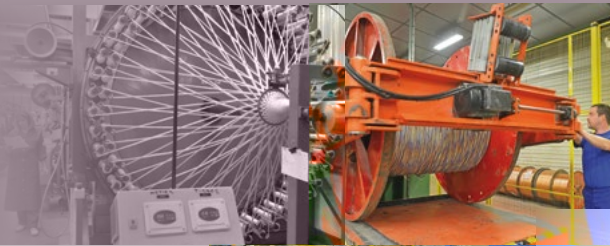

Omerin offers a wide range of high-performance products covering a large number of applications in very diverse industries, including the electrothermal construction, electromechanical, chemical, nuclear energy, railway, naval, aeronautical, heavy industry, power plant and other sectors.

Our product range is further extended by varnished, impregnated and treated braided insulating sleeveings, door seals for ovens, fireproof sleeveings, thermocouple, extension and compensation cables as well as industrial braids.

### **Men and women at your service**

The technical expertise of our teams is at your disposal, providing responses and solutions to all your requirements.

Our Methods, Quality and Research and Development Departments work permanently together with the aim of constantly improving our products and processes.

All our staff subscribe to this approach with their involvement and constant self-checking at all stages of production.

#### **List of all the available catalogues:**

**HIGH TEMPERATURE WIRES AND CABLES FOR THE GENERAL MARKET** ①  
**SECTION I: CROSS LINKED ELASTOMERS**

**HIGH TEMPERATURE WIRES AND CABLES FOR THE GENERAL MARKET** ②  
**SECTION II: FLUOROPOLYMERS AND THERMOPLASTICS**

**HIGH TEMPERATURE WIRES AND CABLES FOR THE GENERAL MARKET** ③  
**SECTION III: COMPOSITE INSULATIONS**

**FIRE RESISTANT SAFETY CABLES** ④

**CABLE SOLUTIONS FOR ROLLING STOCK** ⑤

**CABLES FOR POWER STATIONS AND HIGH-RISK SITES** ⑥

**MARINE CABLES** ⑦

**PYROMETRY CABLES** ⑧

**BRAIDED INSULATING SLEEVINGS** ⑨

**HIGH TEMPERATURE MEDIUM VOLTAGE POWER CABLES** ⑩

**PACKAGING AND TECHNICAL DATA**

Ultimately, this catalogue is the result of the passionate endeavours of an entire team, who have displayed great talent in writing it for you.

It is designed to be a simple and concise working tool for you, serving as a reference document that is able to meet the majority of your needs.

This catalogue, as well as ten others from our collection are available on line with real time updates and much more information at

**[www.omerin.com](http://www.omerin.com)**

**All the trademarks listed below are registered trademarks of the OMERIN Group.**

**BIO-HABITAT®** Wires and cables for a home without electromagnetic interference

**CERAFIL®** Miniature ceramic insulated wires for very high temperatures

**COAXRAIL®** Coaxial cables for railway industry

**COAXTHERM®** High temperature coaxial cables

**COUPLIX®** Pyrometry cables (thermocouples, extension, compensation cables)

**DATARAIL®** Data cables for the railway industry

**ELECTROAIR®** Aerospace & Defence wires and cables

**ENERSYL®** Electrical cables for power station and high risk sites

**FLEXBAT®** Extra flexible battery cables

**LUMIPLAST®** Wires and cables for lighting systems

**METALTRESSE®** High performance metallic braids

**MINOROC®** Very high tensile strength synthetic cables

**MULTIMAX®** Power, control and instrumentation cables for the marine industry

**MULTI-VX®** Hybrid data and power cables

**ODIOSIS®** Sound, amplification and loudspeaker cables

**OILPLAST®** Cables for industrial environments and intrinsically safe system

**OMBILIFLEX®** High performance special multi-function cables

**PLASTHERM®** Special thermoplastic insulated wires and cables

**POWER CONNECT®** High performance power cords

**PROFIPLAST®** Thermoplastic insulated wires and cables

**PYRISOL®** Fire resistant power cables for safety circuits

**PYRITEL®** Fire resistant communication cables for safety circuits

**SILIBOX®** Wire and cables cardboard box packaging system

**SILICABLE®** Special high temperature wires and cables

**SILICOU®** Low and medium voltage class H (180°C) power cables

**SILIFLAM®** Very high safety cables for extreme temperatures

**SILIFLON®** Fluoropolymer insulated high temperature wires and cables

**SILIGAIN®** Braided insulating sleeveings

**SILIRAD®** Electron beam cross-linked cables

**SILITUBE®** Braided or extruded tubes

**SOLARPLAST®** Power cables for photovoltaic solar panels

**SONDIX®** Platinum resistance temperature sensors connection cables

**SPIRFLEX®** High performance spiral cables

**TEXALARM®** Cables for safety systems and fire alarms

**TS CABLES®** Coaxial and data cables

**TS COM 900®** Telephonic cables for very speed reception

**TS LAN®** Copper LAN cables

**TWINLINK®** High temperature controlled impedance twisted pair cables

**TWINPLAST®** Extra flexible cables for battery chargers or jump starters


**VARPREN®** Wires and cables with special cross-linked Varpren® insulation

**VEROX®** Fiberglass braided seals

**VIDEOCOAX®** Analog and digital video cables



## Thermal classification of insulations

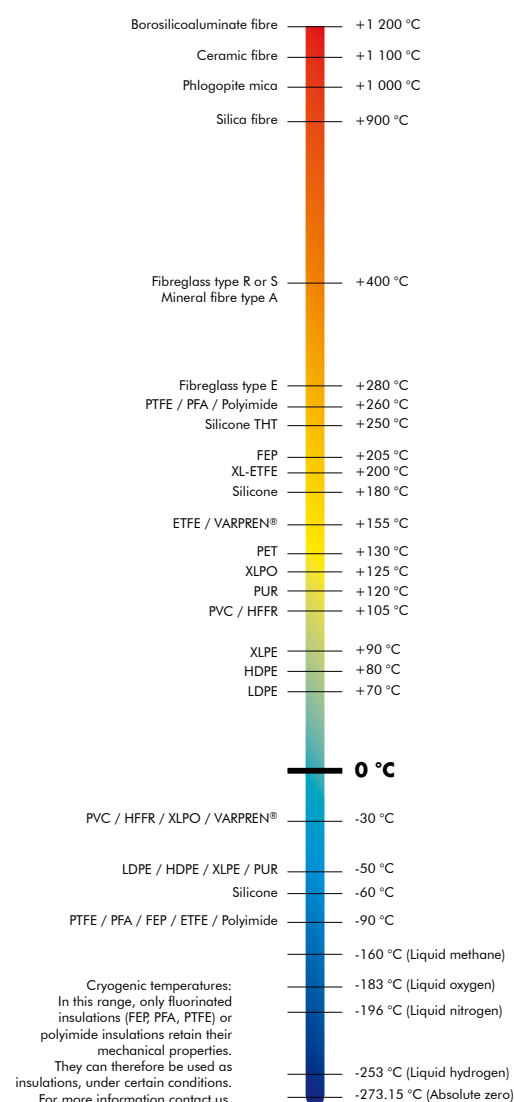




# Contents

|                                      |                       |
|--------------------------------------|-----------------------|
| <b>PACKAGING OPTIONS</b>             | <i>Pages 4 to 7</i>   |
| <b>GENERAL</b>                       | <i>Pages 8 to 9</i>   |
| <b>CONDUCTING CORES</b>              | <i>Pages 10 to 13</i> |
| <b>INSULATIONS</b>                   | <i>Pages 14 to 15</i> |
| <b>PERMISSIBLE CURRENTS</b>          | <i>Pages 16 to 17</i> |
| <b>FIRE AND FLAME TESTS</b>          | <i>Pages 18 to 20</i> |
| <b>STANDARDS AND NORMS</b>           | <i>Page 21</i>        |
| <b>INTERNATIONAL SYSTEM OF UNITS</b> | <i>Page 22</i>        |
| <b>CONVERSION FACTORS</b>            | <i>Page 23</i>        |



# Packaging on drums

## Drum dimensions

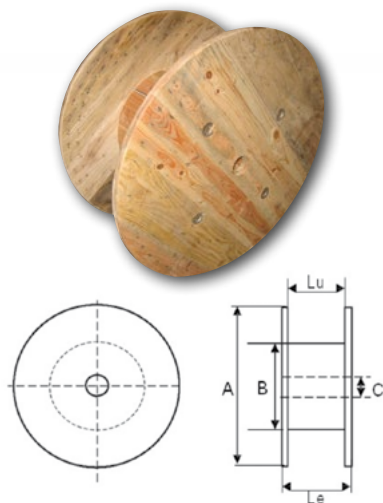

| ODP                   | Drum reference | ODS     | ODB   | Nature of flanges    | Diameter A mm | Diameter B mm | Diameter C mm | Le mm | Lu mm | Approximate weight kg |
|-----------------------|----------------|---------|-------|----------------------|---------------|---------------|---------------|-------|-------|-----------------------|
| <b>Cat. T - Drums</b> |                |         |       |                      |               |               |               |       |       |                       |
| -                     | -              | -       | T 300 | Plywood              | 300           | 150           | 33            | 216   | 200   | 1.1                   |
| T 400                 | T 400          | -       | -     | Plywood              | 400           | 148           | 31            | 316   | 300   | 2.4                   |
| T 400B                | -              | -       | -     | Plywood              | 400           | 148           | 31            | 216   | 200   | 2.1                   |
| -                     | T 400D         | -       | -     | Plywood              | 400           | 208           | 42            | 216   | 200   | 2.0                   |
| -                     | T 450B         | -       | -     | Plywood              | 450           | 208           | 42            | 216   | 200   | 2.4                   |
| -                     | T 450          | T 450   | -     | Plywood              | 450           | 208           | 42            | 266   | 250   | 2.5                   |
| T 600                 | T 600          | T 600   | -     | Plywood              | 600           | 242           | 83            | 324   | 300   | 5.5                   |
| T 600C                | -              | -       | -     | Metal rimmed plywood | 600           | 315           | 42            | 330   | 300   | 6.8                   |
| T 750                 | T 750          | -       | -     | Plywood              | 750           | 300           | 83            | 480   | 450   | 11                    |
| T 750C                | -              | -       | -     | Metal rimmed wood    | 750           | 350           | 83            | 430   | 350   | 26                    |
| -                     | -              | T 750DB | -     | Plywood              | 750           | 300           | 83            | 375   | 350   | 8.9                   |
| T 900                 | T 900          | -       | -     | Wood                 | 900           | 420           | 83            | 526   | 458   | 25                    |
| T 900C                | -              | -       | -     | Metal rimmed wood    | 900           | 420           | 83            | 550   | 450   | 43                    |
| T 1050                | T 1050         | -       | -     | Wood                 | 1 050         | 530           | 83            | 526   | 458   | 40                    |
| T 1050C               | -              | -       | -     | Metal rimmed wood    | 1 050         | 545           | 83            | 550   | 450   | 60                    |
| T 1200                | T 1200         | -       | -     | Wood                 | 1 200         | 630           | 83            | 700   | 600   | 60                    |
| T 1200C               | -              | -       | -     | Metal rimmed wood    | 1 200         | 630           | 83            | 700   | 600   | 90                    |
| T 1400                | T 1400         | -       | -     | Wood                 | 1 400         | 720           | 83            | 712   | 600   | 115                   |
| T 1400C               | -              | -       | -     | Metal rimmed wood    | 1 400         | 720           | 83            | 712   | 600   | 150                   |
| T 1650                | T 1650         | -       | -     | Wood                 | 1 650         | 720           | 83            | 732   | 600   | 160                   |
| T 1650C               | -              | -       | -     | Metal rimmed wood    | 1 650         | 630           | 83            | 732   | 600   | 210                   |

## Theoretical drum capacity according to product diameter

|          |       |       |        |        |        |       |       |        |       |        |         |       |        |        |         |        |         |        |         |        |         |
|----------|-------|-------|--------|--------|--------|-------|-------|--------|-------|--------|---------|-------|--------|--------|---------|--------|---------|--------|---------|--------|---------|
| Ref. ODP | -     | T 400 | T 400B | -      | -      | -     | T 600 | T 600C | T 750 | T 750C | -       | T 900 | T 900C | T 1050 | T 1050C | T 1200 | T 1200C | T 1400 | T 1400C | T 1650 | T 1650C |
| Ref. ODS | -     | T 400 | -      | T 400D | T 450B | T 450 | T 600 | -      | T 750 | -      | T 750DB | T 900 | -      | T 1050 | -       | T 1200 | -       | T 1400 | -       | T 1650 | -       |
| Ref. ODB | T 300 | -     | -      | -      | -      | -     | T 600 | -      | -     | -      | -       | -     | -      | -      | -       | -      | -       | -      | -       | -      | -       |

| Diameter of product (mm) | Maximum cable length on DRUM dispatched*<br>(linear m) |       |       |       |       |       |        |        |        |        |        |        |        |        |        |        |        |        |        |        |        |   |
|--------------------------|--|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---|
| 2.0                      | 1 930  | 5 700 | 3 800 | 3 050 | 5 060 | 6 330 | 13 400 | 11 300 | 31 800 | 22 550 | 25 430 | -      | -      | -      | -      | -      | -      | -      | -      | -      | -      | - |
| 3.0                      | 830  | 2 500 | 1 650 | 1 320 | 2 200 | 2 760 | 6 000  | 4 910  | 13 930 | 9 960  | 11 240 | 19 310 | 19 060 | 25 610 | 24 490 | -      | -      | -      | -      | -      | -      | - |
| 4.0                      | 480  | 1 380 | 920   | 760   | 1 260 | 1 570 | 3 290  | 2 760  | 7 910  | 5 520  | 6 320  | 10 790 | 10 600 | 14 240 | 13 630 | 21 200 | 21 200 | -      | -      | -      | -      | - |
| 5.0                      | 310  | 900   | 600   | 480   | 790   | 980   | 2 080  | 1 770  | 5 080  | 3 630  | 4 090  | 7 020  | 6 940  | 9 250  | 8 810  | 13 790 | 13 790 | 19 870 | 19 870 | -      | -      | - |
| 6.0                      | 190  | 600   | 390   | 310   | 530   | 650   | 1 460  | 1 220  | 3 480  | 2 490  | 2 810  | 4 730  | 4 670  | 6 400  | 6 010  | 9 520  | 9 520  | 13 680 | 13 680 | 22 120 | 23 330 |   |
| 7.0                      | 150  | 450   | 300   | 220   | 400   | 500   | 1 030  | 870    | 2 510  | 1 850  | 2 060  | 3 470  | 3 420  | 4 610  | 4 450  | 6 820  | 6 820  | 9 920  | 9 920  | 16 060 | 16 940 |   |
| 8.0                      | 120  | 340   | 230   | 170   | 310   | 390   | 780    | 680    | 1 970  | 1 320  | 1 510  | 2 630  | 2 580  | 3 560  | 3 400  | 5 300  | 5 300  | 7 690  | 7 690  | 12 190 | 13 120 |   |
| 9.0                      | 90   | 250   | 160   | 130   | 230   | 280   | 620    | 520    | 1 540  | 1 060  | 1 170  | 2 030  | 2 030  | 2 800  | 2 720  | 4 190  | 4 190  | 6 010  | 6 010  | 9 730  | 10 360 |   |
| 10.0                     | 70   | 210   | 140   | 110   | 190   | 240   | 490    | 440    | 1 270  | 870    | 980    | 1 680  | 1 680  | 2 220  | 2 140  | 3 350  | 3 350  | 4 960  | 4 960  | 7 850  | 8 500  |   |
| 11.0                     | 50   | 160   | 110   | 80    | 160   | 190   | 420    | 360    | 1 010  | 670    | 780    | 1 380  | 1 350  | 1 850  | 1 730  | 2 760  | 2 760  | 3 990  | 3 990  | 6 360  | 6 760  |   |
| 12.0                     | 40   | 130   | 80    | 70    | 120   | 160   | 360    | 300    | 820    | 590    | 700    | 1 130  | 1 100  | 1 540  | 1 430  | 2 300  | 2 300  | 3 420  | 3 420  | 5 420  | 5 830  |   |
| 13.0                     | 40   | 130   | 80    | 50    | 100   | 130   | 310    | 250    | 710    | 490    | 540    | 990    | 960    | 1 360  | 1 250  | 2 020  | 2 020  | 2 870  | 2 870  | 4 520  | 4 930  |   |
| 14.0                     | 30   | 100   | 60    | 50    | 100   | 120   | 250    | 200    | 620    | 430    | 490    | 850    | 850    | 1 090  | 1 110  | 1 620  | 1 620  | 2 370  | 2 370  | 3 870  | 4 090  |   |
| 15.0                     | 30   | 100   | 60    | 50    | 80    | 90    | 220    | 190    | 540    | 360    | 410    | 740    | 740    | 960    | 970    | 1 450  | 1 450  | 2 150  | 2 150  | 3 430  | 3 660  |   |
| 16.0                     | 20   | 70    | 40    | 30    | -     | 90    | 170    | 150    | 460    | 300    | 350    | 640    | 640    | 830    | 850    | 1 250  | 1 250  | 1 890  | 1 890  | 2 920  | 3 150  |   |
| 17.0                     | 10   | 70    | 40    | 30    | -     | 70    | 170    | 140    | 390    | 290    | 340    | 550    | 550    | 710    | 730    | 1 090  | 1 090  | 1 690  | 1 690  | 2 670  | 2 900  |   |
| 18.0                     | 10   | 50    | 30    | 30    | -     | 60    | 130    | 110    | 380    | 240    | 290    | 480    | 480    | 700    | 640    | 1 040  | 1 040  | 1 500  | 1 500  | 2 430  | 2 510  |   |
| 19.0                     | 10   | 50    | 30    | 30    | -     | 50    | 130    | 110    | 310    | 230    | 240    | 460    | 440    | 610    | 530    | 900    | 900    | 1 320  | 1 320  | 2 050  | 2 280  |   |
| 20.0                     | 10   | 50    | 30    | 20    | -     | 50    | 110    | 110    | 310    | 190    | 240    | 380    | 380    | 510    | 520    | 790    | 790    | 1 180  | 1 180  | 1 900  | 2 120  |   |
| 21.0                     | -  | -     | -     | -     | -     | -     | 100    | 80     | 260    | 180    | 190    | 370    | 370    | 490    | 440    | 740    | 740    | 1 020  | 1 020  | 1 680  | 1 780  |   |
| 22.0                     | -  | -     | -     | -     | -     | -     | 100    | 70     | 250    | 150    | 190    | 310    | 310    | 420    | 430    | 640    | 640    | 990    | 990    | 1 530  | 1 630  |   |
| 23.0                     | -  | -     | -     | -     | -     | -     | 80     | 70     | 200    | 150    | 160    | 300    | 300    | 400    | 360    | 630    | 630    | 870    | 870    | 1 500  | 1 600  |   |
| 24.0                     | -  | -     | -     | -     | -     | -     | 70     | 70     | 200    | 140    | 150    | 260    | 250    | 360    | 340    | 530    | 530    | 850    | 850    | 1 350  | 1 450  |   |
| 25.0                     | -  | -     | -     | -     | -     | -     | 70     | 50     | 200    | 140    | 150    | 250    | 250    | 340    | 350    | 520    | 520    | 740    | 740    | 1 210  | 1 310  |   |
| 26.0                     | -  | -     | -     | -     | -     | -     | 70     | 50     | 160    | 110    | 120    | 240    | 240    | 330    | 280    | 500    | 500    | 710    | 710    | 1 080  | 1 180  |   |
| 27.0                     | -  | -     | -     | -     | -     | -     | 50     | 50     | 150    | 100    | 110    | 190    | 190    | 270    | 270    | 420    | 420    | 610    | 610    | 1 040  | 1 150  |   |
| 28.0                     | -  | -     | -     | -     | -     | -     | 50     | 40     | 150    | 100    | 110    | 190    | 190    | 270    | 270    | 400    | 400    | 590    | 590    | 920    | 1 020  |   |
| 29.0                     | -  | -     | -     | -     | -     | -     | 50     | 40     | 120    | 100    | 110    | 180    | 180    | 250    | 220    | 380    | 380    | 570    | 570    | 890    | 900    |   |
| 30.0                     | -  | -     | -     | -     | -     | -     | 50     | 40     | 120    | 70     | 80     | 180    | 180    | 210    | 220    | 330    | 330    | 500    | 500    | 810    | 900    |   |
| 31.0                     | -  | -     | -     | -     | -     | -     | 50     | 30     | 110    | 70     | 90     | 140    | 140    | 200    | 210    | 310    | 310    | 480    | 480    | 780    | 800    |   |
| 32.0                     | -  | -     | -     | -     | -     | -     | 30     | 30     | 110    | 70     | 80     | 140    | 140    | 200    | 210    | 300    | 300    | 460    | 460    | 670    | 760    |   |
| 33.0                     | -  | -     | -     | -     | -     | -     | 30     | 30     | 100    | 70     | 80     | 130    | 130    | 190    | 160    | 300    | 300    | 400    | 400    | 670    | 700    |   |
| 34.0                     | -  | -     | -     | -     | -     | -     | 30     | 20     | 80     | 70     | 80     | 130    | 130    | 160    | 160    | 240    | 240    | 380    | 380    | 650    | 670    |   |
| 35.0                     | -  | -     | -     | -     | -     | -     | 30     | 20     | 80     | 70     | 60     | 130    | 120    | 160    | 150    | 240    | 240    | 380    | 380    | 580    | 670    |   |
| 36.0                     | -  | -     | -     | -     | -     | -     | 30     | 20     | 80     | 50     | 60     | 100    | 100    | 150    | 150    | 230    | 230    | 360    | 360    | 560    | 580    |   |
| 37.0                     | -  | -     | -     | -     | -     | -     | 30     | 20     | 80     | 50     | 60     | 100    | 100    | 150    | 150    | 230    | 230    | 310    | 310    | 560    | 580    |   |
| 38.0                     | -  | -     | -     | -     | -     | -     | 30     | 20     | 70     | 50     | 60     | 100    | 90     | 150    | 110    | 210    | 210    | 290    | 290    | 470    | 550    |   |
| 39.0                     | -  | -     | -     | -     | -     | -     | 30     | 20     | 70     | 40     | 50     | 90     | 90     | 140    | 110    | 210    | 210    | 290    | 290    | 470    | 490    |   |
| 40.0                     | -  | -     | -     | -     | -     | -     | 20     | 20     | 70     | 40     | 50     | 90     | 90     | 110    | 110    | 170    | 170    | 290    | 290    | 470    | 490    |   |
| 41.0                     | -  | -     | -     | -     | -     | -     | 20     | 10     | 50     | 40     | 50     | 90     | 80     | 110    | 100    | 160    | 160    | 270    | 270    | 440    | 470    |   |
| 42.0                     | -  | -     | -     | -     | -     | -     | 20     | 10     | 50     | 40     | 40     | 80     | 80     | 100    | 100    | 160    | 160    | 230    | 230    | 390    | 410    |   |
| 43.0                     | -  | -     | -     | -     | -     | -     | 10     | 10     | 50     | 40     | 40     | 80     | 80     | 100    | 100    | 150    | 150    | 210    | 210    | 370    | 390    |   |
| 44.0                     | -  | -     | -     | -     | -     | -     | 10     | 10     | 50     | 20     | 30     | 60     | 60     | 100    | 100    | 150    | 150    | 210    | 210    | 370    | 390    |   |
| 45.0                     | -  | -     | -     | -     | -     | -     | 10     | 10     | 50     | 20     | 30     | 60     | 60     | 100    | 100    | 150    | 150    | 210    | 210    | 370    | 390    |   |

ODP: OMERIN division principale // ODS: OMERIN division silsil // ODB: OMERIN division Berne

\* Indicative quantity varying according to the flexibility of the core and type of insulation.

Note: All our products supplied on drums are externally protected with a cardboard or plastic film wrapping.

[www.omerin.com](http://www.omerin.com)

**omerin**  
LES CABLES DE L'EXTREME


The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.

For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

® Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.

# Packaging on spools

## Spool dimensions

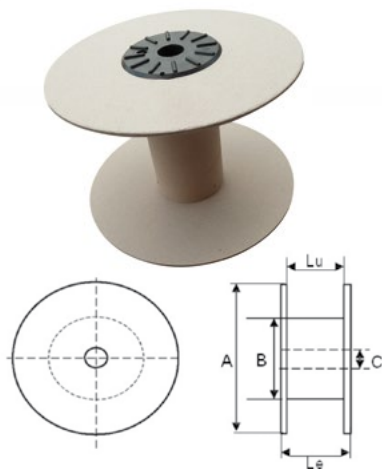

| Spool reference     |                 |        | Nature of<br>flanges | Diameter A<br>mm | Diameter B<br>mm | Diameter C<br>mm | Le<br>mm | Lu<br>mm | Approximate<br>weight<br>g |
|---------------------|-----------------|--------|----------------------|------------------|------------------|------------------|----------|----------|----------------------------|
| ODP                 | ODS             | ODB    |                      |                  |                  |                  |          |          |                            |
| Cat. T - Spools     |                 |        |                      |                  |                  |                  |          |          |                            |
| -                   | -               | B 120A | Plastic              | 120              | 50               | 45               | 40       | 35       | 48                         |
| -                   | -               | B 120B | Plastic              | 120              | 50               | 45               | 105      | 100      | 58                         |
| -                   | -               | B 170A | Plastic              | 170              | 67               | 64               | 72       | 68       | 92                         |
| -                   | -               | B 170B | Plastic              | 170              | 70               | 61.1             | 128      | 120      | 152                        |
| -                   | -               | B 210  | Plastic              | 225              | 72               | 67.5             | 60       | 54       | 192                        |
| -                   | B 270           | -      | Plastic              | 270              | 100              | 30               | 140      | 125      | 480                        |
| B 300               | B 300 cardboard | -      | Cardboard            | 300              | 100              | 30               | 210      | 200      | 730                        |
| B 300-BLA           | B 300 plastic   | -      | Plastic              | 300              | 100              | 30               | 220      | 200      | 720                        |
| Cat. D - DIN spools |                 |        |                      |                  |                  |                  |          |          |                            |
| D 80                | -               | -      | Plastic              | 80               | 50               | 15               | 80       | 65       | 80                         |
| D 100               | -               | -      | Plastic              | 100              | 60               | 15               | 100      | 80       | 125                        |
| D 125               | -               | -      | Plastic              | 125              | 80               | 15               | 125      | 100      | 160                        |
| D 160               | -               | -      | Plastic              | 160              | 100              | 22               | 160      | 123      | 360                        |
| D 200               | -               | -      | Plastic              | 200              | 125              | 22               | 200      | 160      | 630                        |
| D 250               | -               | -      | Plastic              | 250              | 160              | 22               | 197      | 160      | 1 050                      |

## Theoretical spool capacity according to product diameter

| Ref. ODP                                     | D 80  | D 100 | D 125 | D 160 | D 200  | D 250  | -      | -      | -      | -      | -      | -      | B 300 or B 300-BLA                  |
|--|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|-------------------------------------|
| Ref. ODS                                     | -     | -     | -     | -     | -      | -      | -      | -      | -      | -      | -      | B 270  | B 300 Cardboard<br>or B 300 Plastic |
| Ref. ODB                                     | -     | -     | -     | -     | -      | -      | B 120A | B 120B | B 170A | B 170B | B 210  | -      | -                                   |
| Maximum cable length on SPOOL*<br>(linear m) |       |       |       |       |        |        |        |        |        |        |        |        |                                     |
| 0.3  | 1 210 | 2 820 | 4 470 | 9 170 | 20 890 | -      | 2 620  | 7 530  | 11 240 | 19 510 | 17 370 | -      | -                                   |
| 0.4  | 690   | 1 570 | 2 480 | 5 210 | 11 710 | -      | 1 480  | 4 240  | 6 320  | 10 910 | 9 730  | -      | -                                   |
| 0.5  | 440   | 1 020 | 1 610 | 3 340 | 7 590  | 12 350 | 950    | 2 710  | 4 060  | 7 020  | 6 270  | -      | -                                   |
| 0.6  | 290   | 710   | 1 110 | 2 290 | 5 140  | 8 500  | 660    | 1 880  | 2 780  | 4 880  | 4 340  | 12 860 | 24 510                              |
| 0.7  | 220   | 510   | 800   | 1 660 | 3 830  | 6 290  | 470    | 1 340  | 2 050  | 3 550  | 3 180  | 9 420  | 18 010                              |
| 0.8  | 160   | 380   | 600   | 1 300 | 2 930  | 4 730  | 360    | 1 040  | 1 580  | 2 730  | 2 410  | 7 150  | 13 850                              |
| 0.9  | 130   | 300   | 470   | 1 010 | 2 280  | 3 690  | 280    | 830    | 1 220  | 2 160  | 1 920  | 5 660  | 10 890                              |
| 1.0  | 110   | 250   | 400   | 830   | 1 860  | 3 090  | 240    | 680    | 1 000  | 1 760  | 1 550  | 4 640  | 8 890                               |
| 1.1  | 90    | 200   | 310   | 680   | 1 560  | 2 470  | 190    | 550    | 820    | 1 410  | 1 290  | 3 800  | 7 280                               |
| 1.2  | 70    | 170   | 270   | 550   | 1 250  | 2 120  | 160    | 470    | 680    | 1 200  | 1 070  | 3 180  | 6 050                               |
| 1.3  | 60    | 140   | 220   | 480   | 1 110  | 1 750  | 140    | 390    | 580    | 1 010  | 910    | 2 690  | 5 190                               |
| 1.4  | 50    | 120   | 190   | 410   | 930    | 1 570  | 120    | 330    | 510    | 880    | 790    | 2 320  | 4 430                               |
| 1.5  | 40    | 110   | 180   | 360   | 820    | 1 340  | 100    | 300    | 450    | 780    | 680    | 2 050  | 3 870                               |
| 1.6  | 40    | 90    | 150   | 310   | 730    | 1 150  | 80     | 250    | 390    | 680    | 580    | 1 760  | 3 460                               |
| 1.7  | 30    | 80    | 120   | 270   | 650    | 1 030  | 80     | 220    | 340    | 590    | 530    | 1 590  | 3 060                               |
| 1.8  | 30    | 70    | 120   | 250   | 570    | 920    | 70     | 200    | 290    | 540    | 470    | 1 390  | 2 720                               |
| 1.9  | 30    | 60    | 100   | 220   | 500    | 830    | 60     | 170    | 270    | 470    | 420    | 1 250  | 2 400                               |
| 2.0  | 30    | 60    | 90    | 210   | 440    | 750    | 60     | 170    | 250    | 430    | 380    | 1 130  | 2 190                               |
| 2.1  | -     | 60    | 90    | 180   | 430    | 670    | 50     | 150    | 230    | 390    | 340    | 1 010  | 1 980                               |
| 2.2  | -     | 40    | 70    | 170   | 370    | 590    | 40     | 130    | 200    | 350    | 310    | 940    | 1 780                               |
| 2.3  | -     | 40    | 70    | 140   | 320    | 570    | 40     | 130    | 190    | 320    | 290    | 850    | 1 600                               |
| 2.4  | -     | 40    | 70    | 140   | 310    | 510    | 40     | 110    | 170    | 290    | 260    | 790    | 1 510                               |
| 2.5  | -     | 40    | 60    | 130   | 300    | 490    | 40     | 110    | 150    | 280    | 240    | 740    | 1 420                               |
| 2.6  | -     | 30    | 50    | 110   | 260    | 430    | 30     | 90     | 140    | 250    | 220    | 660    | 1 260                               |
| 2.7  | -     | 30    | 50    | 110   | 250    | 390    | 30     | 90     | 140    | 230    | 210    | 610    | 1 190                               |
| 2.8  | -     | 30    | 50    | 100   | 220    | 370    | 30     | 80     | 120    | 220    | 190    | 560    | 1 110                               |
| 2.9  | -     | 30    | 50    | 80    | 210    | 360    | 30     | 80     | 120    | 200    | 170    | 520    | 1 030                               |
| 3.0  | -     | 30    | 40    | 80    | 210    | 320    | 20     | 70     | 100    | 200    | 170    | 510    | 960                                 |
| 3.2  | -     | -     | 30    | 80    | 170    | 270    | 20     | 60     | 90     | 170    | 140    | 440    | 830                                 |
| 3.4  | -     | -     | 30    | 60    | 160    | 260    | 20     | 50     | 80     | 150    | 130    | 390    | 760                                 |
| 3.6  | -     | -     | 30    | 60    | 130    | 220    | 20     | 50     | 70     | 130    | 110    | 330    | 650                                 |
| 3.8  | -     | -     | -     | 50    | 130    | 210    | 10     | 40     | 60     | 110    | 100    | 300    | 590                                 |
| 4.0  | -     | -     | -     | 50    | 100    | 170    | 10     | 40     | 60     | 110    | 90     | 270    | 550                                 |
| 4.2  | -     | -     | -     | 40    | 100    | 170    | 10     | 40     | 60     | 90     | 80     | 240    | 490                                 |
| 4.4  | -     | -     | -     | 40    | 90     | 140    | 10     | 30     | 50     | 90     | 80     | 240    | 440                                 |
| 4.6  | -     | -     | -     | 30    | 70     | 130    | 10     | 30     | 40     | 70     | 70     | 210    | 400                                 |
| 4.8  | -     | -     | -     | 30    | 70     | 130    | 10     | 30     | 40     | 70     | 60     | 190    | 360                                 |
| 5.0  | -     | -     | -     | 30    | 70     | 120    | 10     | 30     | 40     | 70     | 60     | 190    | 360                                 |
| 5.5  | -     | -     | -     | -     | 60     | 90     | 10     | 20     | 30     | 50     | 50     | 140    | 280                                 |
| 6.0  | -     | -     | -     | -     | 40     | 70     | 10     | 20     | 20     | 40     | 40     | 120    | 240                                 |
| 6.5  | -     | -     | -     | -     | 40     | 70     | -      | 10     | 20     | 30     | 40     | 100    | 200                                 |
| 7.0  | -     | -     | -     | -     | 30     | 60     | -      | 10     | 20     | 30     | 30     | 80     | 170                                 |
| 7.5  | -     | -     | -     | -     | 30     | 50     | -      | 10     | 20     | 30     | 20     | 80     | 150                                 |
| 8.0  | -     | -     | -     | -     | 30     | 40     | -      | 10     | 20     | 20     | 20     | 70     | 130                                 |
| 8.5  | -     | -     | -     | -     | -      | 40     | -      | 10     | 10     | 20     | 20     | 50     | 120                                 |
| 9.0  | -     | -     | -     | -     | -      | 30     | -      | 10     | 10     | 20     | 20     | 50     | 100                                 |
| 9.5  | -     | -     | -     | -     | -      | 30     | -      | 10     | 10     | 10     | 10     | 40     | 80                                  |
| 10.0   | -     | -     | -     | -     | -      | 30     | -      | 10     | 10     | 10     | 10     | 40     | 80                                  |

ODP: OMERIN division principale

ODS: OMERIN division silsol

ODB: OMERIN division Berne

\* Indicative quantity varying according to the flexibility of the core and type of insulation.

Note: All our products supplied on spools are externally protected with a cardboard or plastic film band.


[www.omerin.com](http://www.omerin.com)

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.

For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

® Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.

## Packaging in SILIBOX®

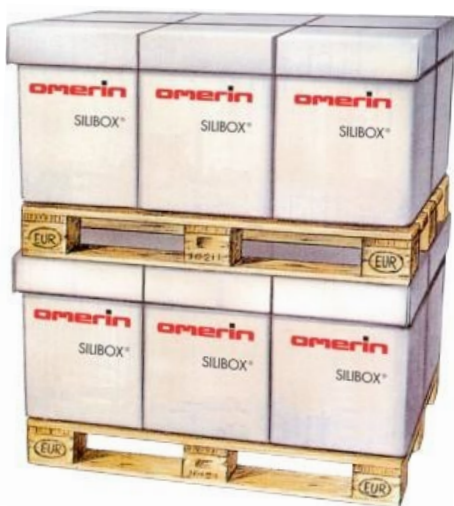

### Benefits of SILIBOX® packaging

- Recyclable disposable packaging on Euro Pallets (1200 x 800 mm) developed by OMERIN SAS.
- No deposits or returns.
- Reduced packaging waste.
- Easier handling.
- Reusable or recyclable boxes, practical and ecological.
- Reduced dimensions and storage costs.
- No costly or complicated unwinding system required: a simple return system positioned approx. 1.50 m above the box enables the cable to be pulled at high speed without breaking, entanglement and twisting.

*Independent boxes, individual lids and labels,  
individual handling grips.*



Box dimensions:  
400 mm x 400 mm. Height 500 mm

### Theoretical capacity of SILIBOX® according to cable diameter

| Product<br>diameter<br>mm | Maximum length of product on SILIBOX®<br>m |
|---------------------------|--|
| 1.0 to 1.2                | 8 000 to 6 500                             |
| 1.2 to 1.5                | 6 500 to 5 500                             |
| 1.5 to 1.7                | 5 500 to 5 000                             |
| 1.7 to 1.9                | 5 000 to 4 400                             |
| 1.9 to 2.1                | 4 400 to 3 600                             |
| 2.1 to 2.3                | 3 600 to 3 200                             |
| 2.3 to 2.6                | 3 200 to 2 500                             |
| 2.6 to 3.0                | 2 500 to 2 000                             |
| 3.0 to 4.0                | 2 000 to 1 000                             |
| > 4.0                     | < 1000                                     |

*Note: These quantities are likely to vary in significant proportions according to the rigidity of the cable, the nature of the insulation, etc.*

### The following references do not allow silibox packing:

- Wire with cross section bigger than 2.5 mm<sup>2</sup>.
- Wire with diameter above 5 mm or below 1 mm.
- Reference with silicone varnished braid (ex CSV, VS, NVS).
- Reference with thick silicone insulation (type CSVRI-HT, style 3304).
- Reference with PTFE tape insulation (ex KZ, EE...).
- Wire with solid core (class 1) and extra-flexible core (class 6).



## Other packaging options

### Rolls



Certain products (e.g. electric wires, sleeves, etc.) can be delivered in rolls (see illustration).


A roll features winding of product (wire or sleeve), with or without cardboard support. The product is maintained by adhesive tapes or stretchable film.

Some sleeves can be supplied in kit spool form. The flanges are made of cardboard and metal. Several spool dimensions are available (see illustration and table below).

### Spool kit



Some sleeves can be supplied in kit spool form. The flanges are made of cardboard and metal. Several spool dimensions are available (see illustration and table below).

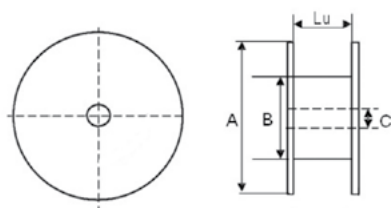

| Ref. ODP | Ø A<br>(mm) | Ø B<br>(mm) | Ø C<br>(mm) | Lu<br>(mm) |
|----------|-------------|-------------|-------------|------------|
| B180/100 | 180         | 82          | 30          | 100        |
| B180/150 | 180         | 82          | 30          | 150        |
| B300/100 | 300         | 82          | 30          | 100        |
| B300/150 | 300         | 82          | 30          | 150        |
| B300/200 | 300         | 82          | 30          | 200        |

## Instruction for transport, handling and storage

### General rules

For storage, transport and when handling, loading and unloading, care must be taken for not damaging the product or its packing, and so as not to alter its future use.

Upon reception, a visual control of the product and its packaging must be carried out, in order to make sure that everything is OK.

### Storage guidelines

For a good preservation of our products, they have to be stored as a general standard:

- In their original packing
- Protected from rain, in a dry place, with no risk of excessive humidity
- Protected from direct sun rays
- At temperatures from -10°C up to + 40°C
- Sheltered from shocks and other risks (clean and flat floor, sufficient spacing between the reels, ...)
- Do not stack the reels, store them vertically (horizontal axis)
- It is recommended to store the spools of wire vertically (horizontal axis).

### Specific instructions for reels and drums with flanges of diameter of 750 mm and more

Reels must be transported vertically, hold in place so as not to collide into each other. The impact could damage the outer sheathing of the cables. Transport of such size reels with flanges in a horizontal position is prohibited.

Unloading and handling will be done with lifting machines. If a forklift truck is used, the lifting will be done with a beam going through the central axis of the reel, or with the forks. In the later case, place both forks on both sides of the reel, and make sure that both flanges of the reel are onto the forks. At no time the forks must touch the cable.

In the case of a lifting machine, the lifting will be done with a beam and a sling which length will be long enough so the strength applied on the flanges of the reel will not be too important. The strength can be limited by the use of a lifting beam. At no time the lifting machine must touch the cable.

All these conditions are indicatives and non exhaustives.

## Comments on selecting an OMERIN cable

For reliable long-term service, it is important to select the right electric cable or wire for the application. The current cable market features many products whose main qualities are as much a result of the properties of insulation products available at this time, as the construction and the protection systems applied to cables. Relying on past experience may often be useful, but can sometimes be just as dangerous. As cable dimensions restrictions are sometimes complex, it is difficult to generally and directly assign a genuine advantage to various types of cables without deeper analysis of the intended application.

It is therefore essential to know all the environmental conditions for the application to ensure the cable is correctly dimensioned. Although non-exhaustive, the list below indicates the main restrictions to be taken into account in specifying electrical cables:

- **Electrical resistance:** All the electrical requirements of the application (type and voltage of power supply, current strength, etc.) are required and mandatory to define the cable. In particular, remember that the intrinsic temperature of the conductor may have a significant influence on its linear resistance. Furthermore, concerning the cable insulation, its insulation resistance varies according to its temperature.
- **Thermal resistance:** Exposure to excessive temperatures over a too long period may cause premature deterioration of the constituent cable materials (fissuring, combustion, flaking, etc.). The period of exposure is therefore as important as the temperature value itself, in the choice of materials which must resist both brief, high thermal shocks and prolonged exposure at lower temperatures. In this matter, note that the overall thermal resistance of the cable may not be higher than that of the constituent part with the lowest thermal resistance.
- **Presence of humidity:** For certain materials, the absorption of humidity may vary to certain degrees. If it exceeds a certain threshold, the level of humidity may generate faults within the electrical system itself.
- **Fire and/or flame resistance:** The non-spreading of vertical or horizontal flames may be a major characteristic of a cable. However, fire resistance is a completely different property to flame resistance. Indeed, for certain types of cable, applicable regulations impose a minimum duration of fire resistance, while maintaining the operational integrity of the cable.
- **Resistance to mechanical forces:** Certain forces of mechanical origin and external to the cable (bending, impacts, abrasion, crushing, etc.) may cause premature deterioration of certain insulation and sheathing materials (mechanical fatigue) and may cause the long-term loss of certain properties that are essential to the cable's life. For example and in general, tape insulation systems have difficulty supporting alternate bending cycles.
- **Resistance to chemical products:** Certain categories of chemical products (hydrocarbons, solvents, acids, etc.) may damage insulation or sheathing materials used on cables. Fluorinated materials are in general more resistant to chemical attacks than other materials used for cable insulation or sheathing.
- **Resistance to cryogenic temperatures:** In general, most materials used at low temperatures become brittle (flaking) or lose their natural flexibility. Only fluorinated insulation materials or polyimides retain their mechanical properties at cryogenic temperatures.
- **Pouring of molten metals:** This is often accidental any may cause partial or total destruction of the cable. Certain smart combinations of insulation or sheathing materials can nonetheless considerably reduce the risks of damage to the cable due to molten metal.
- **Emission and toxicity of smokes:** In case of fire, certain safety regulations define limits on the quantity of smokes emitted, along with their nature and toxicity rating. Certain materials present interesting properties in this area (fibreglass, silicone rubber, halogen-free polymers, etc.).
- **Resistance to radiation:** Taking into account this factor may be restrictive to the cable dimensioning. Indeed, certain materials such as polyimide insulation resist more effectively to radiation than other materials.

The following pages provide information on the materials used to make OMERIN cables. Our technical departments are at your service to provide all further information required.

# Glossary

## Conducting core (or conductor)

• The conductor core of a cable carries the current. It is generally circular, sometimes compacted. It comprises one or more strands of the same conducting metal, which in most cases can be aluminium or copper. To improve certain properties of the conducting metal, copper strands may be coated with a metal layer. Sometimes, which resistance to high temperatures is required, a conductor core made entirely of pure nickel strands is necessary.

- **Stranded core (IEC 60228 class 2):** circular core (compacted or not) comprising a set of wires assembled together.
- **Flexible core (IEC 60228 class 5):** circular core comprising a set of wires assembled together in concentric or bunched strands.
- **Ultra-flexible core (IEC 60228 class 6):** circular core comprising a set of very fine wires assembled together in concentric or bunched strands.
- **Concentric strand:** geometrically-arranged spiral assembly of wires featuring one or more separate layers.
- **Bunched strand:** spiral assembly where the wires have no pre-defined position.
- **Composite strand:** geometrical assembly of several concentric or bunched strands featuring one or more separate layers.
- **Theoretical cross-section:** Where  $n$  is the number of strands making up the core and  $d$  is the diameter of the strands, the theoretical cross-section is given by the following formula:

$$S = n \cdot \pi d^2 / 4$$

- **Nominal cross-section:** conventional or standard value of a core cross-section.

## Insulation

Single or multi-part layer, whose function is to electrically insulate the core against the outside.

- **Extruded insulation:** composite based on elastomer or thermoplastic technology forming a continuous, uniform and homogeneous layer.
- **Composite insulation:** composite featuring synthetic or mineral wires or tapes, lapped, braided, woven or wound around the core and treated, coated, lacquered or left in a natural state.

## Insulated conductor

Comprises the core, its insulation and possible other components (screen, separator, etc.).

## Assembly or twisted conductors

# Lexicon of vocabulary commonly used by the cable industry and/or defined in installation standards

## MECHANICAL STRESS IMPACT according to NF C 15-100

- **AG1** Low severity (Normal, e.g. household and similar equipment)
- **AG2** Medium severity (Standard industrial equipment, where applicable, or reinforced protection)
- **AG3** High severity (Reinforced protection)
- **AG4** Very high severity (mines, quarries...)

## RESISTANCE TO SOLAR RADIATIONS AND WEATHER

- **Excellent** Permanent exposure
- **Very good** Frequent exposure
- **Good** Occasional exposure
- **Fair** Accidental exposure
- **Poor** No exposure

## PRESENCE OF WATER according to NF C 15-100

- **AD1** Negligible (probability of presence of water is negligible)
- **AD2** Free falling drops (probability of presence of water is negligible)
- **AD3** Sprays (possibility of water falling as a spray at an angle up to 60° from the vertical)
- **AD4** Splashes (possibility of splashes from any direction)
- **AD5** Jets (possibility of jets of water from any direction)
- **AD6** Waves (possibility of water waves, seashore locations)

Group of insulated conductors assembled together, most commonly with a spiral layout, in one or more layers. The assembly pitch defines the length of a full rotation of the spiral along the axis of the cable, by a constituent component.

## Filler

Material whose function is to fill the gaps between the constituent components of an assembly.

## Separator

Film inserted between two components of a conductor or a cable to prevent interactions between them or to facilitate their separation. May also be used to facilitate the cable manufacturing.

## Screen

Conductive layer comprising metal tapes, generally made of aluminium or copper, metallic braids, generally copper, whose function is to insulate the conductor or the cable against external electromagnetic fields that may disturb its operation.

## Inner sheath

Continuous tubular layer of a non-metal material (elastomer or thermoplastic), usually extruded and covering the screen or the assembly of conductors and filler if any.

## Bedding

Layer of under-armour material.

## Armour

Layer of metal foil, round or flat metal wires, intended to protect the cable from external mechanical effects. The armour may be on the outside of the cable.

## Outer sheath (jacket)

Continuous, uniform tubular layer of a non-metal material (elastomer or thermoplastic), usually extruded and applied to the external part of the cable to provide external protection. The outer sheath must be appropriate for the immediate surroundings of the cable (humidity, water, fire, oils, solvents & chemical products, aggressive weather, UV radiation, X-rays, etc.).

- **AD7** Immersion (possibility of intermittent partial or total covering by water)
- **AD8** Submersion (equipment is permanently and totally covered)

## CHEMICAL RESISTANCE

- **Excellent** Permanent contact
- **Very good** Frequent contact
- **Good** Occasional contact
- **Fair** Accidental contact
- **Poor** No contact

## BEHAVIOUR TO FIRE according to NF C 32-070

- **C1** Fire retardant
- **C2** Flame retardant
- **C3** No classification to fire resistance
- **CR1** Fire resistant
- **CR2** All cables which are not CR1

# Nominal stranding and flexibility class

| Nominal cross-section |         | Solid cores<br>1 x d | Compacted round cores<br>Number of strands | Other stranding options - Number of strands / Diameter of strand (mm) |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |
|-----------------------|---------|----------------------|--|---|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
|                       |         |                      |  | d<br>n x d  | 0.50<br>n x 0.50 | 0.40<br>n x 0.40 | 0.30<br>n x 0.30 | 0.25<br>n x 0.25 | 0.20<br>n x 0.20 | 0.16<br>n x 0.16 | 0.15<br>n x 0.15 | 0.13<br>n x 0.13 | 0.10<br>n x 0.10 | 0.07<br>n x 0.07 | 0.05<br>n x 0.05 |
| 0.03                  | -       | 1 x 0.20             |  |   |                  |                  |                  |                  |                  |                  |                  |                  |                  | 10               | 20               |
| 0.05                  | 30      | 1 x 0.25             |  |   |                  |                  |                  |                  |                  |                  | 3                | 4                | <b>7</b>         |                  | 30               |
| 0.07                  | -       | 1 x 0.30             |  |   |                  |                  |                  |                  |                  |                  | 4                |                  | 10               | 20               | 40               |
| 0.09                  | 28      |                      |  |   |                  |                  |                  | <b>3</b>         |                  |                  |                  | <b>7</b>         | 12               |                  | 50               |
| 0.12                  | -       | 1 x 0.40             |  |   |                  |                  |                  |                  | 4                |                  | <b>7</b>         | 9                | 15               | 30               | 60               |
| 0.13                  | 26      |                      |  |   |                  |                  | 3                |                  |                  | <b>7</b>         |                  | 10               | 17               |                  |                  |
| 0.14                  | -       | 1 x 0.43             |  |   |                  |                  |                  |                  |                  |                  | 8                | 11               | 18               |                  | <b>70</b>        |
| 0.15                  | -       |                      |  |   |                  |                  |                  |                  | 5                |                  |                  | 12               | <b>19</b>        | 40               | 80               |
| 0.2                   | -       | 1 x 0.50             |  |   |                  |                  |                  | 4                |                  | 10               | 12               | 15               | 26               | 50               | 100              |
| 0.22                  | 24      | 1 x 0.52             |  |   |                  |                  | <b>3</b>         |                  | 7                | 11               | 13               | 17               | 28               |                  | 110              |
| 0.25                  | -       |                      | 7 x 0.22                                   |   |                  |                  |                  | 5                | 8                |                  | <b>14</b>        | <b>19</b>        | <b>30</b>        | <b>60</b>        | <b>130</b>       |
| 0.34                  | 22      | 1 x 0.67             |  |   |                  | <b>3</b>         | <b>5</b>         | <b>7</b>         | <b>11</b>        | 17               | 19               | 26               | <b>40</b>        | <b>90</b>        | 180              |
| 0.38                  | -       |                      |  |   |                  |                  |                  | 8                | <b>12</b>        | <b>19</b>        | 22               | 30               | 50               | <b>100</b>       | 200              |
| 0.5                   | -       | 1 x 0.80             |  | 19 x 0.18   |                  | 4                | <b>7</b>         | <b>10</b>        | <b>16</b>        | 25               | <b>28</b>        | 38               | <b>60</b>        | <b>130</b>       | <b>260</b>       |
| 0.6                   | 20      |                      | 4 x 0.43                                   | 3   | 5                |                  | <b>9</b>         | 12               | <b>19</b>        | 30               | 34               | 46               | 80               | 160              | 310              |
| 0.75                  | -       | 1 x 0.98             |  | 7 x 0.37  |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |
|                       |         |                      | 19 x 0.22                                  | 4   | 6                |                  | <b>11</b>        | 15               | <b>24</b>        | <b>37</b>        | <b>42</b>        | 56               | <b>100</b>       | <b>200</b>       | <b>390</b>       |
| 0.88                  | 18      |                      |  |   |                  | <b>7</b>         | <b>12</b>        | 18               | <b>26</b>        | 44               | 50               | 70               | 110              | 230              | 450              |
| 0.93                  | -       |                      |  |   | 5                |                  |                  | <b>19</b>        | 30               | 47               | 54               | 72               |                  | 240              | 470              |
| 1                     | -       | 1 x 1.13             |  | 7 x 0.43  |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |
|                       |         |                      | 19 x 0.26                                  |   |                  | <b>8</b>         | <b>14</b>        | 21               | <b>32</b>        | 50               | 57               | 77               | <b>120</b>       | <b>260</b>       | <b>520</b>       |
| 1.34                  | 16      |                      | 7 x 0.49                                   | 7   | 11               |                  | <b>19</b>        | <b>27</b>        | <b>41</b>        | 70               | 77               | 108              | 170              | 350              | 680              |
| 1.5                   | -       | 1 x 1.38             |  | 7 x 0.52  |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |
|                       |         |                      | 19 x 0.32                                  | 8   | <b>12</b>        | <b>21</b>        | <b>30</b>        | <b>48</b>        |                  | 77               | <b>84</b>        | 120              | <b>190</b>       | <b>390</b>       | <b>750</b>       |
| 2                     | 14      | 1 x 1.60             |  | 7 x 0.64  |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |
|                       |         |                      | 19 x 0.37                                  | 11  | <b>17</b>        | <b>27</b>        | <b>43</b>        | <b>65</b>        | 108              | <b>112</b>       | 168              | 290              | 550              | 1 080            |                  |
| 2.5                   | -       | 1 x 1.77             |  | 7 x 0.67  | 13               | <b>19</b>        | <b>35</b>        | <b>50</b>        | <b>80</b>        | 126              | <b>140</b>       | 192              | <b>320</b>       | <b>650</b>       | <b>1 280</b>     |
| 3                     | -       |                      |  |   | 16               | 24               | <b>45</b>        | 61               | 98               | 156              | 180              | 247              | 420              | 780              | 1 530            |
| -                     | 12      |                      | 37 x 0.34                                  | 17  | <b>26</b>        | <b>46</b>        | <b>66</b>        | <b>103</b>       | 168              | 192              | 266              | 450              | <b>840</b>       | 1 650            |                  |
| 4                     | -       | 1 x 2.24             |  | 7 x 0.85  | 21               | <b>32</b>        | <b>56</b>        | <b>80</b>        | <b>126</b>       | 204              | <b>224</b>       | 323              | 550              | <b>1 050</b>     | 2 060            |
| 5                     | -       |                      |  |   | 26               | 40               | <b>70</b>        | 105              | 168              | 264              | 300              | 399              | 680              | 1 330            | 2 610            |
| -                     | 10      |                      | 37 x 0.43                                  | 27  | <b>42</b>        | <b>77</b>        | <b>107</b>       | 171              | 266              | 304              | 418              | 700              | <b>1 370</b>     | <b>2 690</b>     |                  |
| 6                     | -       | 1 x 2.74             |  | 7 x 1.04  | 31               | <b>48</b>        | <b>84</b>        | <b>120</b>       | <b>192</b>       | 304              | <b>343</b>       | 475              | 800              | <b>1 540</b>     | 3 020            |
| -                     | 8       |                      |  |   | 43               | <b>66</b>        | <b>119</b>       | 171              | 266              | 418              | 481              | 666              | 1 130            | 2 200            | 4 320            |
| 10                    | -       |                      | 7 x 1.33                                   | 50  | <b>77</b>        | <b>140</b>       | 209              | <b>322</b>       | 518              | 592              | 814              | 1 380            | 2 700            | 5 300            |                  |
| -                     | 6       |                      |  | 68  | <b>105</b>       | 190              | 276              | 444              | 703              | 814              | 1 110            | 1 880            | 3 690            |                  |                  |
| 16                    | -       |                      | 7 x 1.68                                   |   |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |
|                       |         |                      | 19 x 1.04                                  | 77  |                  | <b>119</b>       | <b>224</b>       | 323              | <b>516</b>       | 814              | 925              | 1 258            | 2 130            | 4 180            |                  |
| -                     | 4       |                      |  |   | 108              | <b>168</b>       | <b>316</b>       | 444              | 703              | 1 110            | 1 295            | 1 739            | 2 940            | 5 770            |                  |
| 25                    | -       |                      | 7 strands                                  |   | 123              | <b>192</b>       | <b>354</b>       | 518              | <b>798</b>       | 1 295            | 1 480            | 2 013            | 3 400            |                  |                  |
| 35                    | 2       |                      | 7 strands                                  |   | 166              | <b>259</b>       | <b>495</b>       | 703              | <b>1 121</b>     | 1 739            | 2 013            | 2 684            | 4 540            |                  |                  |
| -                     | 1       |                      |  |   | 219              | <b>342</b>       | 608              | 888              | 1 406            | 2 196            | 2 501            | 3 355            | 5 670            |                  |                  |
| 50                    | -       |                      | 19 strands                                 |   | 237              | <b>370</b>       | <b>740</b>       | 1 036            | <b>1 628</b>     | 2 562            | 2 928            | 3 904            |                  |                  |                  |
| -                     | 1/0     |                      |  |   | 272              | <b>425</b>       |                  | 777              | 1 147            | 1 813            | 2 867            | 3 294            | 4 392            |                  |                  |
| 70                    | 2/0     |                      | 19 strands                                 |   | <b>333</b>       | <b>543</b>       | <b>1 036</b>     | 1 406            | <b>2 257</b>     | 3 477            | 3 965            | 5 307            |                  |                  |                  |
| -                     | 3/0     |                      |  |   | <b>432</b>       | 684              | 1 221            | 1 776            | 2 775            | 4 392            | 5 002            |                  |                  |                  |                  |
| 95                    | -       |                      | 19 strands                                 |   | <b>444</b>       | <b>740</b>       | <b>1 369</b>     | 1 813            | <b>2 979</b>     | 4 453            | 5 124            |                  |                  |                  |                  |
| -                     | 4/0     |                      |  |   | <b>546</b>       | 851              | 1 517            | 2 196            | 3 441            | 5 429            |                  |                  |                  |                  |                  |
| 120                   | -       |                      | 19 strands                                 |   | <b>568</b>       | <b>925</b>       | <b>1 776</b>     | 2 318            | <b>4 144</b>     |                  |                  |                  |                  |                  |                  |
| -                     | 250 MCM |                      |  |   | <b>645</b>       | 1 036            | 1 850            | 2 684            | 4 209            |                  |                  |                  |                  |                  |                  |
| 150                   | 300 MCM |                      | 19 strands                                 |   | <b>703</b>       | <b>1 184</b>     | <b>2 220</b>     | 2 867            | <b>4 880</b>     |                  |                  |                  |                  |                  |                  |
| 185                   | 350 MCM |                      | 37 strands                                 |   | <b>888</b>       | <b>1 443</b>     | <b>2 738</b>     | 3 660            | <b>5 856</b>     |                  |                  |                  |                  |                  |                  |
| -                     | 400 MCM |                      |  |   | <b>1 036</b>     | 1 628            | 2 928            | 4 270            |                  |                  |                  |                  |                  |                  |                  |
| 240                   | -       |                      | 37 strands                                 |   | <b>1 184</b>     | <b>1 924</b>     | <b>3 552</b>     | 4 758            |                  |                  |                  |                  |                  |                  |                  |
| -                     | 500 MCM |                      |  |   | <b>1 295</b>     | 2 035            | 3 626            | 5 246            |                  |                  |                  |                  |                  |                  |                  |
| 300                   | 600 MCM |                      | 61 strands                                 |   | <b>1 480</b>     | <b>2 368</b>     | 4 209            |                  |                  |                  |                  |                  |                  |                  |                  |
| -                     | 700 MCM |                      |  |   | 1 830            | 2 849            | 5 063            |                  |                  |                  |                  |                  |                  |                  |                  |
| 400                   | 750 MCM |                      | 61 strands                                 |   | <b>1 952</b>     | 3 050            | 5 429            |                  |                  |                  |                  |                  |                  |                  |                  |

As per standard IEC 60228 (or NF C 32-018):

Class 1 (or A)

Class 2 (or B)

Class 5 (or C)

Class 6 (or D)

Note: The nominal stranding compositions indicated in the table above (and in all pages of all OMERIN catalogues) are indicative.

The number and/or diameter of the strand(s) may vary within the limits defined by the applicable standard(s). Only the maximum linear resistance at 20°C is the guaranty of compliance with the standard.

Stranding compositions in bold are preferential; the others are given for informational purposes and are not available on standard products.

www.omerin.com

**omerin**  
LES CABLES DE L'EXTREME

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.

For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

® Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.

**Main properties  
of metals commonly used  
by OMERIN SAS:**

| Type of metal              | OMERIN name | Continuous operating temperature °C | Peak temperature °C | Melt temperature °C | Density at 20 °C g.cm <sup>-3</sup> | Volume electrical resistivity at 20 °C. µΩ.cm | Resistance variation coefficient (α) at 20 °C 10 <sup>-3</sup> .K <sup>-1</sup> | Thermal conductivity at 20 °C W.m <sup>-1</sup> .K <sup>-1</sup> | Specific heat capacity J.kg <sup>-1</sup> .K <sup>-1</sup> | Linear dilation coefficient from +20 °C to +100 °C 10 <sup>-6</sup> .K <sup>-1</sup> | Tensile strength Rm MPa |
|----------------------------|-------------|-------------------------------------|---------------------|---------------------|-------------------------------------|---|---|--|--|--|-------------------------|
| Bare copper                | CuA1        | 180                                 | 400                 | 1 083               | 8.89                                | 1.7241  | 3.93  | 389  | 385  | 16.8   | 230                     |
| Deoxidised bare copper     | CuC1        | 180                                 | 400                 | 1 083               | 8.89                                | 1.7241  | 3.93  | 389  | 385  | 16.8   | 230                     |
| Tin-plated copper          | CuSn        | 180                                 | 300                 | 1 083               | 8.89                                | 1.7654 to 1.8508                              | 3.66 to 3.84  | 386  | 385  | 16.8   | 230                     |
| Silver-plated copper       | CuAg        | 200                                 | 450                 | 1 083               | 8.91 to 9.05                        | 1.7241  | 3.93 to 3.95  | 389  | 385  | 16.8   | 230                     |
| Nickel-plated copper       | CuNi        | 300                                 | 500                 | 1 083               | 8.89                                | 1.7960  | 3.95  | 386  | 387  | 16.7   | 240                     |
| 27% nickel-plated copper   | CuNi27%     | 450                                 | 700                 | 1 083               | 8.89                                | 2.4284  | 4.22  | 359  | 404  | 15.8   | 240                     |
| Nickel                     | Ni          | 600                                 | 900                 | 1 455               | 8.9                                 | 9.1   | 5.37  | 70   | 456  | 13   | 400                     |
| Nickel Chrome 80/20        | NiCr80/20   | 1 000                               | 1 200               | 1 400               | 8.35                                | 108   | 0.06  | 11.3   | 450  | 17.5   | 800                     |
| Aluminium                  | Alu         | 120                                 | 200                 | 660                 | 2.7                                 | 2.8264  | 4.03  | 237  | 890  | 22   | 130                     |
| Galvanized steel           | Galva       | 600                                 | 900                 | 1 455               | 7.9                                 | 73  | 4   | 16.3   | 460  | 18   | 850                     |
| Stainless steel (AISI 304) | SS 304      | 600                                 | 900                 | 1 455               | 7.9                                 | 73  | 4   | 16.3   | 460  | 18   | 850                     |

**Maximum linear resistance  
of cores at 20°C  
As per IEC 60228**

| Maximum linear resistance of core at 20 °C (Ω/km) |  |      |                                   |  |        |                   |   |        |        |   |        |        |
|---|--|------|-----------------------------------|--|--------|-------------------|---|--------|--------|---|--------|--------|
| Nominal cross-section mm <sup>2</sup>             | Class 1<br>Bare strands<br>Strands coated with metal layer |      | Minimum number of strands in core | Class 2<br>Bare strands<br>Strands coated with metal layer |        | Aluminium strands | Class 5<br>Max. strand diameter in core (mm)<br>Bare strands<br>Strands coated with metal layer |        |        | Class 6<br>Max. strand diameter in core (mm)<br>Bare strands<br>Strands coated with metal layer |        |        |
|   |  |      |                                   |  |        |                   |   |        |        |   |        |        |
| 0.5   | 36.0   | 36.7 | 7                                 | 36.0   | 36.7   | -                 | 0.21  | 39.0   | 40.1   | 0.16  | 39.0   | 40.1   |
| 0.75  | 24.5   | 24.8 | 7                                 | 24.5   | 24.8   | -                 | 0.21  | 26.0   | 26.7   | 0.16  | 26.0   | 26.7   |
| 1   | 18.1   | 18.2 | 7                                 | 18.1   | 18.2   | -                 | 0.21  | 19.5   | 20.0   | 0.16  | 19.5   | 20.0   |
| 1.5   | 12.1   | 12.2 | 7                                 | 12.1   | 12.2   | -                 | 0.26  | 13.3   | 13.7   | 0.16  | 13.3   | 13.7   |
| 2.5   | 7.41   | 7.56 | 7                                 | 7.41   | 7.56   | -                 | 0.26  | 7.98   | 8.21   | 0.16  | 7.98   | 8.21   |
| 4   | 4.61   | 4.70 | 7                                 | 4.61   | 4.70   | -                 | 0.31  | 4.95   | 5.09   | 0.16  | 4.95   | 5.09   |
| 6   | 3.08   | 3.11 | 7                                 | 3.08   | 3.11   | -                 | 0.31  | 3.30   | 3.39   | 0.21  | 3.30   | 3.39   |
| 10  | 1.83   | 1.84 | 7                                 | 1.83   | 1.84   | 3.08              | 0.41  | 1.91   | 1.95   | 0.21  | 1.91   | 1.95   |
| 16  | 1.15   | 1.16 | 7                                 | 1.15   | 1.16   | 1.91              | 0.41  | 1.21   | 1.24   | 0.21  | 1.21   | 1.24   |
| 25  | -  | -    | 7                                 | 0.727  | 0.734  | 1.20              | 0.41  | 0.780  | 0.795  | 0.21  | 0.780  | 0.795  |
| 35  | -  | -    | 7                                 | 0.524  | 0.529  | 0.868             | 0.41  | 0.554  | 0.565  | 0.21  | 0.554  | 0.565  |
| 50  | -  | -    | 19                                | 0.387  | 0.391  | 0.641             | 0.41  | 0.386  | 0.393  | 0.31  | 0.386  | 0.393  |
| 70  | -  | -    | 19                                | 0.268  | 0.270  | 0.443             | 0.51  | 0.272  | 0.277  | 0.31  | 0.272  | 0.277  |
| 95  | -  | -    | 19                                | 0.193  | 0.195  | 0.320             | 0.51  | 0.206  | 0.210  | 0.31  | 0.206  | 0.210  |
| 120   | -  | -    | 37                                | 0.153  | 0.154  | 0.253             | 0.51  | 0.161  | 0.164  | 0.31  | 0.161  | 0.164  |
| 150   | -  | -    | 37                                | 0.124  | 0.126  | 0.206             | 0.51  | 0.129  | 0.132  | 0.31  | 0.129  | 0.132  |
| 185   | -  | -    | 37                                | 0.0991   | 0.100  | 0.164             | 0.51  | 0.106  | 0.108  | 0.41  | 0.106  | 0.108  |
| 240   | -  | -    | 37                                | 0.0754   | 0.0762 | 0.125             | 0.51  | 0.0801 | 0.0817 | 0.41  | 0.0801 | 0.0817 |
| 300   | -  | -    | 61                                | 0.0601   | 0.0607 | 0.100             | 0.51  | 0.0641 | 0.0654 | 0.41  | 0.0641 | 0.0654 |
| 400   | -  | -    | 61                                | 0.0470   | 0.0475 | 0.0778            | 0.51  | 0.0486 | 0.0495 | -   | -      | -      |



**Maximum linear resistance  
of cores at 20°C**  
**As per NF C 32-018**

| Maximum linear resistance of core at 20 °C<br>(Ω/km) |                         |                                      |                       |                              |                         |                                      |                                      |                       |                              |                         |  |                                      |                       |                          |
|--|-------------------------|--------------------------------------|-----------------------|------------------------------|-------------------------|--------------------------------------|--------------------------------------|-----------------------|------------------------------|-------------------------|--|--------------------------------------|-----------------------|--------------------------|
| Nominal<br>cross-section<br>mm²                      | Class A                 |                                      |                       |                              | Class B                 |                                      |                                      |                       |                              | Class C                 |  |                                      |                       |                          |
|  | Indicative<br>stranding | Bare or silver-<br>coated<br>strands | Tin-plated<br>strands | Nickel-<br>plated<br>strands | Indicative<br>stranding | Min. number<br>of strands<br>in core | Bare or silver-<br>coated<br>strands | Tin-plated<br>strands | Nickel-<br>plated<br>strands | Indicative<br>stranding | Max. strand<br>diameter<br>in core<br>(mm) | Bare or silver-<br>coated<br>strands | Tin-plated<br>strands | Nickel-plated<br>strands |
| 0.03   | 1 x 0.20                | 599                                  | 616                   | 662                          | -                       | -                                    | -                                    | -                     | -                            | -                       | -  | -                                    | -                     | -                        |
| 0.05   | 1 x 0.25                | 384                                  | 394                   | 424                          | -                       | -                                    | -                                    | -                     | -                            | -                       | -  | -                                    | -                     | -                        |
| 0.055  | -                       | -                                    | -                     | -                            | 7 x 0.10                | 7                                    | 373                                  | 391                   | 419                          | -                       | -  | -                                    | -                     | -                        |
| 0.06   | -                       | -                                    | -                     | -                            | -                       | -                                    | -                                    | -                     | -                            | 15 x 0.07               | 0.08                                       | 356                                  | 372                   | 399                      |
| 0.08   | 1 x 0.32                | 230                                  | 234                   | 252                          | 7 x 0.12                | 7                                    | 252                                  | 259                   | 279                          | 10 x 0.10               | 0.11                                       | 261                                  | 274                   | 293                      |
| 0.12   | 1 x 0.40                | 146                                  | 148                   | 160                          | 7 x 0.15                | 7                                    | 161                                  | 166                   | 178                          | 15 x 0.10               | 0.11                                       | 174                                  | 182                   | 195                      |
| 0.15   | -                       | -                                    | -                     | -                            | -                       | -                                    | -                                    | -                     | -                            | 19 x 0.10               | 0.11                                       | 136                                  | 143                   | 153                      |
| 0.20   | 1 x 0.50                | 93.1                                 | 95.0                  | 102                          | -                       | -                                    | -                                    | -                     | -                            | -                       | -  | -                                    | -                     | -                        |
| 0.22   | -                       | -                                    | -                     | -                            | 7 x 0.20                | 7                                    | 89.9                                 | 92.5                  | 99.4                         | 19 x 0.12               | 0.13                                       | 92.0                                 | 94.6                  | 102                      |
| 0.28   | 1 x 0.60                | 64.7                                 | 65.9                  | 71.0                         | -                       | -                                    | -                                    | -                     | -                            | -                       | -  | -                                    | -                     | -                        |
| 0.34   | -                       | -                                    | -                     | -                            | 7 x 0.25                | 7                                    | 57.5                                 | 59.2                  | 63.6                         | 19 x 0.15               | 0.16                                       | 58.9                                 | 60.6                  | 65.1                     |
| 0.40   | -                       | -                                    | -                     | -                            | -                       | -                                    | -                                    | -                     | -                            | 12 x 0.20               | 0.21                                       | 52.4                                 | 53.9                  | 58.0                     |
| 0.50   | 1 x 0.80                | 36.0                                 | 36.7                  | 39.5                         | 7 x 0.30                | 7                                    | 39.6                                 | 40.7                  | 43.8                         | 16 x 0.20               | 0.21                                       | 39.0                                 | 40.1                  | 43.1                     |
| 0.60   | -                       | -                                    | -                     | -                            | -                       | -                                    | -                                    | -                     | -                            | 19 x 0.20               | 0.21                                       | 32.8                                 | 33.7                  | 36.3                     |
| 0.64   | 1 x 0.90                | 28.5                                 | 29.0                  | 31.2                         | -                       | -                                    | -                                    | -                     | -                            | -                       | -  | -                                    | -                     | -                        |
| 0.75   | -                       | -                                    | -                     | -                            | -                       | -                                    | -                                    | -                     | -                            | 24 x 0.20               | 0.21                                       | 26.0                                 | 26.7                  | 28.7                     |
| 0.80   | 1 x 1.00                | 23.1                                 | 23.3                  | -                            | -                       | -                                    | -                                    | -                     | -                            | -                       | -  | -                                    | -                     | -                        |
| 0.93   | -                       | -                                    | -                     | -                            | 19 x 0.25               | 19                                   | 21.0                                 | 21.6                  | 23.2                         | -                       | -  | -                                    | -                     | -                        |
| 1.00   | 1 x 1.13                | 18.1                                 | 18.2                  | -                            | -                       | -                                    | -                                    | -                     | -                            | 32 x 0.20               | 0.21                                       | 19.5                                 | 20.0                  | 21.5                     |
| 1.13   | 1 x 1.20                | 16.0                                 | 16.2                  | -                            | -                       | -                                    | -                                    | -                     | -                            | -                       | -  | -                                    | -                     | -                        |
| 1.34   | -                       | -                                    | -                     | -                            | 19 x 0.30               | 19                                   | 14.6                                 | 15.0                  | 16.1                         | -                       | -  | -                                    | -                     | -                        |
| 1.50   | -                       | -                                    | -                     | -                            | -                       | -                                    | -                                    | -                     | -                            | 30 x 0.25               | 0.26                                       | 13.3                                 | 13.7                  | 14.7                     |
| 1.91   | -                       | -                                    | -                     | -                            | 27 x 0.30               | 27                                   | 10.3                                 | 10.6                  | 11.3                         | -                       | -  | -                                    | -                     | -                        |
| 2.61   | -                       | -                                    | -                     | -                            | 37 x 0.30               | 37                                   | 7.49                                 | 7.70                  | 8.28                         | -                       | -  | -                                    | -                     | -                        |

| Maximum linear resistance of core at 20 °C<br>(Ω/km) |                         |  |                                      |                       |                          |
|--|-------------------------|--|--------------------------------------|-----------------------|--------------------------|
| Nominal<br>cross-section<br>mm²                      | Class D                 |  |                                      |                       |                          |
|  | Indicative<br>stranding | Max. strand<br>diameter<br>in core<br>(mm) | Bare or silver-<br>coated<br>strands | Tin-plated<br>strands | Nickel-plated<br>strands |
| 0.03   | -                       | -  | -                                    | -                     | -                        |
| 0.05   | -                       | -  | -                                    | -                     | -                        |
| 0.055  | 27 x 0.05               | 0.06                                       | 387                                  | 405                   | 434                      |
| 0.06   | -                       | -  | -                                    | -                     | -                        |
| 0.08   | 19 x 0.07               | 0.08                                       | 281                                  | 294                   | 315                      |
| 0.12   | 30 x 0.07               | 0.08                                       | 178                                  | 186                   | 199                      |
| 0.15   | 37 x 0.07               | 0.08                                       | 143                                  | 149                   | 160                      |
| 0.20   | -                       | -  | -                                    | -                     | -                        |
| 0.22   | 27 x 0.10               | 0.11                                       | 95.9                                 | 100                   | 108                      |
| 0.28   | -                       | -  | -                                    | -                     | -                        |
| 0.34   | 30 x 0.12               | 0.13                                       | 58.3                                 | 59.9                  | 64.4                     |
| 0.40   | -                       | -  | -                                    | -                     | -                        |
| 0.50   | 28 x 0.15               | 0.16                                       | 39.6                                 | 40.7                  | 43.8                     |
| 0.60   | -                       | -  | -                                    | -                     | -                        |
| 0.64   | -                       | -  | -                                    | -                     | -                        |
| 0.75   | 42 x 0.15               | 0.16                                       | 26.4                                 | 27.1                  | 29.2                     |
| 0.80   | -                       | -  | -                                    | -                     | -                        |
| 0.93   | -                       | -  | -                                    | -                     | -                        |
| 1.00   | 56 x 0.15               | 0.16                                       | 19.8                                 | 20.4                  | 21.9                     |
| 1.13   | -                       | -  | -                                    | -                     | -                        |
| 1.34   | -                       | -  | -                                    | -                     | -                        |
| 1.50   | 83 x 0.15               | 0.16                                       | 13.3                                 | 13.7                  | 14.8                     |
| 1.91   | -                       | -  | -                                    | -                     | -                        |
| 2.61   | -                       | -  | -                                    | -                     | -                        |

**Maximum linear resistance  
of cores at 20°C**

*As per UL 1581*

| Nominal<br>cross-section<br>(mm²) | Maximum linear resistance of core at 20 °C<br>(Ω/km)           |  |   |
|-----------------------------------|--|--|---|
|                                   | Single-strand bare<br>copper conductor<br>UL 1581 - Table 30.1 | Single-strand tin-plated<br>copper conductor<br>UL 1581 - Table 30.2 | Multi-strand bare<br>copper conductor<br>UL 1581 - Table 30.3 |
| 30 AWG                            | 347  | 361  | 354   |
| 29 AWG                            | 271  | 282  | 277   |
| 28 AWG                            | 218  | 227  | 223   |
| 27 AWG                            | 172  | 179  | 175   |
| 26 AWG                            | 138  | 143  | 140   |
| 25 AWG                            | 108  | 112  | 111   |
| 24 AWG                            | 85.9   | 89.3   | 87.6  |
| 23 AWG                            | 67.9   | 70.6   | 69.2  |
| 22 AWG                            | 54.3   | 56.4   | 55.4  |
| 21 AWG                            | 42.7   | 44.4   | 43.6  |
| 20 AWG                            | 33.9   | 35.2   | 34.6  |
| 19 AWG                            | 26.9   | 28.0   | 27.4  |
| 18 AWG                            | 21.4   | 22.2   | 21.8  |
| 17 AWG                            | 16.9   | 17.6   | 17.3  |
| 16 AWG                            | 13.5   | 14.0   | 13.7  |
| 15 AWG                            | 10.6   | 11.1   | 10.9  |
| 14 AWG                            | 8.45   | 8.78   | 8.62  |
| 13 AWG                            | 6.69   | 6.97   | 6.82  |
| 12 AWG                            | 5.31   | 5.53   | 5.43  |
| 11 AWG                            | 4.22   | 4.39   | 4.30  |
| 10 AWG                            | 3.343  | 3.476  | 3.409   |
| 9 AWG                             | 2.652  | 2.730  | 2.705   |
| 8 AWG                             | 2.102  | 2.163  | 2.144   |
| 7 AWG                             | 1.667  | 1.716  | 1.700   |
| 6 AWG                             | 1.323  | 1.361  | 1.348   |
| 5 AWG                             | 1.049  | 1.079  | 1.070   |
| 4 AWG                             | 0.8315   | 0.8559   | 0.8481  |
| 3 AWG                             | 0.6595   | 0.6788   | 0.6727  |
| 2 AWG                             | 0.5231   | 0.5384   | 0.5335  |
| 1 AWG                             | 0.4146   | 0.4268   | 0.4230  |
| 1/0 AWG                           | 0.3287   | 0.3367   | 0.3354  |
| 2/0 AWG                           | 0.2608   | 0.2670   | 0.2660  |
| 3/0 AWG                           | 0.2069   | 0.2119   | 0.2110  |
| 4/0 AWG                           | 0.1640   | 0.1680   | 0.1673  |
| 250 kcmil                         | -  | -  | 0.1416  |
| 300 kcmil                         | -  | -  | 0.1180  |
| 350 kcmil                         | -  | -  | 0.1011  |
| 400 kcmil                         | -  | -  | 0.08851   |
| 450 kcmil                         | -  | -  | 0.07867   |
| 500 kcmil                         | -  | -  | 0.7080  |
| 550 kcmil                         | -  | -  | 0.06436   |
| 600 kcmil                         | -  | -  | 0.05900   |
| 650 kcmil                         | -  | -  | 0.05447   |
| 700 kcmil                         | -  | -  | 0.05057   |
| 750 kcmil                         | -  | -  | 0.04721   |
| 800 kcmil                         | -  | -  | 0.04425   |
| 900 kcmil                         | -  | -  | 0.03933   |
| 1000 kcmil                        | -  | -  | 0.03540   |

| Conductor metal                | Strand diameter<br>(mm) | Correction coefficient<br>Kc |
|--------------------------------|-------------------------|------------------------------|
| CuAl<br>(as per ASTM B 3)      | -                       | 1                            |
| CuAg<br>(as per ASTM B 298)    | -                       | 1                            |
| CuSn<br>(as per ASTM B 33)     | 0.076 ≤ Ø < 0.28        | 0.9315                       |
|                                | 0.28 ≤ Ø < 0.51         | 0.9416                       |
|                                | 0.51 ≤ Ø < 2.6          | 0.9616                       |
|                                | 2.6 ≤ Ø < 7.4           | 0.9716                       |
|                                | 7.4 ≤ Ø < 11.7          | 0.9766                       |
| CuNi<br>(as per ASTM B 355)    | -                       | 0.96                         |
| CuNi27%<br>(as per ASTM B 355) | -                       | 0.71                         |

To determine the maximum linear resistance at 20 °C of the cores made of the metals above, the following formula is applied:

$$R_{linmax\ metal} = R_{linmax\ CuAl} / K_c$$

**Main properties  
of insulation materials commonly  
used by OMERIN SAS:**

| Properties  | Polyvinyl<br>chloride | low<br>density | Polyethylene<br>high<br>density | Chemically<br>cross-linked | Halogen-free<br>polyolefine | Polyurethane | Ethylene<br>tetrafluoro-<br>ethylene | Fluorethylene<br>propylene | Perfluoro-<br>alkoxy<br>alkane | Polytetrafluoro-<br>ethylene | Polyimide | Silicone<br>rubber | VARPREN®     |
|---|-----------------------|----------------|---------------------------------|----------------------------|-----------------------------|--------------|--------------------------------------|----------------------------|--------------------------------|------------------------------|-----------|--------------------|--------------|
|   | PVC                   | LDPE           | HDPE                            | XLPE                       | HFRR                        | PUR          | ETFE                                 | FEP                        | PFA                            | PTFE                         | PI        | SIR                | VARPREN®     |
| <b>Physical</b>                                     |                       |                |                                 |                            |                             |              |                                      |                            |                                |                              |           |                    |              |
| Operating temperature:                              |                       |                |                                 |                            |                             |              |                                      |                            |                                |                              |           |                    |              |
| - at low temperature (°C)                           | -30                   | -50            | -50                             | -50                        | -30                         | -50          | -90                                  | -90                        | -90                            | -90                          | -90       | -60                | -30          |
| - in continuous operating service (°C)              | +105                  | +70            | +80                             | +90                        | +105                        | +120         | +150                                 | +205                       | +260                           | +260                         | +260      | +180               | +155         |
| - in short circuit state (°C)                       | +160                  | +150           | +180                            | +250                       | +160                        | +180         | +200                                 | +250                       | +300                           | +300                         | +350      | +350               | +200         |
| Density (g/cm <sup>3</sup> )                        | 1.23 to 1.50          | 0.91           | 0.93                            | 0.91                       | 1.5                         | 1.11 to 1.18 | 1.75                                 | 2.15                       | 2.15                           | 2.15                         | 1.67      | 1.20 to 1.50       | 1.45 to 1.57 |
| <b>Electrical</b>                                   |                       |                |                                 |                            |                             |              |                                      |                            |                                |                              |           |                    |              |
| Dielectric strength (kV/mm)                         | 30                    | 20             | 20                              | 25                         | 20                          | 20           | 36                                   | 24                         | 25                             | 25                           | 28        | 25                 | 15           |
| Electrical resistance (Ω.cm)                        | 1 016                 | 1 017          | 1 017                           | 1 017                      | 1 015                       | 1 015        | 1 016                                | 1 018                      | 1 018                          | 1 018                        | 1 015     | 1 015              | 1 014        |
| Relative permittivity at industrial frequency       | 8                     | 2.3            | 2.3                             | 2.5                        | 3.6                         | 6            | 2.6                                  | 2.1                        | 2.05                           | 2                            | 2.7       | 3.22 to 3.67       | 5            |
| tan δ at industrial frequency (x 10 <sup>-4</sup> ) | 1 000                 | 10             | 10                              | 40                         | 20                          | 300          | 2                                    | 3                          | 2                              | 2                            | 13        | 37 to 258          | 200          |
| <b>Chemical</b>                                     |                       |                |                                 |                            |                             |              |                                      |                            |                                |                              |           |                    |              |
| Resistance to weak acids                            | Very good             | Very good      | Very good                       | Very good                  | Fair                        | Very good    | Very good                            | Very good                  | Very good                      | Very good                    | Very good | Good               | Good         |
| Resistance to weak alkalis                          | Very good             | Very good      | Very good                       | Very good                  | Fair                        | Very good    | Very good                            | Very good                  | Very good                      | Very good                    | Good      | Good               | Good         |
| <b>Mechanical</b>                                   |                       |                |                                 |                            |                             |              |                                      |                            |                                |                              |           |                    |              |
| Flexibility   | Good                  | Medium         | Poor                            | Medium                     | Poor                        | Good         | Medium                               | Medium                     | Good                           | Poor                         | Medium    | Excellent          | Excellent    |
| Resistance to abrasion.                             | Good                  | Medium         | Good                            | Good                       | Good                        | Excellent    | Excellent                            | Medium                     | Good                           | Good                         | Excellent | Good               | Good         |
| Tensile strength (MPa)                              | 15                    | 10             | 20                              | 22                         | 12                          | 50           | 45                                   | 20                         | 27.5                           | 40                           | 18        | 5                  | 6            |
| Elongation at break (%)                             | 250                   | 400            | 500                             | 300                        | 180                         | 350          | 200                                  | 250                        | 300                            | 350                          | 70        | 200                | 300          |
| <b>Other</b>  |                       |                |                                 |                            |                             |              |                                      |                            |                                |                              |           |                    |              |
| Flame resistance                                    | Medium                | Poor           | Poor                            | Poor                       | Excellent                   | Medium       | Excellent                            | Excellent                  | Excellent                      | Excellent                    | Excellent | Good               | Good         |
| Halogen-free  | No                    | Yes            | Yes                             | Yes                        | Yes                         | Yes          | No                                   | No                         | No                             | No                           | No        | Yes                | Yes          |
| Thermal resistivity (K.m/W)                         | 5                     | 3.5            | 3.5                             | 3.5                        | 5                           | 5            | 4.4                                  | 5                          | 4.4                            | 4.5                          | 5         | 5                  | 5            |
| Steam resistance                                    | Poor                  | Poor           | Poor                            | Fair                       | Poor                        | Poor         | Good                                 | Excellent                  | Excellent                      | Excellent                    | Fair      | Good               | Poor         |

Note: The information given above is purely indicative and testing under operating conditions as close as possible to reality is preferable.  
In no event shall OMERIN be held liable. Our technical departments are at your service to provide any clarifications required.

**Resistance fluorinated insulation  
to chemical products**


|  | FEP and PTFE  | PFA       | ETFE   |
|--|---|-----------|--|
| Hydrocarbons (oils, petrol, greases, etc.) | Excellent   | Excellent | Excellent  |
| Weak acids                                 | Excellent   | Excellent | Excellent  |
| Strong acids                               | Excellent   | Excellent | Very good<br>(except for highly oxidant acids when boiling)    |
| Weak alkalis                               | Excellent   | Excellent | Excellent  |
| Strong alkalis                             | Very good<br>(except hot alkaline metals)   | Excellent | Very good<br>(except very strong alkalis at high temperatures) |
| Organic solvents                           | Very good except some halogenated solvents<br>that may cause softening at high temperature<br>and pressure. | Excellent | Excellent  |

Fluorinated insulation materials are known to be highly resistant to chemical products such as solvents or hydrocarbons, but they are also capable of resisting all other types of aggressive or corrosive environments.  
The table below indicates the degrees of resistance of fluorinated insulation materials to chemical products with varying corrosive properties. For further information about fluorinated insulation materials, contact our technical department.

## Thermal classification of insulations

### Temperature class

• Y: 90 °C • A: 105 °C • E: 120 °C • B: 130 °C • F: 155 °C • H: 180 °C • C: > 180 °C

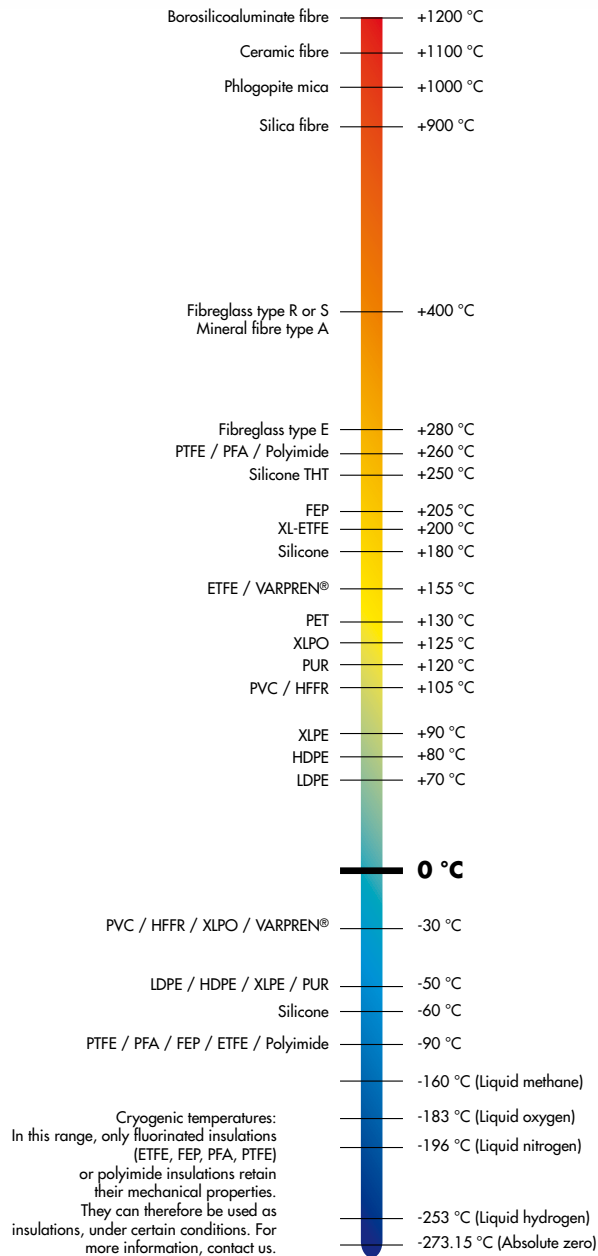

## General

### Introduction

The heat produced by the Joule effect when a current flows through the conductor core, is conducted by the various external insulating layers to be finally dissipated by the external cable environment.

This dissipation of heat via the external environment of the cable is done either by:

- convection and radiation if the cable is installed in the open air.
- conduction if the cable is in contact with other elements or materials.

When the thermal losses produced are equal to the thermal losses dissipated in the surrounding medium, a state of balance is achieved, characterised by a constant core temperature (steady state). This temperature must not exceed the maximum supported by the insulation, to ensure the cable has an optimum lifetime.

The maximum permissible current under continuous operation is the current strength value which, for a clearly defined cable environment, provokes the heating of the conductor cores to the maximum permitted value.

### Calculations of permissible current as per IEC 60287

#### Title of IEC 60287

"Calculation of the continuous current rating of cables (100% load factor)"

#### Field of application of IEC 60287

This standard only concerns the permanent use operation of cables for all alternating and direct voltages up to 5 kV, buried directly underground, installed in liners, gutters or steel tubes, as well as cables installed in the open air. In IEC 60287, "permanent use" is understood to mean the continuous circulation of a sufficient constant current (load factor 100%) to asymptotically achieve the maximum conductor temperature, assuming that the conditions of the ambient environment remain unchanged.

#### Basic assumptions for calculating permissible currents under IEC 60287

- Copper or aluminium core(s).
- Insulation class "maximum temperature resistance of insulation"
- Insulated cable in open air resting on supports or flanges.
- Outer cable diameter less than 150 mm.
- Cable protected from direct sunlight.
- AC (F = 50 Hz) or DC  $\leq 5000$  V.
- Suitable thermal dissipation and ventilation in the immediate vicinity of the cable.
- No external heat sources in the immediate vicinity of the cable.

#### Observations

The values indicated in the tables, graphs or calculations are indicative and theoretical.

They must only be used as estimations or as a starting point for a more detailed experimentation plan.

Indeed, these values can vary significantly according to core stranding options, the type of insulation, the number of conductors, the environmental conditions, the conditions of installation, etc.

Our technical departments are at your service for further and more detailed analyses.



## Complements

### Correction factors

The calculations of maximum permissible current strength according to IEC 60287 result in graph curves that can be downloaded directly from our website, [www.omerin.com](http://www.omerin.com). Today a large majority of OMERIN products have their own maximum permissible current graphs. However, if you are unable to find the right one or access the graphs, please contact us.

These graphs are given for specific cable installation conditions (blue box on upper right of graph: see basic assumptions on previous page). For other conditions of installation, you may apply the correction factors given below.

To select the correct dimensioning of your cables, apply the following formula and select the dimensions according to the correction:

$$I_{\text{corrected}} = (I_{\text{application}} / K) / (\text{number of cables per phase})$$

### Correction factors for several single-core cables or multicore cables

| Layout of<br>sealed cables   | Correction factors                   |      |      |      |      |      |      |      |      |      |      |
|--|--------------------------------------|------|------|------|------|------|------|------|------|------|------|
|  | Number of single or multicore cables |      |      |      |      |      |      |      |      |      |      |
| Enclosed   | 2                                    | 3    | 4    | 5    | 6    | 7    | 8    | 9    | 12   | 16   | 20   |
| Single layer<br>on walls or floors<br>or non-perforated trays      | 0.8                                  | 0.7  | 0.65 | 0.6  | 0.55 | 0.55 | 0.5  | 0.5  | 0.45 | 0.4  | 0.4  |
| Single layer<br>on ceiling   | 0.85                                 | 0.79 | 0.75 | 0.73 | 0.72 | 0.72 | 0.71 | 0.7  | 0.7  | 0.7  | 0.7  |
| Single layer on<br>perforated horizontal<br>or vertical trays      | 0.85                                 | 0.76 | 0.72 | 0.69 | 0.67 | 0.66 | 0.65 | 0.64 | 0.64 | 0.64 | 0.64 |
| Single layer on cable<br>raceways, gutters,<br>welded frames, etc. | 0.88                                 | 0.82 | 0.77 | 0.75 | 0.73 | 0.73 | 0.72 | 0.72 | 0.72 | 0.72 | 0.72 |
|  | 0.88                                 | 0.82 | 0.8  | 0.8  | 0.79 | 0.79 | 0.78 | 0.78 | 0.78 | 0.78 | 0.78 |

### Correction factors for installation in several layers

|                  |   |     |      |     |     |      |      |      |      |
|------------------|---|-----|------|-----|-----|------|------|------|------|
| Number of layers | 1 | 2   | 3    | 4   | 5   | 6    | 7    | 8    | >9   |
| Coefficient      | 1 | 0.8 | 0.73 | 0.7 | 0.7 | 0.68 | 0.68 | 0.68 | 0.66 |

# Equivalences between standards

## FIRE RESISTANCE

|                          | NF       | EN    | IEC      |   |
|--------------------------|----------|-------|----------|---|
| Circuit integrity        |          |       | 60331-1  | Test method for fire with shock at a temperature of at least 830 °C for cables of rated voltage up to and including 0.6/1.0 kV and with an overall diameter exceeding 20 mm     |
|                          |          |       | 60331-2  | Test method for fire with shock at a temperature of at least 830 °C for cables of rated voltage up to and including 0.6/1.0 kV and with an overall diameter not exceeding 20 mm |
|                          |          |       | 60331-3  | Test method for fire with shock at a temperature of at least 830 °C for cables of rated voltage up to and including 0.6/1.0 kV tested in a metal enclosure                      |
|                          |          |       | 60331-11 | Apparatus - Fire alone at a flame temperature of at least 750 °C  |
|                          |          |       | 60331-21 | Procedures and requirements - Cables of rated voltage up to and including 0.6/1.0 kV  |
|                          |          |       | 60331-23 | Procedures and requirements - Electric data cables  |
|                          |          |       | 60331-25 | Procedures and requirements - Optical fibre cables  |
| CR1 test                 | C 32-070 |       |          | Tests for classification of conductors and cables with respect to their fire behaviour  |
| Test on small conductors | C 32-076 | 50200 |          | Method of test for resistance to fire of unprotected small cables for use in emergency circuits   |
| Test on large conductors | C 32-077 | 50362 |          | Method of test for resistance to fire of larger unprotected power and control cables for use in emergency circuits  |

## FLAME PROPAGATION

### Cable alone:

|                                   |              |           |           |  |
|-----------------------------------|--------------|-----------|-----------|--|
| Vertical flame                    | C 32-078-1-1 | 60332-1-1 | 60332-1-1 | Test for a vertical flame propagation for a single insulated wire or cable - Apparatus   |
|                                   | C 32-078-1-2 | 60332-1-2 | 60332-1-2 | Test for vertical flame propagation for a single insulated wire or cable - Procedure for 1 kV pre-mixed flame                        |
|                                   | C 32-078-1-3 | 60332-1-3 | 60332-1-3 | Test for vertical flame propagation for a single insulated wire or cable - Procedure for determination of flaming droplets/particles |
| C2 test                           | C 32-070     |           |           | Tests for classification of conductors and cables with respect to their fire behaviour   |
| Vertical flame on small conductor | C 32-078-2-1 | 60332-2-1 | 60332-2-1 | Test for vertical flame propagation for a single small insulated wire or cable - Apparatus   |
|                                   | C 32-078-2-2 | 60332-2-2 | 60332-2-2 | Test for vertical flame propagation for a single small insulated wire or cable - Procedure for diffusion flame                       |

### Bunched cable:

|  |               |            |            |   |
|--|---------------|------------|------------|---|
|  | C 32-078-3-10 | 60332-3-10 | 60332-3-10 | Test for vertical flame spread of vertically-mounted bunched wires or cables - Apparatus      |
|  | C 32-078-3-21 | 60332-3-21 | 60332-3-21 | Test for vertical flame spread of vertically-mounted bunched wires or cables - Category A F/R |
|  | C 32-078-3-22 | 60332-3-22 | 60332-3-22 | Test for vertical flame spread of vertically-mounted bunched wires or cables - Category A     |
|  | C 32-078-3-23 | 60332-3-23 | 60332-3-23 | Test for vertical flame spread of vertically-mounted bunched wires or cables - Category B     |
|  | C 32-078-3-24 | 60332-3-24 | 60332-3-24 | Test for vertical flame spread of vertically-mounted bunched wires or cables - Category C     |
|  | C 32-078-3-25 | 60332-3-25 | 60332-3-25 | Test for vertical flame spread of vertically-mounted bunched wires or cables - Category D     |

## FIRE PROPAGATION

|         |          |  |  |   |
|---------|----------|--|--|---|
| C1 test | C 32-070 |  |  | Tests to classify conductors and cables according to their fire behaviour - C1 test |
|---------|----------|--|--|---|

## SMOKE DENSITY

|            |         |         |  |
|------------|---------|---------|--|
| C 32-073-1 | 61034-1 | 61034-1 | Test apparatus   |
| C 32-073-2 | 61034-2 | 61034-2 | Test procedure and requirements  |
| X 10-702-1 |         |         | Determination of the opacity of the fumes in an atmosphere without air renewal - Apparatus   |
| X 10-702-2 |         |         | Determination of the opacity of the fumes in an atmosphere without air renewal - Test method |

## COMBUSTION GASES

|            |         |         |   |
|------------|---------|---------|---|
| C 32-074-1 | 60754-1 | 60754-1 | Determination of halogen acid gas content   |
| C 32-074-2 | 60754-2 | 60754-2 | Determination of acidity (by pH measurement) and conductivity   |
| X 70-100   |         |         | Analysis of pyrolysis and combustion gases - Tubular furnace method   |
| X 70-101   |         |         | Analysis of pyrolysis and combustion gases - Smoke chamber method   |
| C 20-453   |         |         | Conventional determination of smoke corrosiveness   |
| C 20-454   |         |         | Analysis and titrations of gases evolved during pyrolysis or combustion of materials used in electrotechnical systems |



## EUROCLASSES

**The new European reaction-to-fire classification<sup>(1)</sup> for cables as per the Construction Products Regulation (CPR): "EUROCLASSES"**

Faced with all fire risks, in 2006 the European Union decided to include cables in the Construction Products Directive (CPD). A classification of fire reaction characteristics of cables was published in the Official Journal of the European Union on 27 October 2006 to endorse this decision. These Euroclasses relate to both power and communication cables, in all types of building - residential, commercial and industrial. The new classification represents significant progress for the safety of people and property, as it considers the overall performance of cables in a fire.

### MORE ACCURATE CLASSIFICATION

Table 52A in standard NF C 15-100 currently lists the conductors and cables commonly used in an electrical installation. The table indicates especially the fire reaction characteristics for each cable (C1, C2 or C3). This French classification is set out by the Order of 21 July 1994 which, apart from the classes, lays down the certificate of compliance of the fire performance of electric conductors and cables. It is going to be replaced gradually by the European classification that will have seven classes: A, B1, B2, C, D, E and F, A is the most demanding level.

The public authorities must adapt the French regulations to the European requirements and amend the Order of 21 July 1994 to apply this new classification in France. The regulations on different types of building will then be reviewed to clarify the application of the Euroclasses. The Euroclasses will take time to become applicable. The tests on cables in terms of their fire performance must first be harmonised at European level. Several standards have therefore been prepared:

- Standard EN 50399, which defines the new test methods that supplement certain methods already in existence.
- Standard EN 13501-6, which translates the Euroclass classification. This is at the final voting stage in the relevant Technical Committee of the CEN.
- The "harmonised products" standard EN 50575, which sets out the essential requirements for the assessment and declaration of performance, the initial tests, the monitoring and the marking of products.

Once all these standards have been published and the public authorities have notified the European Commission about which bodies are approved for product certification, the certified products will then gradually appear in the marketplace bearing the CE markings and the statement of the Euroclass achieved. The French classification and the Euroclasses will operate side-by-side for a certain period. Subsequently, the CE markings and performance declarations will be mandatory.

| EUROCLASS              | CLASSIFICATION CRITERIA  | ADDITIONAL CRITERIA                              |
|------------------------|--|--|
| <b>A<sup>ca</sup></b>  | Fire load  |  |
| <b>B1<sup>ca</sup></b> | <b>Heat release +<br/>Vertical spread in bunched cables +<br/>Flame spread</b> | <b>Smoke emissions</b><br>(s1, s1a, s1b, s2, s3) |
| <b>B2<sup>ca</sup></b> |  | <b>Flaming droplets</b><br>(d0, d1, d2)          |
| <b>C<sup>ca</sup></b>  |  | <b>Acidity</b> (a1, a2, a3)                      |
| <b>D<sup>ca</sup></b>  |  |  |
| <b>E<sup>ca</sup></b>  | Flame spread   |  |
| <b>F<sup>ca</sup></b>  |  |  |

### EUROCLASS CLASSIFICATION CRITERIA

#### Fire load

Aca = Non-combustible (glass, silica, etc.)  
 B1ca = Combustible non-flammable  
 B2ca = Combustible low flammability  
 Cca = Combustible low flammability  
 Dca = Combustible moderate flammability  
 Eca = Combustible high flammability  
 Fca = not classified

#### Smoke opacity

(based on quantity and speed of production)  
 s1 = small quantity and slow production speed  
 s2 = moderate quantity and production speed  
 s3 = large quantity and fast production speed  
 s1a = results in better light transmittance than s1b

#### Flaming droplets and debris

d0: no debris  
 d1: no debris that burns for more than ten seconds  
 d2: debris that burns for more than ten seconds

#### Acidity and conductivity

a1: low conductivity and low acidity of solubilised combustion gases  
 a2: relatively low conductivity and low acidity of solubilised combustion gases  
 a3: high conductivity and acidity of solubilised combustion gases

(1) Caution, the reaction to fire relates to the performance of the cable when it is burning. It does not refer to its ability to do its work for a limited time in a fire (the term in this case is resistance to fire).

## List of standards

|                      |   |                     |   |
|----------------------|---|---------------------|---|
| <b>ANSI/IEEE 383</b> | IEEE Standard for Qualifying Class 1E Electric Cables and Field Splices for Nuclear Power Generating Stations   | <b>NF C 31-111</b>  | conductors in bare or tinned, cold-hardened or annealed copper, of circular cross-section obtained by single-filament or multi-filament drawing |
| <b>ASTM B 3</b>      | Standard Specification for Soft or Annealed Copper Wire   | <b>CR1 test</b>     | Tests for classification of conductors and cables with respect to their fire behaviour  |
| <b>ASTM B 8</b>      | Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft  | <b>NF C 42-323</b>  | Electric measurement devices - identification of thermocouples  |
| <b>ASTM B33</b>      | Standard Specification for Tin-Coated Copper or Annealed Copper Wire for Electrical Purposes  | <b>NF C 42-324</b>  | Extension and compensation cables for thermocouples   |
| <b>ASTM B 160</b>    | Standard Specification for Nickel Rod and Bar   | <b>NF C 93-521</b>  | Composition, nature of materials, manufacturing tests   |
| <b>ASTM B 170</b>    | Standard Specification for Oxygen-Free Electrolytic Copper - Refinery Shapes  | <b>NF C 93-523</b>  | Electronic components: Low frequency equipment wires and cables with solid or stranded conductors, PVC insulation and sheath.                   |
| <b>ASTM B 172</b>    | Standard Specification for Rope-Lay-Stranded Copper Conductors Having Bunch-Stranded Members, for Electrical Conductors                                 | <b>NF C 93-524</b>  | Electronic components: Insulated wires for high temperatures  |
| <b>ASTM B 173</b>    | Standard Specification for Rope-Lay-Stranded Copper Conductors Having Concentric-Stranded Members, for Electrical Conductors                            | <b>NF EN 13601</b>  | Electronic components: Insulated wires for high temperatures up to 150 °C   |
| <b>ASTM B 174</b>    | Standard Specification for Bunch-Stranded Copper Conductors for Electrical Conductors   | <b>NF EN 13602</b>  | Copper and copper alloys - Copper rod, bar and wire for general electrical purposes   |
| <b>ASTM B 193</b>    | Standard Test Method for Resistivity of Electrical Conductor Materials  | <b>NF EN 13603</b>  | Copper and copper alloys - Drawn, round copper wire for the manufacture of electrical conductors  |
| <b>ASTM B 298</b>    | Standard Specification for Silver-Coated Soft or Annealed Copper Wire   | <b>NF EN 13603</b>  | Copper and copper alloys - Test methods for assessing protective tin coatings on drawn round copper wire for electrical purposes                |
| <b>ASTM B 355</b>    | Standard Specification for Nickel-Coated Soft or Annealed Copper Wire   | <b>NF EN 50143</b>  | Cables for illuminated signs and illuminated discharge tubes  |
| <b>ASTM D149</b>     | Standard Test Method for Dielectric Breakdown Voltage and Dielectric Strength of Solid Electrical Insulating Materials at Commercial Power Frequencies  | <b>NF EN 50200</b>  | Method of test for resistance to fire of unprotected small cables for use in emergency circuits   |
| <b>CSA C22.2 210</b> | Appliance wiring material products  | <b>NF EN 50264</b>  | Railway applications - Railway rolling stock power and control cables having special fire performance   |
| <b>DIN 17740</b>     | Wrought nickel, chemical composition  | <b>NF EN 50305</b>  | Railway applications - Railway rolling stock cables having special fire performance - Test methods  |
| <b>DIN 17753</b>     | Wrought nickel and nickel alloy wires, characteristics  | <b>NF EN 50306</b>  | Railway applications - Railway rolling stock cables having special fire performance - Thin wall   |
| <b>DIN 40620</b>     | Varnished sleeveings (flexible with textile) used for electrical insulation   | <b>NF EN 50343</b>  | Railway applications - Rolling stock - Rules for installation of cabling  |
| <b>DIN 40628</b>     | Sleeveings based on silicone rubber   | <b>NF EN 50362</b>  | Method of test for resistance to fire of larger unprotected power and control cables for use in emergency circuits                              |
| <b>DIN 43712</b>     | Measurement and Control; electrical temperature sensors; wires for thermocouples  | <b>NF EN 50363</b>  | Insulating, sheathing and covering materials for low-voltage energy cables  |
| <b>DIN 43713</b>     | Electrical temperature sensors; wires and stranded wires for extension and compensating cables  | <b>NF EN 50382</b>  | Railway applications - Railway rolling stock high temperature power cables having special fire performance                                      |
| <b>DIN 43714</b>     | Measurement and Control; electrical temperature sensors; compensating cables for thermocouples  | <b>NF EN 50395</b>  | Electrical test methods for low voltage energy cables   |
| <b>DIN 43760</b>     | Measurement and Control: Electrical Temperature Sensors   | <b>NF EN 50396</b>  | Non-electrical test methods for low voltage energy cables   |
| <b>HD 308</b>        | Identification of cores in cables and flexible cords  | <b>NF EN 50525</b>  | Electric cables - Low voltage energy cables of rated voltages up to and including 450/750 V (U <sub>0</sub> /U)                                 |
| <b>HD 361</b>        | System for cable designation  | <b>NF EN 60228</b>  | Conductors of insulated cables  |
| <b>IEC 60079</b>     | Electrical apparatus for explosive gas atmospheres  | <b>NF EN 60335</b>  | Household and similar electrical appliances - Safety  |
| <b>IEC 60085</b>     | Electrical insulation - Thermal evaluation and designation  | <b>NF EN 60584</b>  | Thermocouples   |
| <b>IEC 60092</b>     | Electrical installations in ships   | <b>NF EN 60598</b>  | Luminaires  |
| <b>IEC 60189</b>     | Low-frequency cables with PVC insulation and PVC sheath   | <b>NF EN 60754</b>  | Tests on gases evolved during combustion of materials from cables   |
| <b>IEC 60227</b>     | Polyvinyl chloride insulated cables of rated voltages up to and including 450/750 V   | <b>NF EN 61034</b>  | Measurement of smoke density of cables burning under defined conditions   |
| <b>IEC 60228</b>     | Conductors of insulated cables  | <b>NF EN 62230</b>  | Electric cables - Spark-test method   |
| <b>IEC 60245</b>     | Rubber insulated cables - Rated voltages up to and including 450/750 V  | <b>NF F 16-101</b>  | Rolling stock. Fire behaviour. Materials selection  |
| <b>IEC 60287</b>     | Electric cables - Calculation of the current rating   | <b>NF C 87-201</b>  | Oil industry - Extension and compensation cables for thermocouples - Specifications   |
| <b>IEC 60331</b>     | Tests for electric cables under fire conditions - Circuit integrity   | <b>NF C 87-202</b>  | Oil industry - Instrumentation cables - Specifications  |
| <b>IEC 60332</b>     | Tests on electric and optical fibre cables under fire conditions  | <b>NF X 10-702</b>  | Fire test methods. Determination of the opacity of the fumes in an atmosphere without air renewal   |
| <b>IEC 60502</b>     | Power cables with extruded insulation and their accessories for rated voltages from 1 kV (U <sub>m</sub> = 1.2 kV) up to 30 kV (U <sub>m</sub> = 36 kV) | <b>NF X 70-100</b>  | Fire tests - Analysis of gaseous effluents  |
| <b>IEC 60584</b>     | Thermocouples   | <b>NF X 70-101</b>  | Fire tests - Analysis of gaseous effluents  |
| <b>IEC 60695</b>     | Fire hazard testing   | <b>UL 94</b>        | Tests for Flammability of Plastic Materials for Parts in Devices and Appliances   |
| <b>IEC 60751</b>     | Industrial platinum resistance thermometers   | <b>UL 758</b>       | Appliance Wiring Material   |
| <b>IEC 60754</b>     | Tests on gases evolved during combustion of materials from cables   | <b>UL 1441</b>      | Coated Electrical Sleeveing   |
| <b>IEC 60811</b>     | Electric and optical fibre cables - Test methods for non-metallic materials   | <b>UL 1581</b>      | Reference Standard for Electrical Wires, Cables, and Flexible Cords   |
| <b>IEC 60949</b>     | Calculation of thermally permissible short-circuit currents, taking into account non-adiabatic heating effects  | <b>UTE C 93-521</b> | Electronic components. Low frequency equipment wires and cables with solid or stranded conductors, PVC insulation and sheath                    |
| <b>IEC 61034</b>     | Measurement of smoke density of cables burning under defined conditions   | <b>UTE C 93-523</b> | Electronic components. Insulated wires for high temperatures  |
| <b>IEC 62230</b>     | Electric cables - Spark-test method   | <b>UTE C 93-524</b> | Electronic components. Insulated wires for high temperatures up to 150 °C   |
| <b>JIS C 1602</b>    | Thermocouples   | <b>VDE 0207</b>     | Insulating and sheathing compounds for cables and flexible cords  |
| <b>JIS C 1610</b>    | Compensating Lead Wires   | <b>VDE 0250</b>     | Cables, wires and flexible cords for power installations  |
| <b>MIL-W-22759</b>   | Military Specification Sheet : Wire, Electric, Fluoropolymer-insulated  | <b>VDE 0472</b>     | Testing of cables, wires and flexible cords   |
| <b>NF C 15-100</b>   | Low voltage electrical installations  |                     |   |
| <b>NF C 20-453</b>   | Basic environmental testing procedures - Test methods.  |                     |   |
|                      | Conventional determination of corrosiveness of smoke  |                     |   |
| <b>NF C 20-454</b>   | Analysis and titrations of gases evolved during pyrolysis or combustion of materials used in electro-technical systems                                  |                     |   |
| <b>NF C 32-018</b>   | Conductors of small wires and cables  |                     |   |



# Names and symbols

As per NF X 02-004

In this paragraph, we provide examples of usual physical quantities with the corresponding units and symbols, along with the expression of derived units in base units and supplementary units.

## Physical quantities and base units of the International system of units

| PHYSICAL QUANTITY           | UNIT     | SYMBOL |
|-----------------------------|----------|--------|
| length                      | metre    | m      |
| mass                        | kilogram | kg     |
| time                        | second   | s      |
| electrical current strength | ampere   | A      |
| thermodynamic temperature   | Kelvin   | K      |
| quantity of material        | mole     | mol    |
| light intensity             | candela  | cd     |

Note: The temperature in Celsius  $t$  is associated to the thermodynamic temperature  $T$  via the relationship  $t = T - 273.15$

A temperature interval may be expressed either in Kelvins or in degrees Celsius.

In this case,  $1^{\circ}\text{C} = 1\text{ K}$

## Supplementary physical quantities and units of the international system (which may be used as quantities and base units)

| PHYSICAL QUANTITY | UNIT      | SYMBOL |
|-------------------|-----------|--------|
| plane angle       | radian    | rad    |
| solid angle       | steradian | sr     |

## Table presenting the main multiples and sub-multiples of units of measurement

| Factor     | MULTIPLES     |        |
|------------|---------------|--------|
|            | Prefix        | Symbol |
| $10^{18}$  | exa           | E      |
| $10^{15}$  | peta          | P      |
| $10^{12}$  | tera          | T      |
| $10^9$     | giga          | G      |
| $10^6$     | mega          | M      |
| $10^3$     | kilo          | k      |
| $10^2$     | hecto         | h      |
| $10^1$     | deca          | da     |
| Factor     | SUB-MULTIPLES |        |
|            | Prefix        | Symbol |
| $10^{-1}$  | deci          | d      |
| $10^{-2}$  | centi         | c      |
| $10^{-3}$  | milli         | m      |
| $10^{-6}$  | micro         | $\mu$  |
| $10^{-9}$  | nano          | n      |
| $10^{-12}$ | pico          | p      |
| $10^{-15}$ | femto         | f      |
| $10^{-18}$ | atto          | a      |

## Some quantities and derived units of the International system of units:

| PHYSICAL QUANTITY     | UNIT   |                                   | IN BASE UNITS                 |
|-----------------------|--|-----------------------------------|-------------------------------|
|                       | NAME   | SYMBOL                            |                               |
| SPACE TIME            | surface area                                       | square metre                      | $\text{m}^2$                  |
|                       | volume   | cubic metre                       | $\text{m}^3$                  |
|                       | angular speed                                      | radian per second                 | $\text{rad.s}^{-1}$           |
|                       | speed  | metre per second                  | $\text{m.s}^{-1}$             |
|                       | acceleration                                       | metre per squared second          | $\text{m.s}^{-2}$             |
| MECHANICAL            | frequency  | hertz                             | $\text{Hz}$                   |
|                       | frequency of rotation                              | second to the power minus 1       | $\text{s}^{-1}$               |
|                       | density  | kilogram per cubic metre          | $\text{kg.m}^{-3}$            |
|                       | mass flow  | kilogram per second               | $\text{kg.s}^{-1}$            |
|                       | volume flow  | cubic metre per second            | $\text{m}^3.\text{s}^{-1}$    |
|                       | quantity of movement                               | kilogram-metre per second         | $\text{kg.m.s}^{-1}$          |
|                       | kinetic moment                                     | kilogram-metre squared per second | $\text{kg.m}^2.\text{s}^{-1}$ |
|                       | moment of inertia                                  | kilogram-metre squared            | $\text{kg.m}^2$               |
|                       | force  | Newton                            | $\text{kg.m.s}^{-2}$          |
|                       | moment of force                                    | Newton-metre                      | $\text{kg.m}^2.\text{s}^{-2}$ |
| THERMO-DYNAMIC        | pressure, stress                                   | Pascal                            | $\text{Pa}$                   |
|                       | dynamic viscosity                                  | Pascal-second                     | $\text{Pa.s}$                 |
|                       | kinematic viscosity                                | square metre per second           | $\text{m}^2.\text{s}^{-1}$    |
|                       | surface tension                                    | Newton per metre                  | $\text{N/m}$                  |
|                       | energy, work, heat                                 | joule                             | $\text{J}$                    |
|                       | power, energy flow                                 | watt                              | $\text{W}$                    |
|                       | linear dilation coefficient                        | Kelvin to the power minus 1       | $\text{K}^{-1}$               |
|                       | Thermal conductivity                               | watt per metre-Kelvin             | $\text{W/(m.K)}$              |
|                       | Specific heat capacity                             | joule per kilogram-Kelvin         | $\text{J/(kg.K)}$             |
|                       | entropy  | joule per Kelvin                  | $\text{J/K}$                  |
| OPTICAL               | internal energy, enthalpy                          | joule                             | $\text{J}$                    |
|                       | free energy, free enthalpy                         | joule                             | $\text{J}$                    |
|                       | light flow   | lumen                             | $\text{lm}$                   |
|                       | luminous luminance                                 | candela per cubic metre           | $\text{cd/m}^2$               |
|                       | luminous exitance                                  | lumen per cubic metre             | $\text{lm/m}^2$               |
|                       | illumination                                       | lux                               | $\text{lx}$                   |
|                       | luminous exposure                                  | lux-second                        | $\text{lx.s}$                 |
|                       | luminous efficiency                                | lumen per watt                    | $\text{lm/W}$                 |
|                       | electrical charge, quantity of electricity         | coulomb                           | $\text{C}$                    |
|                       | electrical field                                   | volt per metre                    | $\text{V/m}$                  |
| ELECTRICITY MAGNETISM | potential difference, voltage, electromotive force | volt                              | $\text{V}$                    |
|                       | capacitance  | farad                             | $\text{F}$                    |
|                       | magnetic field                                     | ampere per metre                  | $\text{A/m}$                  |
|                       | magnetic induction                                 | Tesla                             | $\text{T}$                    |
|                       | magnetic induction flow                            | Weber                             | $\text{Wb}$                   |
|                       | inductance, permeance                              | Henry                             | $\text{H}$                    |
|                       | reluctance   | Henry to the power minus 1        | $\text{H}^{-1}$               |
|                       | resistance, impedance, reactance                   | ohm                               | $\Omega$                      |
|                       | conductance, admittance, susceptance               | siemens                           | $\text{S}$                    |
|                       | resistivity  | ohm-metre                         | $\Omega.\text{m}$             |
| CHEMISTRY PHYSICS     | conductivity                                       | siemens per metre                 | $\text{S/m}$                  |
|                       | molar mass   | kilogram per mole                 | $\text{kg/mol}$               |
|                       | molar volume                                       | cubic metre per mole              | $\text{m}^3.\text{mol}^{-1}$  |
|                       | concentration                                      | kilogram per cubic metre          | $\text{kg.m}^{-3}$            |
|                       | molar concentration                                | mole per cubic metre              | $\text{mol.m}^{-3}$           |
|                       | molarity   | mole per kilogram                 | $\text{mol.kg}^{-1}$          |

## Form

## Main conversion factors for units of measure

| Units  | Conversion factor         | Units                                    | Conversion factor          |
|--|---------------------------|--|----------------------------|
| <b>Length (conversion in metres)</b>                                     |                           |  |                            |
| ångström (Å)   | 1.10 <sup>-10</sup>       | mile                                     | 1.609344.10 <sup>3</sup>   |
| light year   | 9.46073.10 <sup>15</sup>  | nautical mile                            | 1.852.10 <sup>3</sup>      |
| fermi (fm)   | 1.10 <sup>-15</sup>       | pica                                     | 4.2175.10 <sup>3</sup>     |
| foot (ft)  | 3.048.10 <sup>-1</sup>    | point [US]                               | 3.515.10 <sup>-4</sup>     |
| inch (in)  | 2.54.10 <sup>-2</sup>     | rod                                      | 5.0292.10 <sup>0</sup>     |
| micron (μ)   | 1.10 <sup>-6</sup>        | sigma (σ)                                | 1.10 <sup>-12</sup>        |
| mil  | 2.54.10 <sup>-5</sup>     | yard [yd]                                | 9.144.10 <sup>-1</sup>     |
| <b>Surface area (conversion in metres)</b>                               |                           |  |                            |
| centiare (ca)  | 1.10 <sup>0</sup>         | circular mil                             | 5.067075.10 <sup>-10</sup> |
| are (a)  | 1.10 <sup>2</sup>         | rood                                     | 1.01171.10 <sup>3</sup>    |
| hectare (ha)   | 1.10 <sup>4</sup>         | acre                                     | 4.04686.10 <sup>3</sup>    |
| <b>Volume (conversion in cubic metres)</b>                               |                           |  |                            |
| barrel [US]  | 1.58987.10 <sup>-1</sup>  | gill [UK]                                | 1.42065.10 <sup>-4</sup>   |
| board foot   | 2.36.10 <sup>-3</sup>     | gill [US] (gi)                           | 1.18294.10 <sup>-4</sup>   |
| bushel [UK]  | 3.63687.10 <sup>-2</sup>  | liquid pint [US] (liq pt)                | 4.73176.10 <sup>-4</sup>   |
| bushel [US] (bu)   | 3.52391.10 <sup>-2</sup>  | liquid quart [US] (liq qt)               | 9.46352.10 <sup>-4</sup>   |
| dry barrel [US] (bbl)  | 1.15627.10 <sup>-1</sup>  | litre (l)                                | 1.10 <sup>-3</sup>         |
| dry pint [US] (dry pt)   | 5.50610.10 <sup>-4</sup>  | minim [UK] (min)                         | 5.91939.10 <sup>-8</sup>   |
| dry quart [US] (dry qt)  | 1.10122.10 <sup>-3</sup>  | minim [US] (min)                         | 6.16115.10 <sup>-8</sup>   |
| fluid ounce [UK] (fl oz)   | 2.84130.10 <sup>-5</sup>  | peck [UK]                                | 9.0922.10 <sup>-3</sup>    |
| fluid ounce [US] (fl oz)   | 2.95735.10 <sup>-5</sup>  | peck [US]                                | 8.809768.10 <sup>-3</sup>  |
| gallon [UK] (gal)  | 4.54609.10 <sup>-3</sup>  | quart [UK] (qt)                          | 1.13652.10 <sup>-3</sup>   |
| gallon [US] (gal)  | 3.78541.10 <sup>-3</sup>  |  |                            |
| <b>Planar angle (conversion in radians)</b>                              |                           |  |                            |
| degree (°)   | 1.745329.10 <sup>-2</sup> | minute (')                               | 2.908882.10 <sup>-4</sup>  |
| grade (gr)   | 1.570796.10 <sup>-2</sup> | second (")                               | 4.848137.10 <sup>-6</sup>  |
| <b>Time (conversion in seconds)</b>                                      |                           |  |                            |
| hour (h)   | 3.6.10 <sup>3</sup>       | minute (min)                             | 6.10 <sup>1</sup>          |
| day (d)  | 8.64.10 <sup>4</sup>      |  |                            |
| <b>Mass (conversion in kilogrammes)</b>                                  |                           |  |                            |
| cental   | 4.53592.10 <sup>1</sup>   | ton (ton)                                | 1.016047.10 <sup>3</sup>   |
| long ton [US]  | 1.016047.10 <sup>3</sup>  | tonne (t)                                | 1.10 <sup>3</sup>          |
| ounce (oz)   | 2.834952.10 <sup>-2</sup> | troy ounce                               | 3.11035.10 <sup>-2</sup>   |
| pound (lb)   | 4.535924.10 <sup>-1</sup> | troy pound                               | 3.73242.10 <sup>-1</sup>   |
| quintal (q)  | 1.10 <sup>2</sup>         | atomic mass (u)                          | 1.66054.10 <sup>-27</sup>  |
| short ton (sh tn)  | 9.07185.10 <sup>2</sup>   |  |                            |
| <b>Speed (conversion in metres per second)</b>                           |                           |  |                            |
| knot   | 5.14444.10 <sup>-4</sup>  |  |                            |
| <b>Force (conversion in Newtons)</b>                                     |                           |  |                            |
| dyne (dyn)   | 1.10 <sup>-5</sup>        | pound-force (lbf)                        | 4.44822.10 <sup>0</sup>    |
| kilogram-force (kgf)   | 9.80665.10 <sup>0</sup>   | poundal (pdl)                            | 1.38255.10 <sup>-1</sup>   |
| pond (p)   | 9.80665.10 <sup>-3</sup>  |  |                            |
| <b>Energy transferred, work (conversion in joules)</b>                   |                           |  |                            |
| british thermal unit (Btu)   | 1.055056.10 <sup>3</sup>  | kilogramme (kgm)                         | 9.80665.10 <sup>0</sup>    |
| calorie I.T. (cal I.T.)  | 4.1868.10 <sup>0</sup>    | therm                                    | 1.055056.10 <sup>8</sup>   |
| calorie 15°C (cal 15)  | 4.1855.10 <sup>0</sup>    | thermie (th)                             | 4.1855.10 <sup>6</sup>     |
| electronvolt (eV)  | 1.60218.10 <sup>-19</sup> | thermochemical calorie (calth)           | 4.1840.10 <sup>0</sup>     |
| frigorie (fg)  | -4.1855.10 <sup>3</sup>   | watthour (Wh)                            | 3.6.10 <sup>3</sup>        |
| <b>Power (conversion in watts)</b>                                       |                           |  |                            |
| horsepower (hp)  | 7.35499.10 <sup>2</sup>   | var (var)                                | 1.10 <sup>0</sup>          |
| horsepower [UK] (hp)   | 7.4570.10 <sup>2</sup>    |  |                            |
| <b>Stress and pressure (conversion in Pascals)</b>                       |                           |  |                            |
| normal atmosphere (atm)  | 1.01325.10 <sup>5</sup>   | inch of mercury (inHg)                   | 3.38639.10 <sup>3</sup>    |
| technical atmosphere (at)  | 9.80665.10 <sup>4</sup>   | millimetre of water (mmH <sub>2</sub> O) | 9.80665.10 <sup>0</sup>    |
| bar (bar)  | 1.10 <sup>5</sup>         | millimetre of mercury (mmHg)             | 1.333224.10 <sup>2</sup>   |
| foot of water (ftH <sub>2</sub> O)                                       | 2.98907.10 <sup>3</sup>   | pound-force per square inch (psi)        | 6.894757.10 <sup>3</sup>   |
| inch of water (inH <sub>2</sub> O)                                       | 2.49089.10 <sup>2</sup>   | torr (Torr)                              | 1.333224.10 <sup>2</sup>   |
| <b>Magnetomotive force (conversion in amperes)</b>                       |                           |  |                            |
| gilbert (Gb)   | 7.9577.10 <sup>-1</sup>   |  |                            |
| <b>Quantity of electricity, electric charge (conversion in coulombs)</b> |                           |  |                            |
| ampere-hour (Ah)   | 3.6.10 <sup>3</sup>       | franklin (Fr)                            | 3.33564.10 <sup>-10</sup>  |
| faraday (F)  | 9.64870.10 <sup>4</sup>   |  |                            |
| <b>Radioactivity (conversion in bequerels)</b>                           |                           |  |                            |
| curie (Ci)   | 03/07/2010 <sup>10</sup>  |  |                            |
| <b>Exposure (conversion in coulombs per kilogramme)</b>                  |                           |  |                            |
| röntgen (R)  | 2.58 x 10 <sup>-4</sup>   |  |                            |

## Temperature conversion factors

Tc: temperature in degrees Celsius

Tk: temperature in degrees Kelvin

Tf: temperature in degrees Fahrenheit

Tc = Tk - 273.15

Tc = 5/9 \* (Tf - 32)

Tf = 1.8 \* Tk - 459.67

Tf = 9/5 \* Tc + 32

Table of correspondences between American (AWG) and metric (mm<sup>2</sup>) cross-sections

AWG: American Wire Gauge. MCM: thousands of circular mils

| Cross-sections |        |                 | Diameter |         |
|----------------|--------|-----------------|----------|---------|
| AWG            | MCM    | mm <sup>2</sup> | mm       | inch    |
| -              | 750    | 380             | -        | -       |
| -              | 700    | 355             | -        | -       |
| -              | 600    | 304             | -        | -       |
| -              | 500    | 253             | -        | -       |
| -              | 400    | 203             | -        | -       |
| -              | 350    | 177             | -        | -       |
| -              | 300    | 152             | -        | -       |
| -              | 250    | 127             | -        | -       |
| 4/0            | 212    | 107             | 11.7     | 0.4600  |
| 3/0            | 168    | 85.0            | 10.4     | 0.4096  |
| 2/0            | 133    | 67.5            | 9.27     | 0.3648  |
| 1/0            | 105    | 53.4            | 8.25     | 0.3249  |
| 1              | 83.7   | 42.4            | 7.35     | 0.2893  |
| 2              | 66.4   | 33.6            | 6.54     | 0.2576  |
| 3              | 52.6   | 26.7            | 5.83     | 0.2294  |
| 4              | 41.7   | 21.2            | 5.19     | 0.2043  |
| 5              | 33.1   | 16.8            | 4.62     | 0.1819  |
| 6              | 26.2   | 13.3            | 4.11     | 0.1620  |
| 7              | 20.8   | 10.6            | 3.67     | 0.1443  |
| 8              | 16.5   | 8.35            | 3.26     | 0.1285  |
| 9              | 13.1   | 6.62            | 2.91     | 0.1144  |
| 10             | 10.4   | 5.27            | 2.59     | 0.1019  |
| 11             | 8.23   | 4.15            | 2.30     | 0.0907  |
| 12             | 6.53   | 3.31            | 2.05     | 0.0808  |
| 13             | 5.18   | 2.63            | 1.83     | 0.0720  |
| 14             | 4.11   | 2.08            | 1.63     | 0.0641  |
| 15             | 3.26   | 1.65            | 1.45     | 0.0571  |
| 16             | 2.58   | 1.31            | 1.29     | 0.0508  |
| 17             | 2.05   | 1.04            | 1.15     | 0.04526 |
| 18             | 1.62   | 0.823           | 1.024    | 0.04030 |
| 19             | 1.29   | 0.653           | 0.912    | 0.03589 |
| 20             | 1.02   | 0.512           | 0.812    | 0.03196 |
| 21             | 0.810  | 0.412           | 0.723    | 0.02846 |
| 22             | 0.642  | 0.325           | 0.644    | 0.02535 |
| 23             | 0.509  | 0.259           | 0.573    | 0.02257 |
| 24             | 0.404  | 0.205           | 0.511    | 0.02010 |
| 25             | 0.320  | 0.163           | 0.455    | 0.01790 |
| 26             | 0.254  | 0.128           | 0.405    | 0.01594 |
| 27             | 0.201  | 0.102           | 0.361    | 0.01420 |
| 28             | 0.160  | 0.0804          | 0.321    | 0.01264 |
| 29             | 0.126  | 0.0646          | 0.286    | 0.01126 |
| 30             | 0.100  | 0.0503          | 0.255    | 0.01003 |
| 31             | 0.080  | 0.0400          | 0.227    | 0.00893 |
| 32             | 0.063  | 0.0320          | 0.202    | 0.00795 |
| 33             | 0.050  | 0.0252          | 0.180    | 0.00708 |
| 34             | 0.039  | 0.0200          | 0.160    | 0.00630 |
| 35             | 0.031  | 0.0161          | 0.143    | 0.00561 |
| 36             | 0.025  | 0.0123          | 0.127    | 0.00500 |
| 37             | 0.019  | 0.0100          | 0.113    | 0.00445 |
| 38             | 0.015  | 0.00795         | 0.101    | 0.00397 |
| 39             | 0.012  | 0.00632         | 0.0897   | 0.00353 |
| 40             | 0.0096 | 0.00490         | 0.0789   | 0.00310 |

Other conversion factors  
metric system / Anglo-Saxon system

|                    |   |         |   |                    |
|--------------------|---|---------|---|--------------------|
| millimetres        | x | 0.03937 | = | inches             |
| millimetres        | x | 39.37   | = | mils               |
| metres             | x | 39.37   | = | inches             |
| metres             | x | 3.280   | = | feet               |
| inches             | x | 25.40   | = | millimetres        |
| feet               | x | 0.3048  | = | metres             |
| mils               | x | 0.0254  | = | millimetres        |
| kilograms          | x | 2.205   | = | pounds             |
| pounds             | x | 0.4536  | = | kilograms          |
| Ω / km             | x | 0.3048  | = | Ω / 1000 feet      |
| Ω / 1000 feet      | x | 3.281   | = | Ω / km             |
| pounds / 1000 feet | x | 1.488   | = | kg / km            |
| square inches      | x | 645.2   | = | square millimetres |
| square millimetres | x | 1.273   | = | circular mm        |
| square millimetres | x | 1973.5  | = | circular mils      |
| square mils        | x | 1.273   | = | circular mils      |
| circular mm        | x | 1550    | = | circular mils      |
| circular mm        | x | 0.7854  | = | square millimetres |

www.omerin.com


The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.

For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.

® Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.

## Notes

[illegible]





**omerin**  
division principale

Headquarters and division principale  
Zone industrielle - 63600 Ambert - France

Tel. +33 (0)4 73 82 50 00

Fax +33 (0)4 73 82 50 10

e-mail: [omerin@omerin.com](mailto:omerin@omerin.com)

**omerin**  
division silisol

division silisol  
B.P. 87 - 11, allée du Couchant Z.I. du Devey  
42010 Saint-Etienne Cedex 2 - France

Tel. +33 (0)4 77 81 36 00

Fax +33 (0)4 77 81 37 00

e-mail: [silisol@omerin.com](mailto:silisol@omerin.com)

**[www.omerin.com](http://www.omerin.com)**