



HIFLEX® INSTRUM.
DS IS 600 105°C
Dual & Individually shielded

- 600 V
- Operating temp. -50°C to +105°C
- High flexibility (>4 millions cycles in cable carrier)
- Excellent mechanical strength
- Excellent chemical & UV resistance
- Enhanced fire performance

Construction


- 1- Stranded tin plated copper conductor
- 2- Extruded fluoropolymer insulation
- 3 - FEP coated
- 4 - Tinned copper drain wires (for each twisted pair & general)
- 5 - Aluminum / PET tape
- 6 - Tinned copper braid
- 7 - Polyurethane jacket

Approvals - standards

- Compliance UL/cUL file E93624
- Compliance CSA MC 177410
- RoHS Compliant

Options

TPE jacketed / TPE insulation version 90°C
please contact us

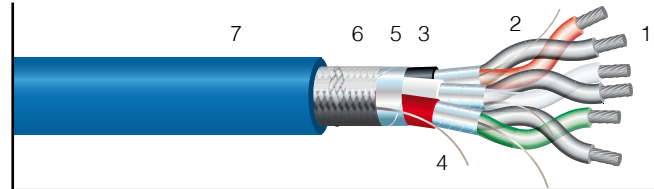

Use: External interconnection of electronic equipment

Standard products

Color coding = ICEA Method 1 Table E-1 (formerly K-1)
Outer jacket standard color: Blue (Consult us for other colors)
Surface marking

UL		20952					
cUL		AWM II A/B					
Nb of pairs	AWG Size	Nominal stranding (Nb x AWG)	Insulation wall (in)	Drain wire (AWG)	Jacket thickness (in)	Nominal OD (in)	Approx. linear weight (lbs/mft)
2P	24	19 x 36	.010	26	.045	.330	70
3P	24	19 x 36	.010	26	.050	.360	80
4P	24	19 x 36	.010	26	.055	.385	86
6P	24	19 x 36	.010	26	.060	.470	126
9P	24	19 x 36	.010	26	.065	.570	160
12P	24	19 x 36	.010	26	.070	.600	215
2P	20	19 x 32	.010	22	.050	.405	74
3P	20	19 x 32	.010	22	.050	.430	92
4P	20	19 x 32	.010	22	.055	.475	118
6P	20	19 x 32	.010	22	.060	.570	161
9P	20	19 x 32	.010	22	.065	.715	247
12P	20	19 x 32	.010	22	.075	.730	264
18P	20	19 x 32	.010	22	.080	.850	540
2P	18	19 x 30	.010	20	.060	.440	110
3P	18	19 x 30	.010	20	.060	.490	142
4P	18	19 x 30	.010	20	.065	.540	163
6P	18	19 x 30	.010	20	.075	.650	245
9P	18	19 x 30	.010	20	.080	.790	320
12P	18	19 x 30	.010	20	.080	.840	405
2P	16	19 x 29	.010	20	.055	.465	136
3P	16	19 x 29	.010	20	.055	.490	158
4P	16	19 x 29	.010	20	.060	.545	196
Flame ratings		Cable Flame, VW-1 / FT1					

Other number of singles and AWG sizes on request
Other style nos. available; please consult our complete list of UL approved styles (pages 92 to 96)
Further information concerning conducting metal; please consult our complete list of UL approved styles (pages 92 to 96)
■ UL approved only



OMERIN USA, Inc. QS Technologies division
95 Research Parkway, Meriden,
Connecticut 06450
Phone: 203-237-2297
qstech@omerin.com

www.omerin.com

® Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN. The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force. For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.