

### CSC2K Silicon elastomer insulated drain-line heaters with integrated thermostat



#### Characteristics

- Integrated thermostat.
- Heating section fully sealed.
- Double insulation.
- Extremely flexible.
- Voltage 230 V as standard.
- Power cable length: 1m.as standard
- Special production on request.

#### Applications

CSC2K heaters are designed to be placed at the bottom of collector trays inside refrigeration equipment in cold rooms, to prevent freezing and to allow condensate water to flow freely.


The integrated thermostat makes them fully autonomous. It must not be immersed.

Note: The most commonly used power rating is 50 W/m. However, for plastic trays, we strongly recommend using the 40W/m range.



#### Standards

CEI 62395-1  
CEI 62395-2

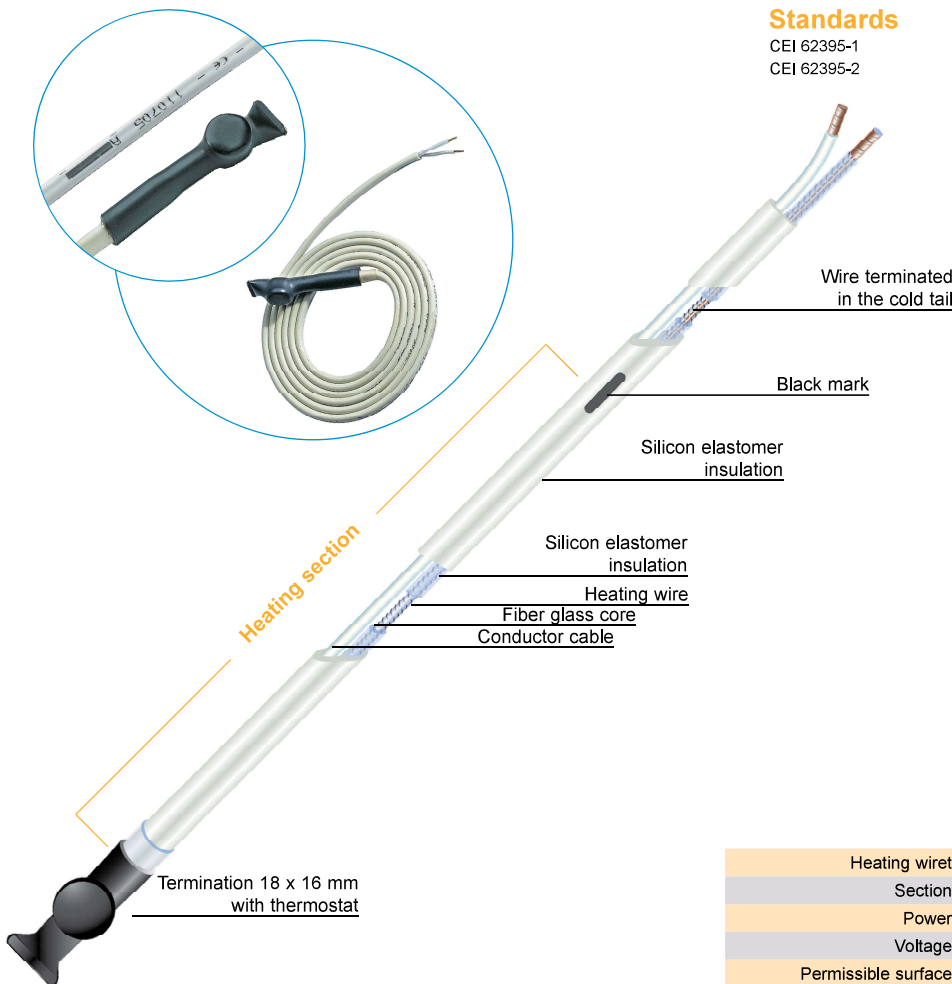

#### Standard models

Length (m)	CSC2K	
	40 W/m	50 W/m
1	40 W	50 W
1.3	52 W	65 W
1.5	60 W	75 W
2	80 W	100 W
3	120 W	150 W
4	160 W	200 W
5	200 W	250 W
6	240 W	300 W

CSC2K	
Heating wire	Nickel-Copper or Nickel-Chrome
Section	5 x 7 mm
Power	40 or 50 W/m
Voltage	230 V as standard
Permissible surface temperature	from - 40°C to + 110°C
Tolerances	Power : ± 10 % Diameter : + 0.2 / - 0.1 mm Length : ± 1 %
End insulation	Heat-shrink sheath with adhesive
Thermostat	Pre-set to + 5°C/+ 15°C as standard
Ingress protection code	Cable IP67 - Thermostat IP54
Minimum bending radius	6 x the thickness

#### Caution

These cables must never be cut to shorten the cold tail. The round part of the thermostat (sensor) must be placed in the best position to collect information so that the cable can operate as required.

#### Use

Drain-line heaters are serie resistors. Consult the pages of the catalogue devoted to the corresponding general operating principles, general instructions for use and accessories.

#### FLEXELEC S.A.S

10, rue des frères Lumière  
Z.A. du Bois Rond  
69720 ST BONNET DE MURE - FRANCE  
Tél : + 33 (0)4.72.48.30.90

E-mail : [flexelec@omerin.com](mailto:flexelec@omerin.com)

#### FLEXELEC Dept

OMERIN ASIA Pte Ltd  
51 Goldhill Plaza #08-11  
SINGAPORE 308900  
Tel : + 65.6255.4778  
Fax : + 65.6255.4779  
E-mail : [sales@omerin.com.sg](mailto:sales@omerin.com.sg)

#### FLEXELEC (UK) Ltd

Unit 11 Kings Park Industrial Estate  
Primrose Hill - KINGS LANGLEY  
Hertfordshire - WD4 8ST - UK  
Tel : + 44 (0) 1923.274477  
Fax : + 44 (0) 1923.270264  
E-mail : [sales@omerin.co.uk](mailto:sales@omerin.co.uk)

#### FLEXELEC Dept

OMERIN GmbH  
Buchwiese 16  
D-65510 IDSTEIN - GERMANY  
Tel : + 49 (0) 6126.94.31-0  
Fax : + 49 (0) 6126.83.999  
E-mail : [omerinmbh@omerin.com](mailto:omerinmbh@omerin.com)