


SILICOUL® SCR PUR 6.6 kV -40 °C to +150°C

SILICONE INSULATED AND POLYURETHANE SHEATHED
MEDIUM VOLTAGE POWER CABLES

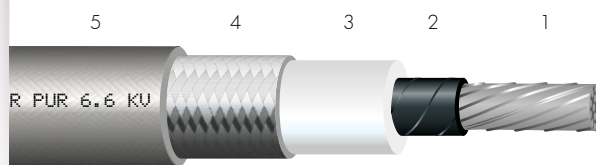

- 1 • Flexible tin-plated copper core – class 5 as per IEC 60228.
- 2 • Semi-conductor tape(s).
- 3 • Insulation: Silicone rubber.
- 4 • Electrical shielding: Tin-plated copper braid.
- 5 • Sheath: Polyurethane thermoplastic elastomer.

Approvals - standards

- Compliance with the standard: IEC 60228.

Applications

- All industrial applications for which power cables can be submitted to oil, hydrocarbons, humidity or mechanical forces.
 - Cabling for rotating machines: motors, alternators, generators.
 - Cabling for static machines: transformers, inductors, inverters, choppers.
 - Power cabinets.

Options

- Extra-flexible tin-plated copper core – class 6 as per IEC 60228: contact us.
- Flexible or extra-flexible bare copper, silver-plated or nickel-plated copper core – class 5 or 6 as per IEC 60228: contact us.
 - Outer flexible armour:
 - > Galvanised steel braid (ref. SILICOUL® SCR PUR BG 6.6 kV): contact us.
 - > Stainless steel braid (ref. SILICOUL® SCR PUR BI 6.6 kV): contact us.
- Multi-conductor cable made up of an assembly of several single conductor cables SILICOUL® SCR PUR 6.6 kV: contact us.
 - Other markings: contact us.
 - Other colours: contact us.
- Other nominal cross-sections: contact us.
- Other options and/or combinations of the options outlined above: contact us.

Characteristics

General

- Continuous operating temperature: -40 °C to +150°C.
- Excellent resistance to oil and hydrocarbons.
- Good resistance to humidity.
- Excellent mechanical strength.

Electrical

- Rated voltage: 6.6 kV.
- Test voltage: 15 kV.

Standard products

- Standard insulation colour: white.
- Standard sheath colour: grey.
- Standard marking: OMERIN – SILICOUL SCR PUR 6.6 kV – {cross-section/mm²}

SILICOUL® SCR PUR 6.6 kV

Flexible core • class 5 as per IEC 60228			INSULATED WIRE OR CABLE	
Nominal cross-section (mm ²)	Nominal stranding	Maximum linear resistance at 20 °C (Ω/km)	Nominal diameter (mm)	Approximate linear weight (kg/km)
2.5	50 x 0.25	8.21	10.5	139
4	56 x 0.30	5.09	11.1	161
6	84 x 0.30	3.39	12.0	193
10	80 x 0.40	1.95	13.4	249
16	126 x 0.40	1.24	14.6	326
25	196 x 0.40	0.795	16.3	438
35	276 x 0.40	0.565	17.9	569
50	396 x 0.40	0.393	20.2	752
70	360 x 0.50	0.277	21.8	969
95	485 x 0.50	0.210	23.3	1195
120	608 x 0.50	0.164	26.1	1472
150	756 x 0.50	0.132	27.3	1799
185	944 x 0.50	0.108	30.4	2216
240	1221 x 0.50	0.0817	34.4	2864
300	1525 x 0.50	0.0654	36.6	3420
400	2037 x 0.50	0.0495	41.5	4474

For this product, please contact:

OMERIN division principale
 Zone Industrielle - F 63600 Ambert
 Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10
 omerin@omerin.com

www.omerin.com

omerin
LES CABLES DE L'EXTREME

The information provided in this technical data sheet is indicative and may be modified without prior notice, laying, wiring and electrical conditions and the environment of the cable can not be fully considered in our studies. In no way the company OMERIN shall be held responsible for any incidents in the case of inappropriate uses, particularly in the case of wiring conditions that do not respect the good practice and the standards in force.
 For an optimum use of the cables produced by our company, we recommend testing in real conditions. Our sales department is available for a possible provision of samples, and/or for the conditions of a complete study in our laboratories.
 © Registered trademark of the OMERIN Group. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.